

Creide series


Luci Creide F 150

Luci Creide F 150


 **Luci**

Luci Pte. Ltd.


2018.06.08

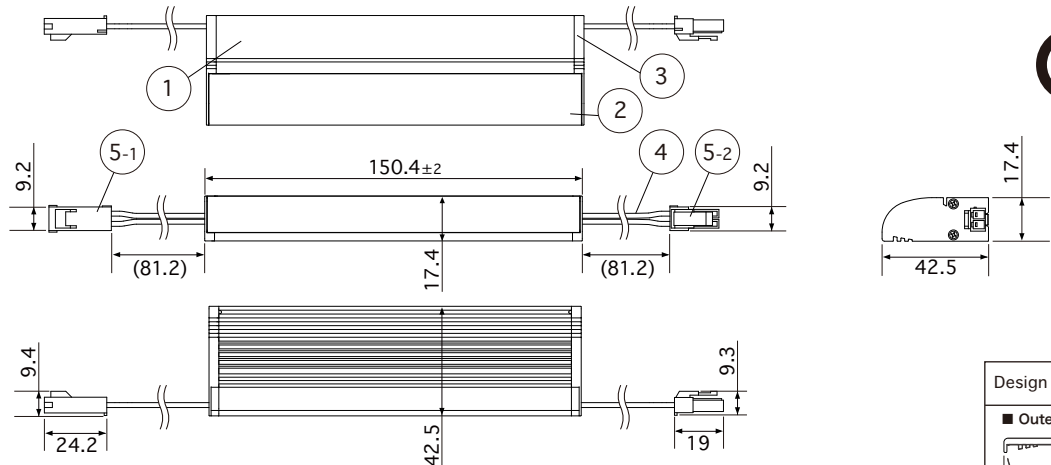
Accessories • Option parts :
Mounting clip for Creide (LCE-PTA) (2pcs/1bag)

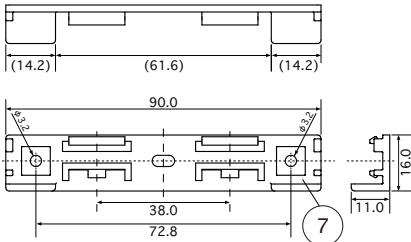

Option parts :
Outer clip for Creide(LCE-PT-B)(2pcs/1bag)




Option parts:
Power supply cable 3000mm (CAD-3000-MCRN-I)

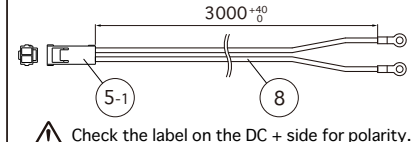


Option parts : Magnet set L (MG-L)

Magnet set A(MG-A)




Option parts:1000 mm of Lead wire cable with

SL connector (CAD-1000-MCFC-I)

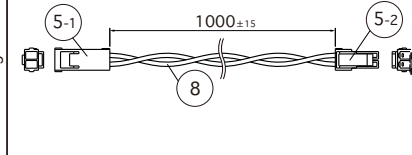


Design guide


■ Outer clip




■ Magnet set L



■ Magnet set A



The specifications and prices are subject to change without prior notice. Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body	Aluminum	Alumite treatment, White painting	
2	Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead Wire		UL1007 AWG20	
5	Connector	Nylon	5-1:SLR-02VF(JST) White 5-2:SLP-02V(JST) White	
6	Magnet set	Neogium, Stainless steel	Silver	
7	Mounting clip	Polycarbonate	Clear	
8	Lead Wire		UL1007 AWG20	
9	Outer clip	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 70g	Light Source color : White	: W : 4000K (195 lm / Ra 92)	Item Number
	Power consumption : 3W	Number of LEDs : 12	Warm white	: WW : 3500K (189 lm / Ra 93)	LCEF-0150-W-DF-I LCEF-0150-WW-DF-I LCEF-0150-L30-DF-I LCEF-0150-L27-DF-I LCEF-0150-L24-DF-I
	Max. sets connectable : 5m		Warm white 3000K : L30 : 3000K	(184 lm / Ra 94)	
	Environment : Indoors (No Condensation)		Warm white 2700K : L27 : 2700K	(174 lm / Ra 93)	
	Accessories : Mounting clip (1 pcs)		Warm white 2400K : L24 : 2400K	(163 lm / Ra 93)	
	Option parts : Power supply cable 3000mm,				
	Lead wire cable 1000mm,				
	Mounting clip (2pcs/1bag),				
	Outer clip(2pcs/1bag),				
	Magnet set L, Magnet set A				

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.


Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727



Luci Creide F 300


Luci Pte. Ltd.

2018.06.08

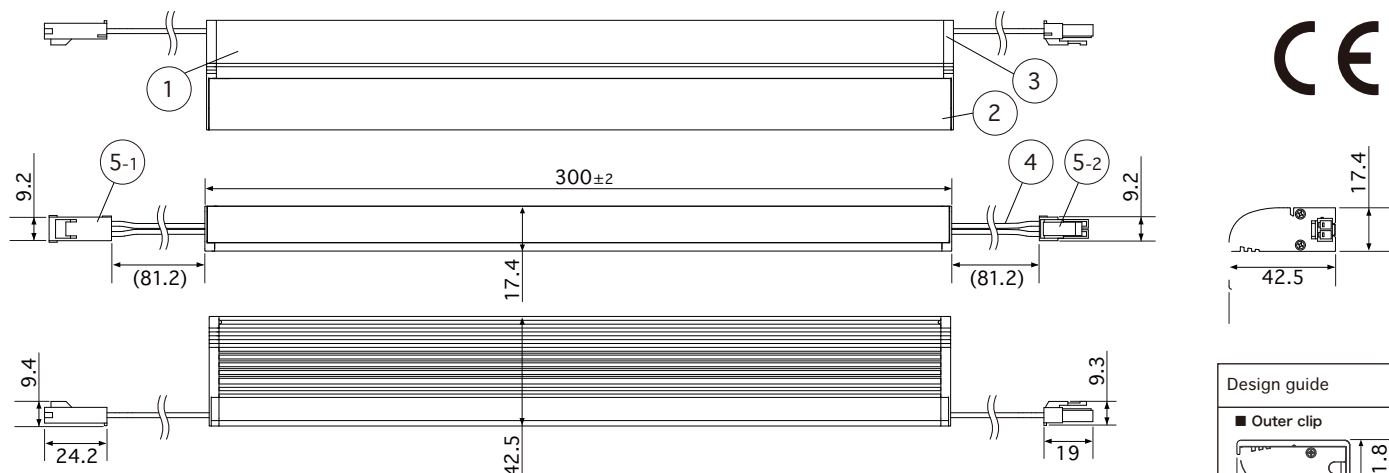


Design guide


- Outer clip




■ Magnet set L




■ Magnet set A




Accessories • Option parts :
Mounting clip for Creide (LCE-PTA) (2pcs/1bag)

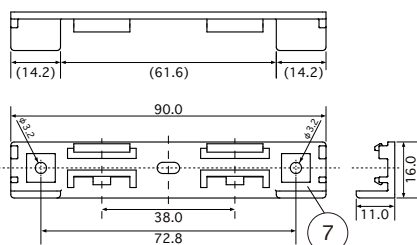

Option parts :
Outer clip for Creide(LCE-PT-B)(2pcs/1bag)




Option parts:
Power supply cable 3000mm (CAD-3000-MCRN-I)

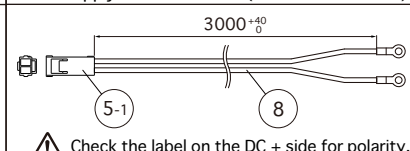


⚠ Check the label on the DC + side for polarity.


Option parts : Magnet set L (MG-L)
Magnet set A(MG-A)

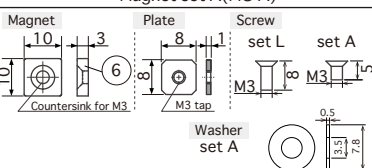

Option parts: 1000 mm of Lead wire cable with
SL connector (CAD-1000-MCFC-I)



The specifications and prices are subject to change without prior notice. Unit Of Measure : mm

	Part Name	Material	Note	Drawing 
1	Body	Aluminum	Alumite treatment, White painting	
2	Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead Wire		UL1007 AWG20	
5	Connector	Nylon	5-1:SLR-02VF(JST) White 5-2:SLP-02V(JST) White	
6	Magnet set	Neogium, Stainless steel	Silver	
7	Mounting clip	Polycarbonate	Clear	
8	Lead Wire		UL1007 AWG20	
9	Outer clip	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 133g	Light Source color : White	: W : 4000K (391 lm / Ra 92)	Item Number
Power consumption : 7W	Number of LEDs : 24		Warm white	: WW : 3500K (378 lm / Ra 93)	LCEF-0300-W-DF-I LCEF-0300-WW-DF-I LCEF-0300-L30-DF-I LCEF-0300-L27-DF-I LCEF-0300-L24-DF-I
Max. sets connectable : 5m			Warm white 3000K : L30 : 3000K (369 lm / Ra 94)		
Environment : Indoors (No Condensation)			Warm white 2700K : L27 : 2700K (349 lm / Ra 93)		
Accessories : Mounting clip (2pcs)			Warm white 2400K : L24 : 2400K (327 lm / Ra 93)		
Option parts : Power supply cable 3000mm,					
Lead wire cable 1000mm,					
Mounting clip (2pcs/1bag),					
Outer clip(2pcs/1bag),					
Magnet set L, Magnet set A					

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ | Hong Kong Marketing Office

Korea Office

Shanghai China mainland Regional HQ

Tel: +65-6291-2410

Tel: +852-2219-8462 / Fax: +852-2219-8461

Tel: +82-2-508-2541

Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727


Creide series

Luci Creide F 880


Luci Creide F 880

Luci Pte. Ltd.


2018.06.08

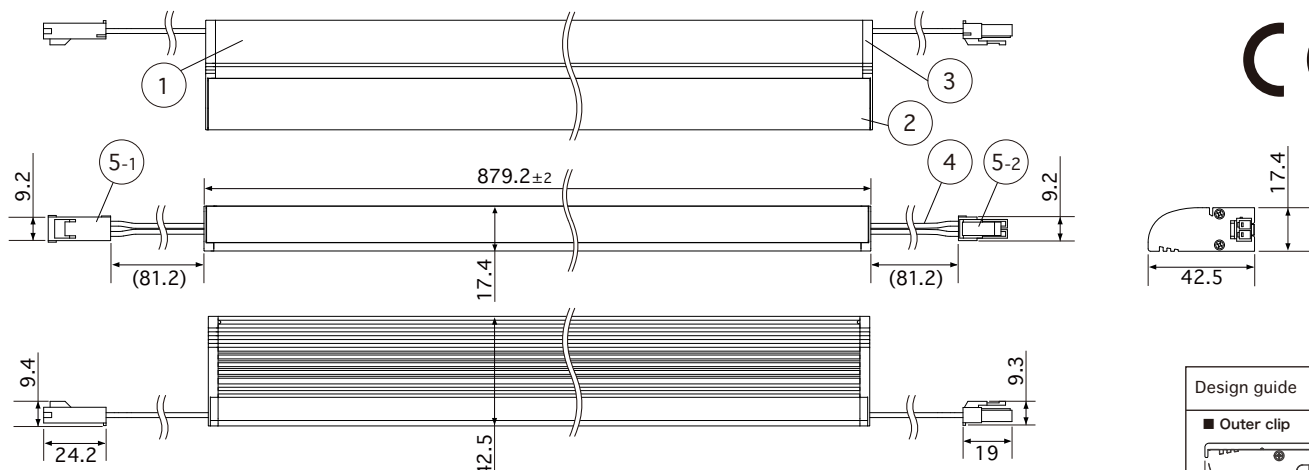


Accessories • Option parts :
Mounting clip for Creide (LCE-PTA) (2pcs/1bag)

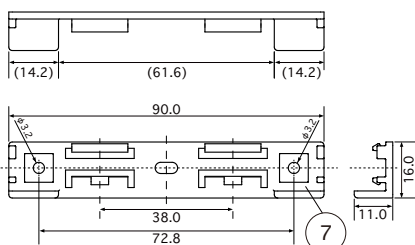


Option parts :
Outer clip for Creide(LCE-PT-B)(2pcs/1bag)





Option parts : Magnet set L (MG-L)
Magnet set A(MG-A)

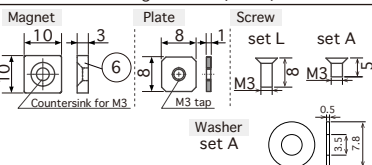

Option parts:
Power supply cable 3000mm (CAD-3000-MCRN-I)

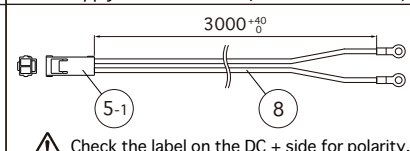

Option parts:1000 mm of Lead wire cable with
SL connector (CAD-1000-MCFC-I)

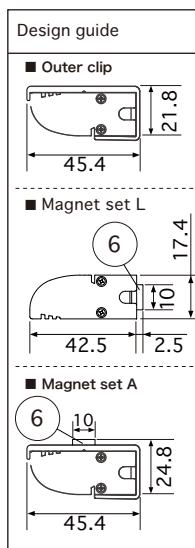

The specifications and prices are subject to change without prior notice. Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Aluminum	Alumite treatment, White painting	
2 Cover	Polycarbonate	Diffuser	
3 Side cover	Polycarbonate	Diffuser	
4 Lead Wire		UL1007 AWG20	
5 Connector	Nylon	5-1:SLR-02VF(JST) White 5-2:SLP-02V(JST) White	
6 Magnet set	Neogium, Stainless steel	Silver	
7 Mounting clip	Polycarbonate	Clear	
8 Lead Wire		UL1007 AWG20	
9 Outer clip	Polycarbonate	Clear	



Spec	Input voltage : DC24V	Weight : 365g	Light Source color : White	: W : 4000K (1174 lm / Ra 92)	Item Number
	Power consumption : 18.1W	Number of LEDs : 72	Warm white	: WW : 3500K (1135 lm / Ra 93)	LCEF-0880-W-DF-I LCEF-0880-WW-DF-I LCEF-0880-L30-DF-I LCEF-0880-L27-DF-I LCEF-0880-L24-DF-I
	Max. sets connectable : 5m		Warm white 3000K : L30 : 3000K (1108 lm / Ra 94)		
	Environment : Indoors (No Condensation)		Warm white 2700K : L27 : 2700K (1049 lm / Ra 93)		
	Accessories : Mounting clip (3pcs)		Warm white 2400K : L24 : 2400K (982 lm / Ra 93)		
	Option parts : Power supply cable 3000mm,				
	Lead wire cable 1000mm,				
	Mounting clip (2pcs/1bag),				
	Outer clip(2pcs/1bag),				
	Magnet set L, Magnet set A				

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)

Luci Pte. Ltd. http://www.luci.co.jp/ E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ Tel: +65-6291-2410	Hong Kong Marketing Office Tel: +852-2219-8462 / Fax: +852-2219-8461
Korea Office Tel: +82-2-508-2541	Shanghai China mainland Regional HQ Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727


Luci

2018.06.08

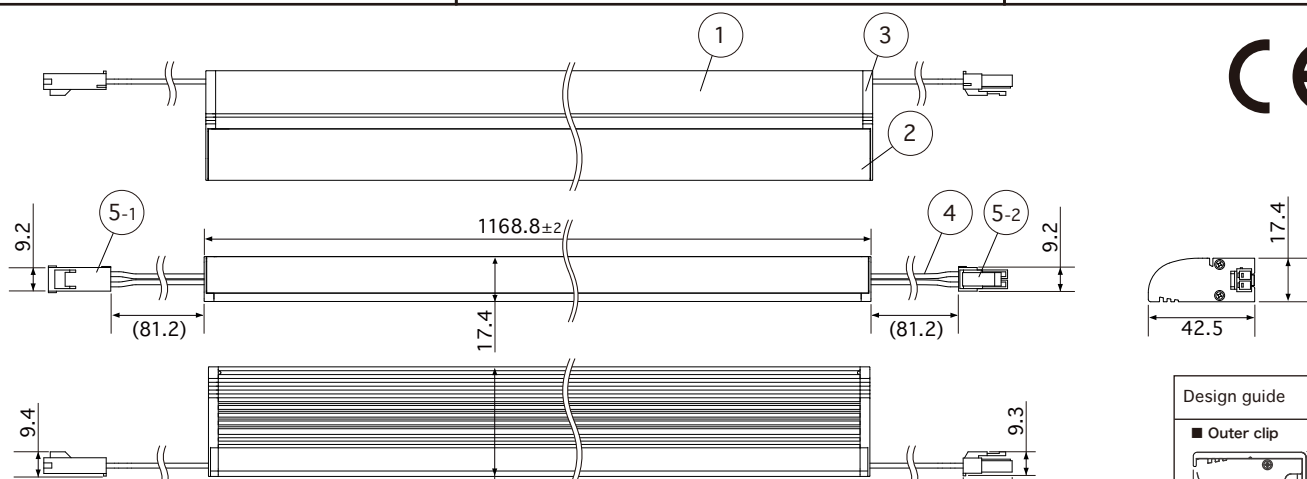

Technical drawing of a bracket assembly. The drawing includes the following components and dimensions:

- Magnet:** A circular component with a diameter of 10 and a thickness of 3. It features a central hole with a diameter of 6, labeled "Countersink for M3".
- Plate:** A rectangular component with a width of 8 and a thickness of 1. It has a central hole with a diameter of 6, labeled "M3 tap".
- Screw:** A screw with a diameter of 3 and a length of 5, labeled "set L". It is shown with a "set A" washer.
- Washer set A:** A circular washer with an outer diameter of 7.8 and an inner diameter of 3.5. It is shown with a thickness of 0.5.

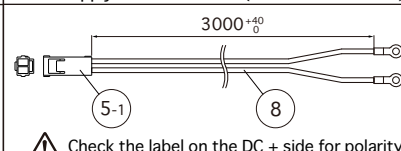

SL connector (CAD-1000-MCFC-I)

The diagram shows a long, thin rectangular component with a central section labeled '8'. The total length is indicated as 1000 ± 15 . The component is labeled 'SL connector (CAD-1000-MCFC-I)'.

■ Outer clip



15.4

21.8

■ Magnet set L

6

17.4

10

42.5

2.5

■ Magnet set A



Technical drawing of Magnet set A. It shows a rectangular magnet with a width of 45.4 and a height of 24.8. A dimension line indicates a distance of 10 from the top edge to the center of the magnet. A circled number 6 is shown next to the magnet.

The specifications and prices are subject to change without prior notice. Unit Of Measure : mm

LCEF-1170-W-DF-I
LCEF-1170-WW-DF-I
LCEF-1170-L30-DF-I
LCEF-1170-L27-DF-I
LCEF-1170-L24-DF-I

Qty.	Length(mm)
------	------------

Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727