


Luci

Luci Creide Lens 150

Luci Pte. Ltd.

2018.06.08

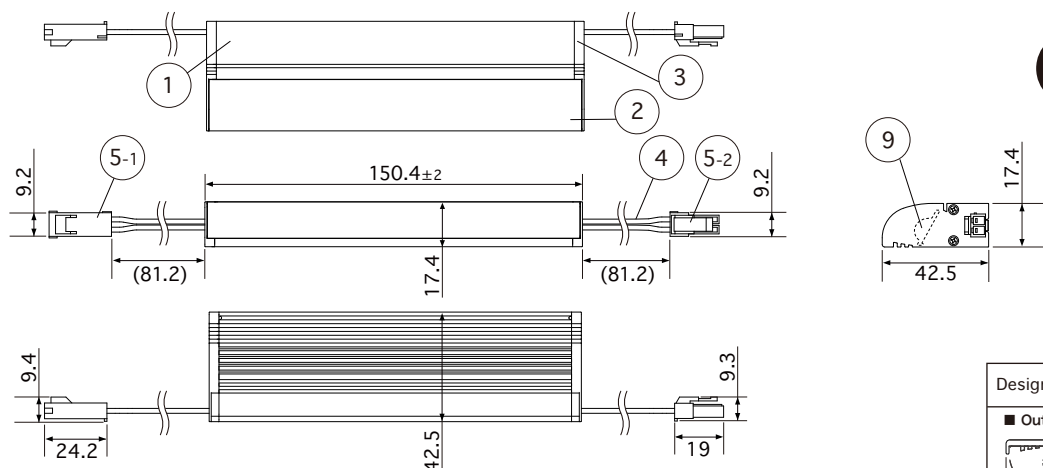

CE

Accessories • Option parts : Mounting clip for Creide (LCE-PTA) (2pcs/1bag)	Option parts : Outer clip for Creide(LCE-PT-B)(2pcs/1bag)	Option parts: Power supply cable 3000mm (CAD-3000-MCRN-I)
		⚠ Check the label on the DC + side for polarity
Option parts : Magnet set L (MG-L) Magnet set A(MG-A)		Option parts:1000 mm of Lead wire cable with SL connector (CAD-1000-MCFC-I)

Design guide

■ **Outer clip**



45.4

21.8

■ **Magnet set L**



6

17.4

10

42.5

2.5

■ **Magnet set A**




6


10

45.4

24.8

The specifications and prices are subject to change without prior notice. Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body	Aluminum	Alumite treatment, White painting	
2	Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead Wire		UL1007 AWG20	
5	Connector	Nylon	5-1:SLR-02VF(JST) White 5-2:SLP-02V(JST) White	
6	Magnet set	Neogium, Stainless steel	Silver	
7	Mounting clip	Polycarbonate	Clear	
8	Lead Wire		UL1007 AWG20	
9	Lens	Polycarbonate	Clear	
10	Outer clip	Polycarbonate	Clear	



Spec	Input voltage : DC24V	Weight : 79g	Light Source color : White	: W : 4000K (190 lm / Ra 92)
	Power consumption : 3W	Number of LEDs : 12	Warm white	: WW : 3500K (184 lm / Ra 93)
	Max. sets connectable : 5m	Environment : Indoors (No Condensation)	Warm white 3000K : L30 : 3000K	(178 lm / Ra 94)
	Accessories : Mounting clip (1 pcs)		Warm white 2700K : L27 : 2700K	(172 lm / Ra 93)
	Option parts : Power supply cable 3000mm,		Warm white 2400K : L24 : 2400K	(160 lm / Ra 93)
	Lead wire cable 1000mm,			
	Mounting clip(2pcs/1 bag),			
	Outer clip(2pcs/1 bag),			
	Magnet set L, Magnet set A			

LCEL-01 50-W-DF-I

LCEL-01 50-WW-DF-I

LCEL-01 50-L30-DF-I

LCEL-01 50-L27-DF-I

LCEL-01 50-L24-DF-I

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ	Hong Kong Marketing Office
--------------------	----------------------------

Korea Office

Shanghai China mainland Regional HQ

Tel: +65-6291-2410


Tel: +852-2219-8462 / Fax: +852-2219-8461

Tel: +82-2-508-2541




Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727







2018.05.25

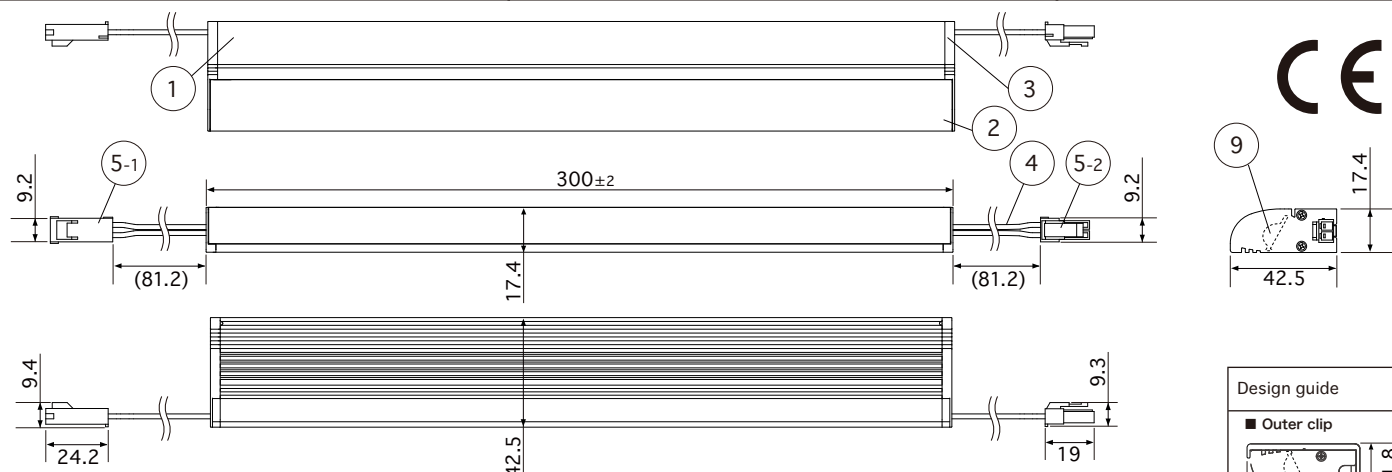


Option parts:
Power supply cable 3000mm (CAD-3000-MCRN-I)




Option parts:1 000 mm of Lead wire cable with

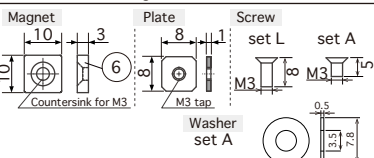

The specifications and prices are subject to change without prior notice. Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body	Aluminum	Alumite treatment, White painting	
2	Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead Wire		UL1007 AWG20	
5	Connector	Nylon	5-1:SLR-02VF(JST) White 5-2:SLP-02V(JST) White	
6	Magnet set	Neogium, Stainless steel	Silver	
7	Mounting clip	Polycarbonate	Clear	
8	Lead Wire		UL1007 AWG20	
9	Lens	Polycarbonate	Clear	
10	Outer clip	Polycarbonate	Clear	
				Item Number



Spec	Input voltage : DC24V	Weight : 151g	Light Source color : White	: W : 4000K (381 lm / Ra 92)
Power consumption : 6W	Number of LEDs : 24		Warm white	: WW : 3500K (369 lm / Ra 93)
Max. sets connectable : 5m	Environment : Indoors (No Condensation)		Warm white 3000K : L30 : 3000K	(357 lm / Ra 94)
Accessories : Mounting clip (2pcs)			Warm white 2700K : L27 : 2700K	(344 lm / Ra 93)
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K	(320 lm / Ra 93)
Lead wire cable 1000mm,				
Mounting clip (2pcs/1bag),				
Outer clip(2pcs/1bag),				
Magnet set L, Magnet set A				

LCEL-0300-W-DF-I

LCEL-0300-WW-DF-I

LCEL-0300-L30-DF-I

LCEL-0300-L27-DF-I

LCEL-0300-L24-DF-I

Area/Location/Circuit No.

Length(mm)

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Shanghai China mainland Regional HQ

Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

Luci



The specifications and prices are subject to change without prior notice. Unit Of Measure : mm




Luci Creide Lens 880

Luci Pte. Ltd.


2018.06.08

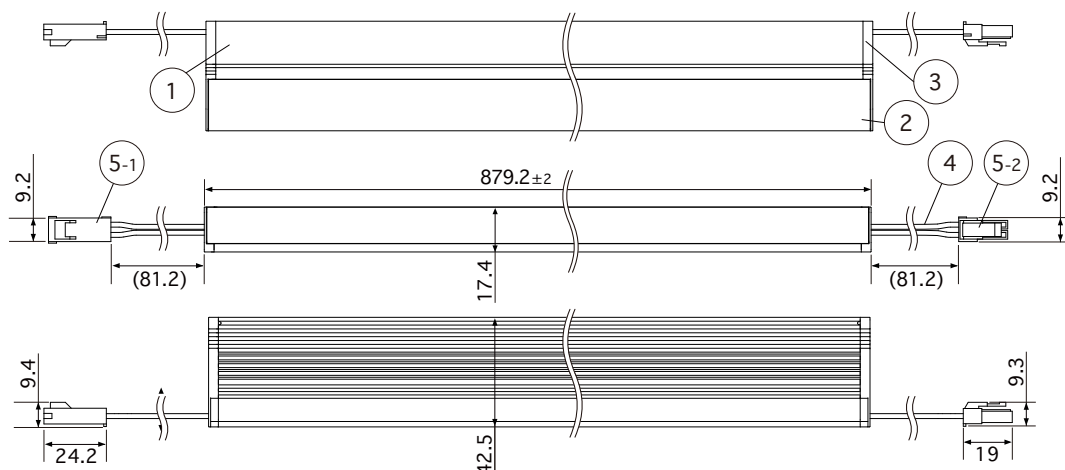


Accessories • Option parts :
Mounting clip for Creide (LCE-PTA) (2pcs/1 bag)

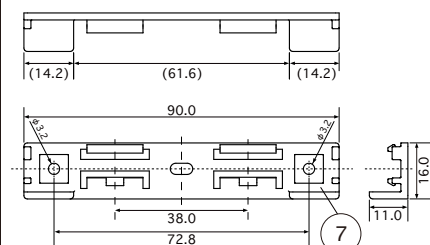


Option parts :
Outer clip for Creide(LCE-PT-B)(2pcs/1 bag)




Option parts:
Power supply cable 3000mm (CAD-3000-MCRN-I)

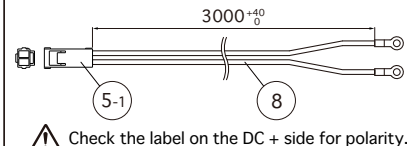

Option parts : Magnet set L (MG-L)
Magnet set A(MG-A)

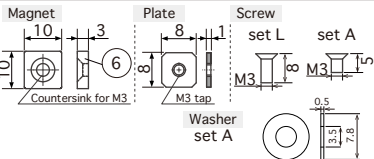

Option parts:1000 mm of Lead wire cable with SL connector (CAD-1000-MCFC-I)
--




Design guide


- Outer clip




■ Magnet set L



■ Magnet set A



The specifications and prices are subject to change without prior notice. Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body	Aluminum	Alumite treatment, White painting	
2	Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead Wire		UL1007 AWG20	
5	Connector	Nylon	5-1:SLR-02VF(JST) White 5-2:SLP-02V(JST) White	
6	Magnet set	Neogium, Stainless steel	Silver	
7	Mounting clip	Polycarbonate	Clear	
8	Lead Wire		UL1007 AWG20	
9	Lens	Polycarbonate	Clear	
10	Outer clip	Polycarbonate	Clear	
				Item Number

Spec	Input voltage : DC24V	Weight : 420g	Light Source color : White	: W : 4000K (1145 lm / Ra 92)	LCEL-0880-W-DF-I LCEL-0880-WW-DF-I LCEL-0880-L30-DF-I LCEL-0880-L27-DF-I LCEL-0880-L24-DF-I
	Power consumption : 18.1W	Number of LEDs : 72	Warm white	: WW : 3500K (1108 lm / Ra 93)	
	Max. sets connectable : 5m	Environment : Indoors (No Condensation)	Warm white 3000K : L30 : 3000K (1071 lm / Ra 94)		
	Accessories : Mounting clip (3pcs)		Warm white 2700K : L27 : 2700K (1034 lm / Ra 93)		
	Option parts : Power supply cable 3000mm,		Warm white 2400K : L24 : 2400K (960 lm / Ra 93)		
	Lead wire cable 1000mm,				
	Mounting clip (2pcs/1bag),				
	Outer clip(2pcs/1bag),				
	Magnet set L, Magnet set A				

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ Tel: +65-6291-2410	Hong Kong Marketing Office Tel: +852-2219-8462 / Fax: +852-2219-8463
--	---

Korea Office

Shanghai China mainland Regional HQ

Tel: +65-6291-2410

Tel: +852-2219-8462 / Fax: +852-2219-8461

Tel: +82-2-508-2541


Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727




Luci Creide Lens 1170

Luci Pte. Ltd.


2018.06.08

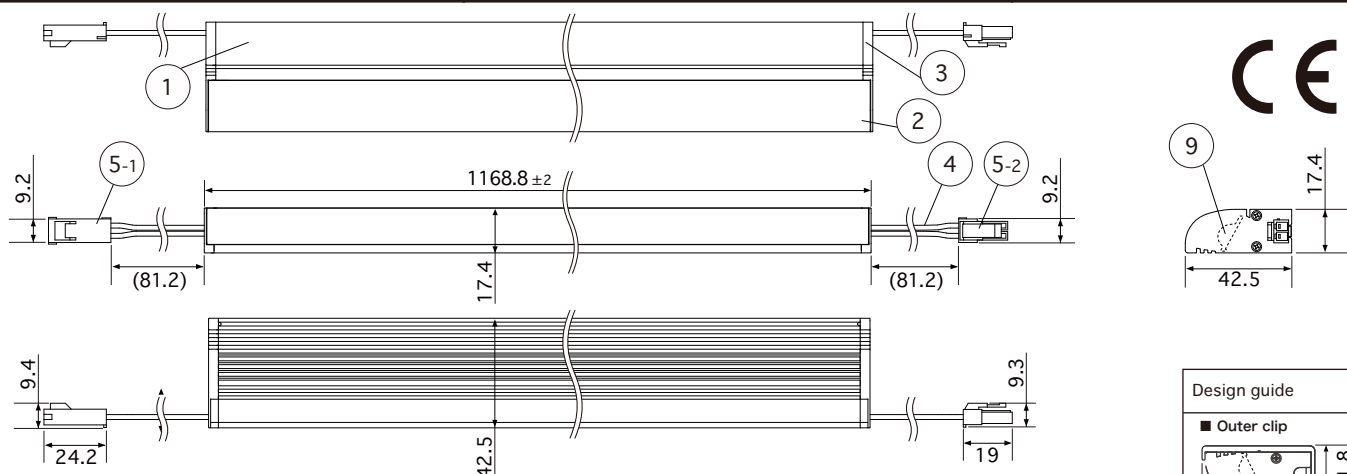


Accessories • Option parts :
Mounting clip for Creide (LCE-PTA) (2pcs/1bag)

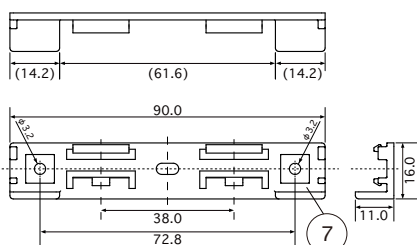

Option parts :
Outer clip for Creide(LCE-PT-B)(2pcs/1bag)




Option parts:
Power supply cable 3000mm (CAD-3000-MCRN-I)




 Check the label on the DC + side for polarity.

Option parts : Magnet set L (MG-L)
Magnet set A(MG-A)

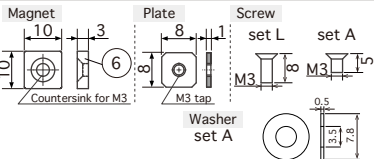


Option parts:1000 mm of Lead wire cable with SL connector (CAD-1000-MCFC-I)
--




Design guide


■ Outer clip




■ Magnet set L



■ Magnet set A



The specifications and prices are subject to change without prior notice. Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body	Aluminum	Alumite treatment, White painting	
2	Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead Wire		UL1007 AWG20	
5	Connector	Nylon	5-1:SLR-02VF(JST) White 5-2:SLP-02V(JST) White	
6	Magnet set	Neogium, Stainless steel	Silver	
7	Mounting clip	Polycarbonate	Clear	
8	Lead Wire		UL1007 AWG20	
9	Lens	Polycarbonate	Clear	
10	Outer clip	Polycarbonate	Clear	
				Item Number

Spec	Input voltage : DC24V	Weight : 558g	Light Source color : White	: W : 4000K (1527 lm / Ra 92)	LCEL-1170-W-DF-I LCEL-1170-WW-DF-I LCEL-1170-L30-DF-I LCEL-1170-L27-DF-I LCEL-1170-L24-DF-I
	Power consumption : 24.2W	Number of LEDs : 96	Warm white	: WW : 3500K (1477 lm / Ra 93)	
	Max. sets connectable : 5m	Environment : Indoors(No Condensation)	Warm white 3000K : L30 : 3000K (1428 lm / Ra 94)		
	Accessories : Mounting clip (3pcs)		Warm white 2700K : L27 : 2700K (1379 lm / Ra 93)		
	Option parts : Power supply cable 3000mm,		Warm white 2400K : L24 : 2400K (1280 lm / Ra 93)		
	Lead wire cable 1000mm,				
	Mounting clip (2pcs/1 bag),				
	Outer clip(2pcs/1 bag),				
	Magnet set L, Magnet set A				

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ Tel: +65-6291-2410	Hong Kong Marketing Office Tel: +852-2219-8462 / Fax: +852-2219-8463
--	---

Korea Office

Shanghai China mainland Regional HO

Tel: +65-6291-2410

Tel: +852-2219-8462 / Fax: +852-2219-8461

Tel: +82-2-508-2541


Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727



Luci Creide Lens 1460


Luci Pte. Ltd.

2018.06.08

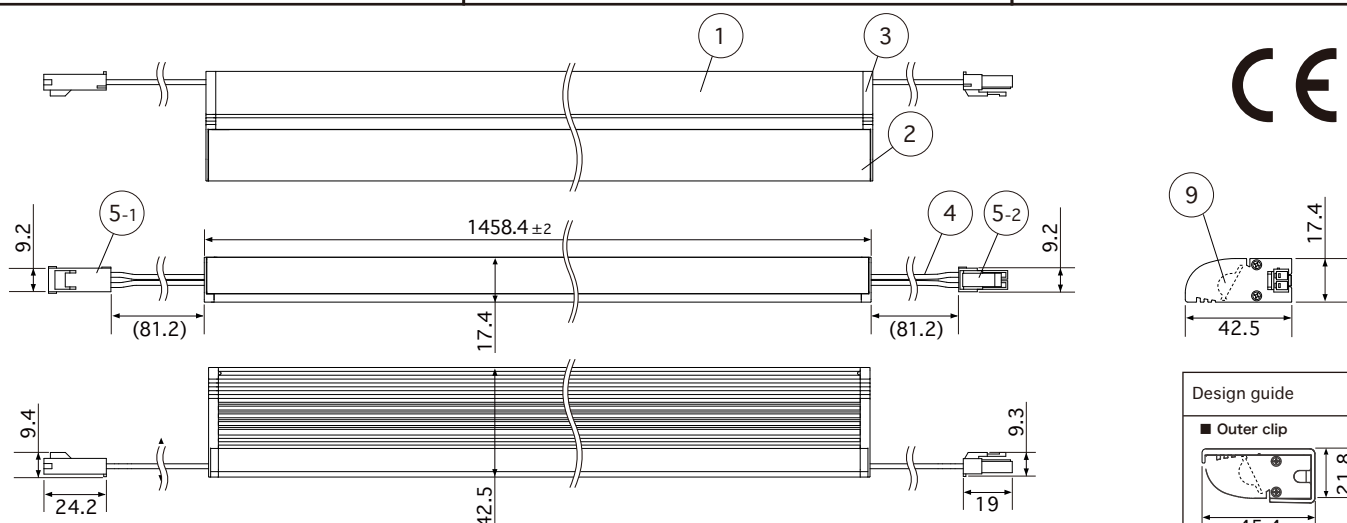


Design guide


- Outer clip




■ Magnet set L




■ Magnet set A




Accessories • Option parts :
Mounting clip for Creide (LCE-PTA) (2pcs/1bag)




Option parts :
Outer clip for Creide(LCE-PT-B)(2pcs/1 bag)



Option parts : Magnet set L (MG-L)
Magnet set A(MG-A)




Option parts:
Power supply cable 3000mm (CAD-3000-MCRN-I)




 Check the label on the DC + side for polarity.

Option parts:1000 mm of Lead wire cable with SL connector (CAD-1000-MCFC-I)
--



The specifications and prices are subject to change without prior notice. Unit Of Measure : mm

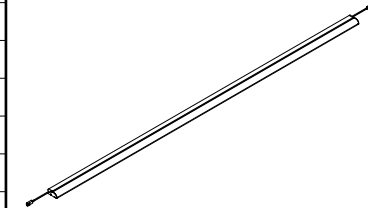	Part Name	Material	Note	Drawing
1	Body	Aluminum	Alumite treatment, White painting	
2	Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead Wire		UL1007 AWG20	
5	Connector	Nylon	5-1:SLR-02VF(JST) White 5-2:SLP-02V(JST) White	
6	Magnet set	Neogium, Stainless steel	Silver	
7	Mounting clip	Polycarbonate	Clear	
8	Lead Wire		UL1007 AWG20	
9	Lens	Polycarbonate	Clear	
10	Outer clip	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 712g	Light Source color : White	: W : 4000K (1908 lm / Ra 92)
	Power consumption : 30.2W	Number of LEDs : 120	Warm white	: WW : 3500K (1847 lm / Ra 93)
	Max. sets connectable : 5m	Environment : Indoors(No Condensation)	Warm white 3000K : L30 : 3000K (1785 lm / Ra 94)	
	Accessories : Mounting clip (4pcs)		Warm white 2700K : L27 : 2700K (1724 lm / Ra 93)	
	Option parts : Power supply cable 3000mm,		Warm white 2400K : L24 : 2400K (1600 lm / Ra 93)	
	Lead wire cable 1000mm,			
	Mounting clip (2pcs/1bag),			
	Outer clip(2pcs/1bag),			
	Magnet set L, Magnet set A			

LCEL-1460-W-DF-I

LCEL-1460-WW-DF-I

LCEL-1460-L30-DF-I

LCEL-1460-L27-DF-I

LCEL-1460-L24-DF-I

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ Tel: +65-6291-2410	Hong Kong Marketing Office Tel: +852-2219-8462 / Fax: +852-2219-8463
--	---

Korea Office
Tel: +82-2-508

Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727