


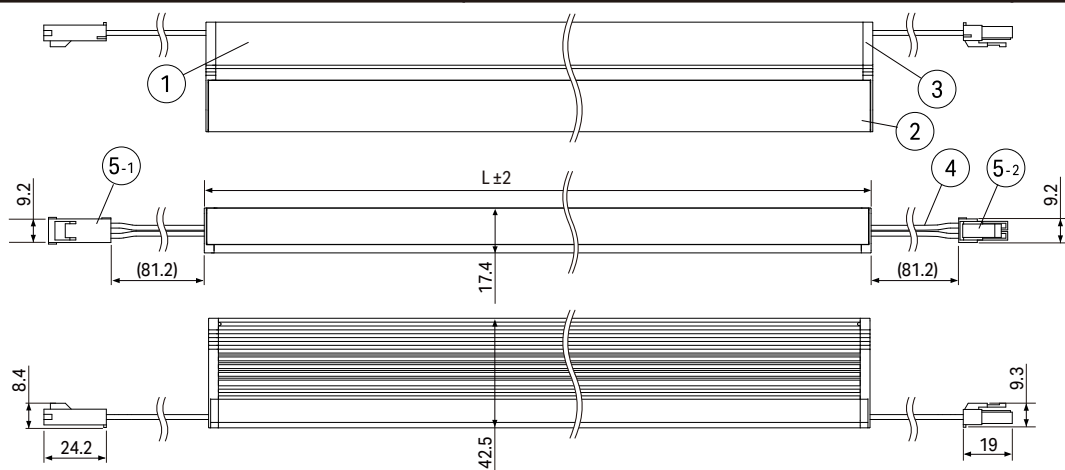





Attachment :
Mounting clip for Creide (LCE-PT-A)
1pc: 110, 210 2pcs: 310, 410, 510, 610, 710
3pcs: 810, 910, 1010, 1100 4pcs: 1210, 1310, 1410
Accessories:
Mounting clip for Creide (LCE-PT-A) (2pcs / 1bag)

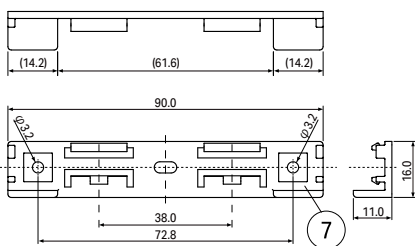


Accessories :
Outer clip for Creide(LCE-PT-B)(2pcs/1bag)




Accessories : Magnet set L (MG-L)
Magnet set A(MG-A)

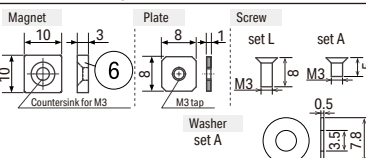

Accessories :
Power supply cable 3000mm for SL connector (CAD-3000-MCNN-I)

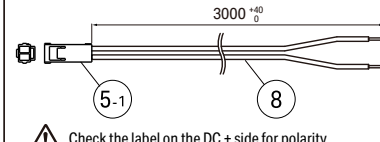


Accessories :
1000 mm of Lead wire cable with SL connector (CAD-1000-MCFC-I)

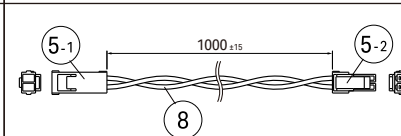


Design guide


■ Outer clip



■ Magnet set L




■ Magnet set A



The specifications and prices are subject to change without prior notice.

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body	Anodized aluminum	Alumite treatment, White painting	
2	Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead Wire		UL1007 AWG20	
5	Connector	Nylon	White UL94 V-2	
6	Magnet set	Neogium, Stainless steel	Silver	
7	Mounting clip	Polycarbonate	Clear	
8	Lead Wire		UL1007 AWG20	
9	Lens	Polycarbonate	Clear	
10	Outer clip	Polycarbonate	Clear	
				Model No.

Spec	Input voltage : DC24V	Weight : _ g (Refer to appendix)	Daylight white : D : 6500K	LCELY - <u>Length</u> - <u>Light source color</u> - DF - I - <u>Wattage</u>
	Wattage : _ W (Refer to appendix)		Natural white : N : 5000K	
	Max. length per circuit : 5m	Environment : Indoors 0~35℃ (No condensation)	White : W : 4000K	
	Attachments : Mounting clip		Warm white 3500K : WW : 3500K	
	(1pc:110m, 210 2pcs:310-710 3pcs:810-1110 4pcs:1210-1410)		Warm white 3000K : L30 : 3000K	
	Accessories : Power supply cable 3000mm,		Warm white 2700K : L27 : 2700K	
	Lead wire cable 1000mm,		Warm white 2500K : L25 : 2500K	
	Mounting clip(2pcs/1bag),Outer clip(2pcs/1bag),		Warm white 2200K : L22 : 2200K	
Magnet Set L(10 sets/1bag)		Warm white 2000K : L20 : 2000K		
Magnet Set A(5 sets/1bag)		Warm white 1800K : L18 : 1800K		

0110	D : 6500K	10 : 10.7 W/m
0210	N : 5000K	15 : 15.8 W/m
0310	W : 4000K	
0410	WW : 3500K	
0510	L30 : 3000K	
0610	L27 : 2700K	
0710	L25 : 2500K	
0810	L22 : 2200K	
0910	L20 : 2000K	
1010	L18 : 1800K	
1110		
1210		
1310		
1410		
1510		


Job/Project Name	Area/Location/Circuit No.	
Product Code	Qty.	Length(mm)

Specifications [LCELY]

LCELY - Length - Light source color - DF - I - Wattage

Specifications by length

Length	Fitting length (L)	Wattage		Weight
		10.7W/m	15.8W/m	
0110	110.6mm	1.1W	1.6W	45g
0210	210.6mm	2.1W	3.2W	90g
0310	310.6mm	3.2W	4.7W	135g
0410	410.6mm	4.3W	6.3W	175g
0510	510.6mm	5.4W	7.9W	215g
0610	610.6mm	6.4W	9.5W	255g
0710	710.6mm	7.5W	11.1W	295g
0810	810.6mm	8.6W	12.7W	335g
0910	910.6mm	9.7W	14.2W	375g
1010	1010.6mm	10.7W	15.8W	415g
1110	1110.6mm	11.8W	17.4W	455g
1210	1210.6mm	12.9W	19.0W	495g
1310	1310.6mm	14.0W	20.6W	535g
1410	1410.6mm	15.0W	22.1W	575g
1510	1510.6mm	16.1W	23.7W	625g



Photometry characterristic

Wattage 10 : 10.7W/m										
Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18
Luminous flux	1083lm/m	1074lm/m	1055lm/m	1045lm/m	1016lm/m	959lm/m	710lm/m	662lm/m	604lm/m	585lm/m
Luminaire efficiency	100.8lm/W	99.9lm/W	98.1lm/W	97.2lm/W	94.6lm/W	89.2lm/W	66.0lm/W	61.5lm/W	56.2lm/W	54.4lm/W

Wattage 15 : 15.8W/m										
Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18
Luminous flux	1566lm/m	1552lm/m	1524lm/m	1510lm/m	1469lm/m	1386lm/m	1025lm/m	956lm/m	873lm/m	845lm/m
Luminaire efficiency	99.0lm/W	98.1lm/W	96.4lm/W	95.5lm/W	92.9lm/W	87.6lm/W	64.8lm/W	60.4lm/W	55.2lm/W	53.4lm/W

Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18
CRI	Ra96	Ra93	Ra97	Ra97	Ra95	Ra94	Ra94	Ra93	Ra91	Ra90

The values are measured values, not guaranteed values.