

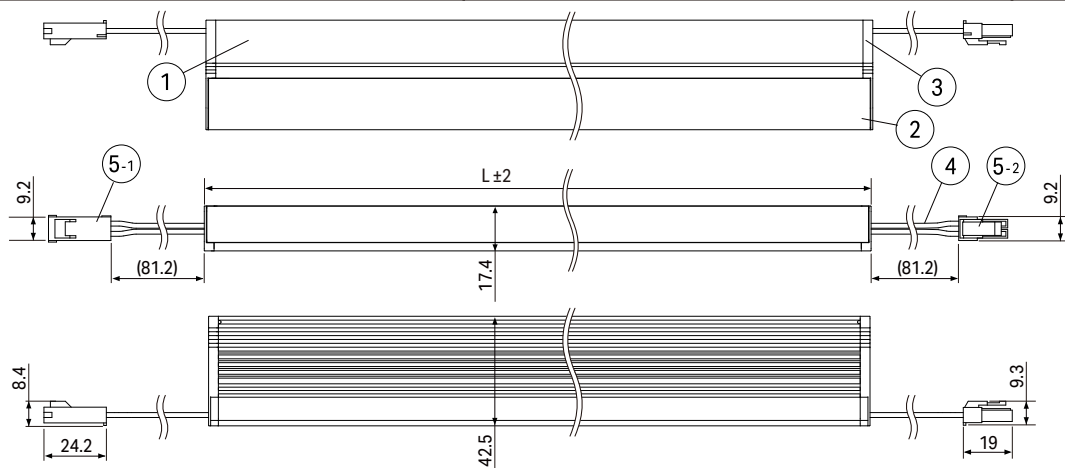


Design guide


■ Outer clip




■ Magnet set L




■ Magnet set A




Attachment :
Mounting clip for Creide (LCE-PT-A)
1pc: 110, 210 2pcs: 310, 410, 510, 610, 710
3pcs: 810, 910, 1010, 1100 4pcs: 1210, 1310, 1410
Accessories:
Mounting clip for Creide (LCE-PT-A) (2pcs / 1bag)




Accessories :
Outer clip for Creide(LCE-PT-B)(2pcs/1bag)



Accessories : Magnet set L (MG-L)
Magnet set A(MG-A)

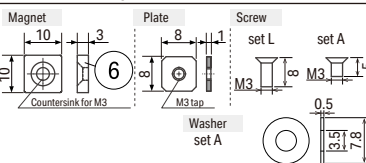


Accessories :
Power supply cable 3000mm for SL connector (CAD-3000-MCNN-I)




 Check the label on the DC + side for polarity.

Accessories :
1000 mm of Lead wire cable with SL connector (CAD-1000-MCFC-I)

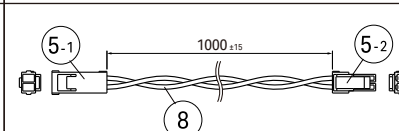

The specifications and prices are subject to change without prior notice.

Unit Of Measure : mm

	Part Name	Material	Note	Drawing 
1	Body	Anodized aluminum	Alumite treatment, White painting	
2	Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead Wire		UL1007 AWG20	
5	Connector	Nylon	白 UL94 V-2	
6	Magnet set	Neogium, Stainless steel	Silver	
7	Mounting clip	Polycarbonate	Clear	
8	Lead Wire		UL1007 AWG20	
9	Outer clip	Polycarbonate	Clear	
10				Model No.

Spec	Input voltage : DC24V	Weight : _g (Refer to appendix)	Daylight white : D : 6500K	LCEY -Length- Light source color- DF - I -Wattage
	Wattage : _ W (Refer to appendix)		0110 D : 6500K 10 : 10.7 W/m	
	Max. length per circuit : 5m	Environment : Indoors 0~35℃ (No condensation)	0210 N : 5000K 15 : 15.8 W/m	
	Attachments : Mounting clip (1pc:110m, 210 2pcs:310-710 3pcs:810-1110 4pcs:1210-1410)	White : W : 4000K	0310 W : 4000K	
	Accessories : Power supply cable 3000mm,	Warm white 3500K : WW : 3500K	0410 WW : 3500K	
	Lead wire cable 1000mm,	Warm white 3000K : L30 : 3000K	0510 L30 : 3000K	
	Mounting clip(2pcs/1bag), Outer clip(2pcs/1bag),	Warm white 2700K : L27 : 2700K	0610 L27 : 2700K	
	Magnet Set L(10 sets/1bag)	Warm white 2500K : L25 : 2500K	0710 L25 : 2500K	
	Magnet Set A(5 sets/1bag)	Warm white 2200K : L22 : 2200K	0810 L22 : 2200K	
		Warm white 2000K : L20 : 2000K	0910 L20 : 2000K	
		Warm white 1800K : L18 : 1800K	1010 L18 : 1800K	
			1110	
			1210	
			1310	
			1410	
			1510	

Job/Project Name	Area/Location/Circuit No.	
Product Code	Qty.	Length(mm)

Luci Pte. Ltd.

<http://www.luci.co.jp>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410

Hong Kong Marketing Office
Tel: +852-2219-8462

Korea Office
Tel: +82-2-508-2541


Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / E-mail: info@luci.co.jp

Specifications [LCEY]

LCEY - [Length] - [Light source color] - DF- I - [Wattage]

Specifications by length

[Length]	Fitting length (L)	[Wattage]		Weight
		10.7W/m	15.8W/m	
0110	110.6mm	1.1W	1.6W	45g
0210	210.6mm	2.1W	3.2W	90g
0310	310.6mm	3.2W	4.7W	135g
0410	410.6mm	4.3W	6.3W	175g
0510	510.6mm	5.4W	7.9W	215g
0610	610.6mm	6.4W	9.5W	255g
0710	710.6mm	7.5W	11.1W	295g
0810	810.6mm	8.6W	12.7W	335g
0910	910.6mm	9.7W	14.2W	375g
1010	1010.6mm	10.7W	15.8W	415g
1110	1110.6mm	11.8W	17.4W	455g
1210	1210.6mm	12.9W	19.0W	495g
1310	1310.6mm	14.0W	20.6W	535g
1410	1410.6mm	15.0W	22.1W	575g
1510	1510.6mm	16.1W	23.7W	625g



Photometry characterristic

Wattage 10 : 10.7W/m										
[Light source color]	D	N	W	WW	L30	L27	L25	L22	L20	L18
Luminous flux	1110lm/m	1100lm/m	1081lm/m	1071lm/m	1041lm/m	982lm/m	727lm/m	678lm/m	619lm/m	599lm/m
Luminaire efficiency	103.3lm/W	102.4lm/W	100.5lm/W	99.6lm/W	96.9lm/W	91.4lm/W	67.6lm/W	63.1lm/W	57.6lm/W	55.8lm/W

Wattage 15 : 15.8W/m										
[Light source color]	D	N	W	WW	L30	L27	L25	L22	L20	L18
Luminous flux	1600lm/m	1586lm/m	1557lm/m	1543lm/m	1501lm/m	1416lm/m	1048lm/m	977lm/m	892lm/m	864lm/m
Luminaire efficiency	101.1lm/W	100.2lm/W	98.5lm/W	97.6lm/W	94.9lm/W	89.5lm/W	66.2lm/W	61.8lm/W	56.4lm/W	54.6lm/W

[Light source color]	D	N	W	WW	L30	L27	L25	L22	L20	L18
CRI	Ra96	Ra93	Ra97	Ra97	Ra95	Ra94	Ra94	Ra93	Ra91	Ra90

The values are measured values, not guaranteed values.