



Luci RIMiT pendant

Indoor use only Instruction Manual

Luci Pte. Ltd. Singapore World HQ

52A Tanjong Pagar Road, Singapore 088473
TEL +65-6291-2410

Luci Co., Ltd. Tokyo Japan Regional HQ

Akasaka Bldg. 3F, 4-13-13, Akasaka, Minato-ku, Tokyo 107-0052, Japan
Tel: +81-3-6327-7409

- ! - Luci RIMiT (with RIMiT pendant) is a compact and refined product. Please carefully read the instruction manual provided with the fixture and follow the recommended guidelines for handling and installation to ensure safe and proper use.
- Do not modify or alter the mounting configuration of the wires or physical components of the fixture.
- The luminaire may exhibit slight distortion during or after installation, which is a normal condition and not a defect.


Product specification

Example : LRMMR-T1008S-*-DF-I-6(P)

front view




side view

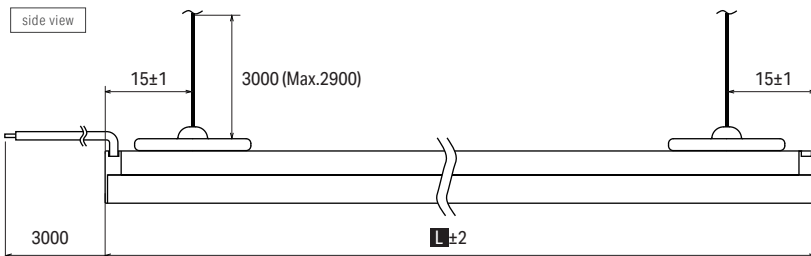

L : Custom order length (108 - 1008 mm)

side view




Input Voltage

DC24V


No.	Item name	Material etc.
①	Body	Aluminum, White
②	Cover	Polycarbonate, Diffuser
③	Side cover	ABS, White
④	Lead Wire	UL1007 AWG26
⑤	Wire	Stainless steel φ0.8, Silver
⑥	Lead and Wire clip for RIMiT	Polycarbonate, Clear
⑦	Hanging bracket	Brass, Steel, Stainless steel Nickel-plated, Chrome-plated, Silver

Example : LRMZE-T1009SS-*-DF-I-8(P)

front view




side view

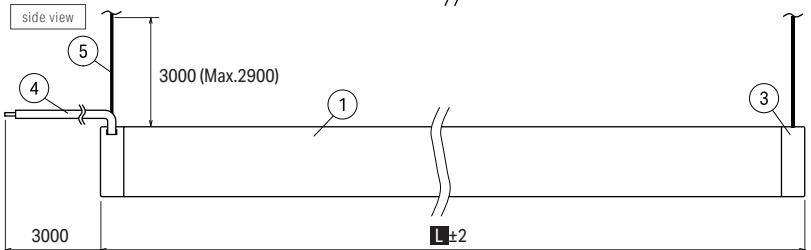

L : Custom order length (109 - 1009 mm)


side view



Accessories

Hanging bracket for RIMiT (LRM-PT-K) 1pc/1bag


Attachment, Accessories
Lead and Wire clip for RIMiT (LRM-PT-H) 5pcs/1bag

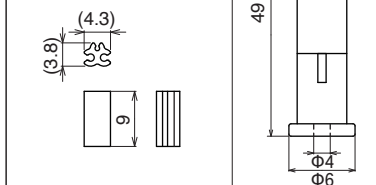

Specifications are subject to change without notice.

Installation dimensions (Side view)

RIMiT mr (Pendant)
+
Hanging bracket for RIMiT

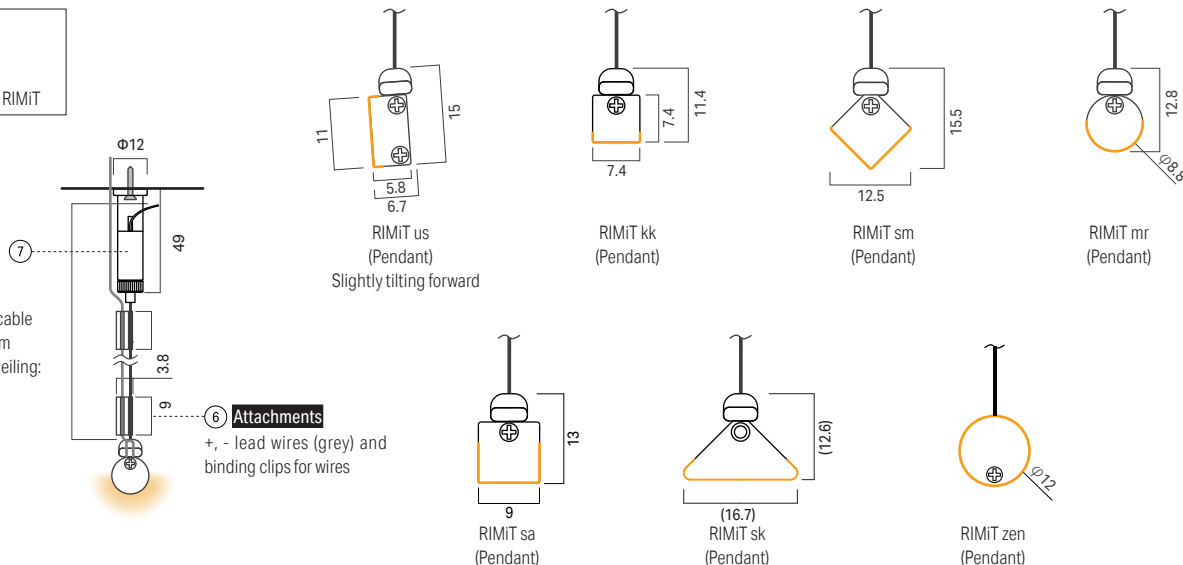

Wire/Power supply cable
Length : 3000mm
(Max distance from ceiling:
2900mm)

⑥ Attachments
+, - lead wires (grey) and
binding clips for wires



Luci RIMiT pendant

Indoor use only Instruction Manual

Luci Pte. Ltd. Singapore World HQ

13A Bukit Pasoh Road, Singapore 089827
TEL +65-6291-2410

Luci Co., Ltd. Tokyo Japan Regional HQ

Akasaka Bldg. 3F, 4-13-13, Akasaka, Minato-ku, Tokyo 107-0052, Japan
Tel: +81-3-6327-7409


Installing the product

Mounting with hanging bracket for RIMiT (LRM-PT-K)

(The pendant fittings are pre-set at 15mm from both ends of the lighting fixture).

*The wires are attached at $15\text{ mm} \pm 1\text{ mm}$ from both ends of the lighting fixture (RIMiT us / kk / sm / mr / sa / sk).


*The wires are mounted directly on both ends of the luminaire (RIMiT zen).

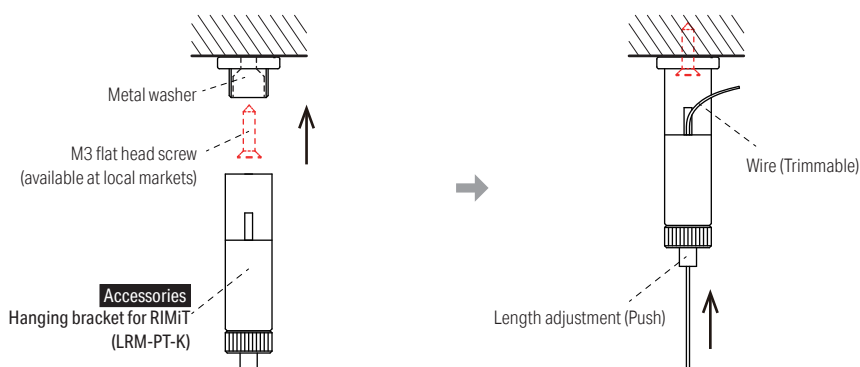

Attach the washers of the hanging bracket to the luminaire at both ends (2 points at each end) with screws (recommended: flat head screw M3 available at local markets). Secure the hanging bracket by rotating its body to lock it firmly in position.

Attach the luminaire by inserting the wires into the hanging bracket and adjust the installation height at both ends (2 points at each end). Cut off and dispose any excessive wires.

Installation for RIMiT lead and wire clips

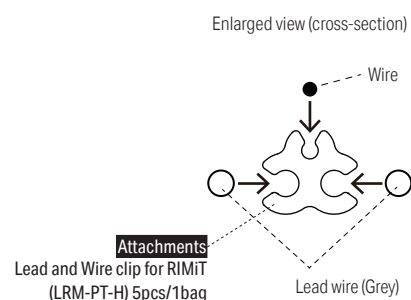

Attach the clip to the wire and insert the adjusted lead wire into the clip to bundle the wire and lead wire together.



Ensure suspension fittings are properly fastened to avoid luminaire from failing.

Ensure that the wire and hanging bracket are securely fastened to avoid luminaire from failing.