



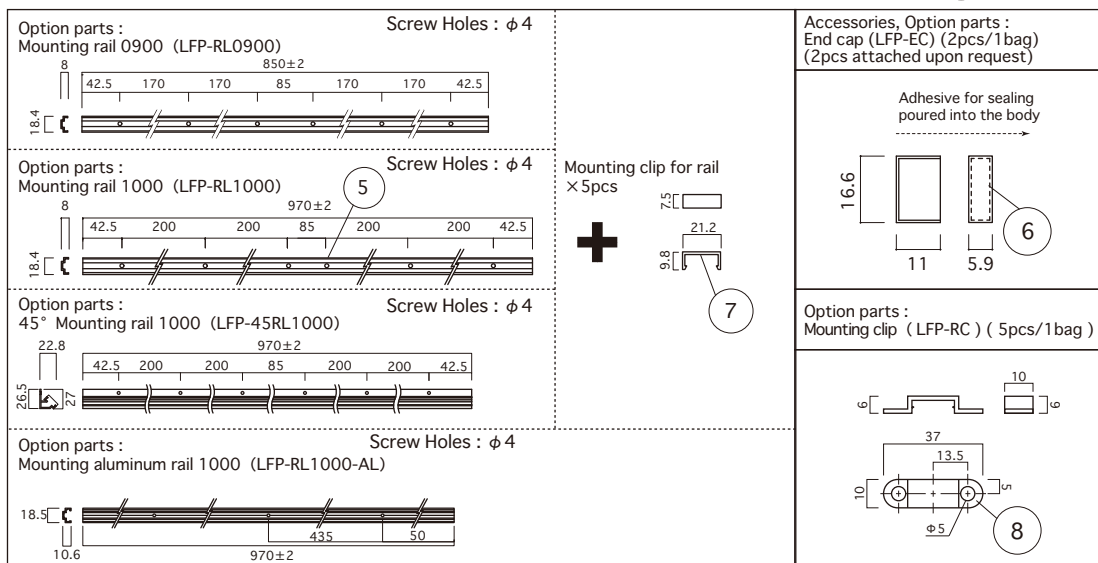

2022.07.19

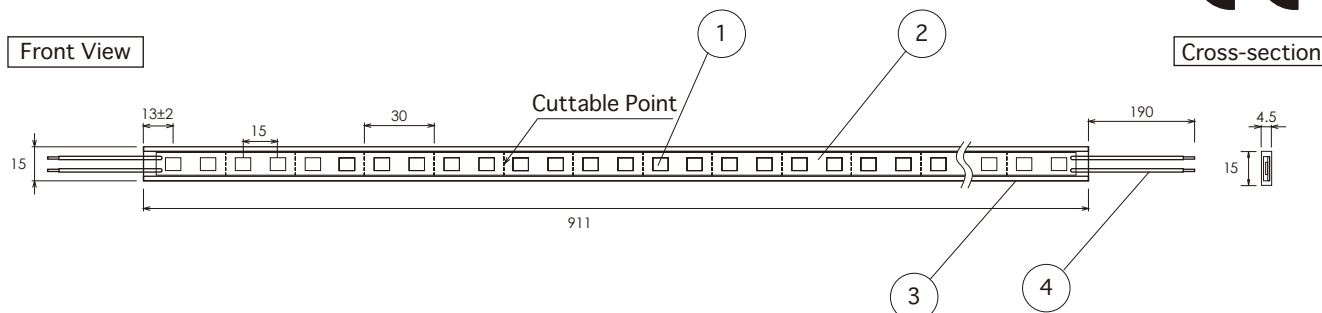

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	LED		SMD type	
2	Tape Substrate	FPC	White	
3	Body	Soft acrylic	Clear / Diffuser ※Custum order	
4	Lead Wire		UL1007 AWG22 Black + , White –	
5	Mounting rail	AES	White	
6	End cap	Polycarbonate	Clear	
7	Mounting clip for rail	Polycarbonate	Clear	
8	Mounting clip	Polycarbonate	Clear	
9				
10				

Spec		Light Source color : White	: W : 4200K (818 lm/ Ra 90)	Item Number
Input voltage : DC24V		Warm white 3500K : WW : 3500K (774 lm/ Ra 90)		LFP15-0900-W- CL or DF -I
Power consumption : 13.9W/900mm		Warm white 3000K : L30 : 3000K (710 lm/ Ra 90)		LFP15-0900-L30- CL or DF -I
Weight : -		Warm white 2700K : L27 : 2700K (711 lm/ Ra 90)		LFP15-0900-L27- CL or DF -I
Number of LEDs : 60		Warm white 2400K : L24 : 2400K (713 lm/ Ra 70)		LFP15-0900-L24- CL or DF -I
Max. sets connectable : 4.5m				
Min. allowable bend range : R50mm				
Environment : Indoors (No Condensation)				
Accessories : End cap×2pcs (※upon request)				
Option parts : Mounting rail, Mounting clip,				
Mounting clip for rail, End cap				
Certification :CE				
		*=Equivalent		

Job/Project Name	Area/Location/Circuit No.	
Product Code	Qty.	Length(mm)

Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

Tel: +65-6291-2410

Tel: +852-2219-8462 / Fax: +852-2219-8461

Tel: +82-2-508-2541

FLEX series


Luci Power FLEX

Luci Power FLEX 20mm pitch Indoor (40mm Cut Substrate) (C)




Luci Pte., Ltd.


2022.07.19

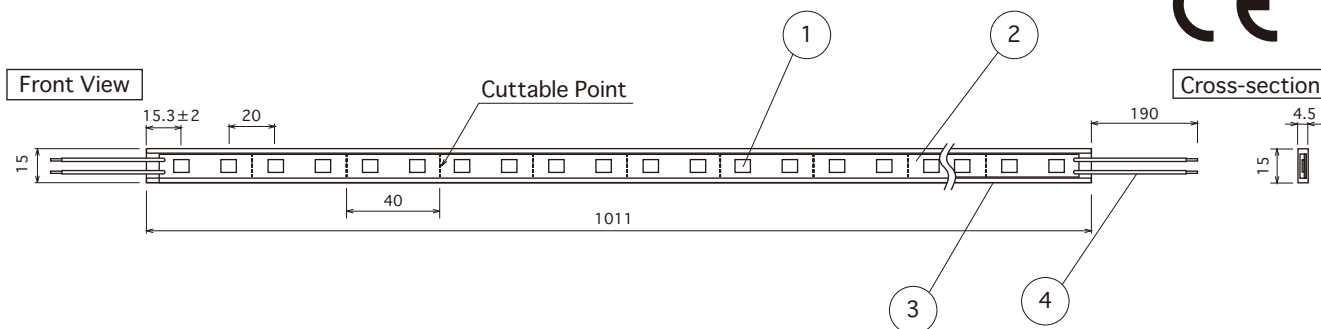


Option parts :
Mounting rail 1000 (LFP-RL1000)

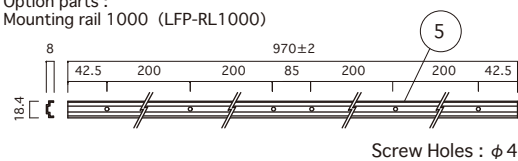


Option parts :
45° Mounting rail 1000 (LFP-45RL1000)



Option parts :
Mounting aluminum rail 1000 (LFP-RL1000-AL)




Mounting clip for rail
× 5pcs




Accessories, Option parts :
End cap (LFP-EC) (2pcs/1 bag)
(2pcs attached upon request)

Adhesive for sealing
poured into the body



Option parts :
Mounting clip (LFP-RC)
5pcs/1 bag



Spec · Rating may be subject to change without announcements

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	LED		SMD type	
2	Tape Substrate	FPC	White	
3	Body	Soft acrylic	Clear / Diffuser ※Custum order	
4	Lead Wire		UL1007 AWG22 Black+, White-	
5	Mounting rail	AES	White	
6	End cap	Polycarbonate	Clear	
7	Mounting clip for rail	Polycarbonate	Clear	
8	Mounting clip	Polycarbonate	Clear	
9				
10				

Spec	Input voltage : DC24V	Light Source color : White	W : 4200K (667 lm/ Ra 90)	Item Number
	Power consumption : 10.5W/m	Warm white 3500K : WW : 3500K (639 lm/ Ra 90)		LFP20-1000-W- CL or DF -I LFP20-1000-WW- CL or DF -I LFP20-1000-L30- CL or DF -I LFP20-1000-L27- CL or DF -I LFP20-1000-L24- CL or DF -I
	Weight : 60g	Warm white 3000K : L30 : 3000K (579 lm/ Ra 90)		
	Number of LEDs : 50	Warm white 2700K : L27 : 2700K (563 lm/ Ra 90)		
	Max. sets connectable : 5m	Warm white 2400K : L24 : 2400K (615 lm/ Ra 87)		
	Min. allowable bend range : R50mm			
	Environment : Indoors (No Condensation)			
	Accessories : End cap×2pcs (※upon request)			
	Option parts : Mounting rail, Mounting clip, Mounting clip for rail, End cap			
	Certification : CE			

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410

Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461

Korea Office
Tel: +82-2-508-2541

Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp