

FLEX series


Luci Power FLEX



Luci Power FLEX 15mm pitch IP65 (30mm Cut Substrate) (C)

Luci Pte., Ltd.

2022.07.13

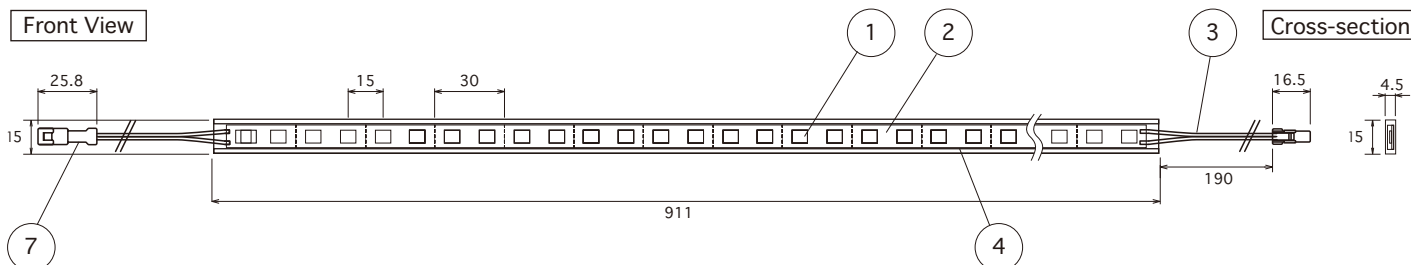

Option parts :
Mounting rail 0900 (LFP-RL0900)

Option parts :
Mounting rail 1000 (LFP-RL1000)

Option parts :
45° Mounting rail 1000 (LFP-45RL1000)

Option parts :
Mounting aluminum rail 1000 (LFP-RL1000-AL)

Option parts :
Mounting clip (LFP-RC)
5pcs/1bag

Option parts :
IP65 connector

Option parts :
Outdoor cable 3M TR connector (CAD-3000-MEFE-0)

Spec · Rating may be subject to change without announcements.

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	LED		SMD type	
2	Tape Substrate	FPC	White	
3	Lead Wire		UL1007 AWG22 Black+, White-	
4	Body	Soft acrylic	Clear / Diffuser ※Custum order	
5	Mounting rail	AES	White	
6	Mounting clip	Polycarbonate	Clear	
7	IP65 connector	Nylon	White , UL94V-0	
8	Mounting clip for rail	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Light Source color : White	W : 4200K (818 lm/ Ra 90)	Item Number
	Power consumption : 13.9W/900mm		Warm white 3500K : WW : 3500K (774 lm/ Ra 90)	LFP15-0900-W- CL or DF -O LFP15-0900-WW- CL or DF -O LFP15-0900-L30- CL or DF -O LFP15-0900-L27- CL or DF -O LFP15-0900-L24- CL or DF -O
	Weight : -g		Warm white 3000K : L30 : 3000K (710 lm/ Ra 90)	
	Number of LEDs : 60		Warm white 2700K : L27 : 2700K (711 lm/ Ra 90)	
	Max. sets connectable : 4.5m		Warm white 2400K : L24 : 2400K (713 lm/ Ra 87)	
	Min. allowable bend range : R50mm			
	Environment : In&Outdoors (No Condensation) IP65			
	Accessories : -			
	Option parts : Mounting rail, Mounting clip, Mounting clip for rail, End cap			
	Certification : CE		*=Equivalent	

Job/Project Name		Area/Location/Circuit No.	
Product Code		Qty. Length(mm)	
Luci Pte. Ltd. http://www.luci.co.jp E-mail: info@luci.co.jp		LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.	
Singapore World HQ	Hong Kong Marketing Office	Korea Office	Shanghai China mainland Regional HQ
Tel: +65-6291-2410	Tel: +852-2219-8462 / Fax: +852-2219-8461	Tel: +82-2-508-2541	Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

FLEX series


Luci Power FLEX

Luci Power FLEX 20mm pitch IP65 (40mm Cut Substrate) (C)




Luci Pte., Ltd.


2022.07.13

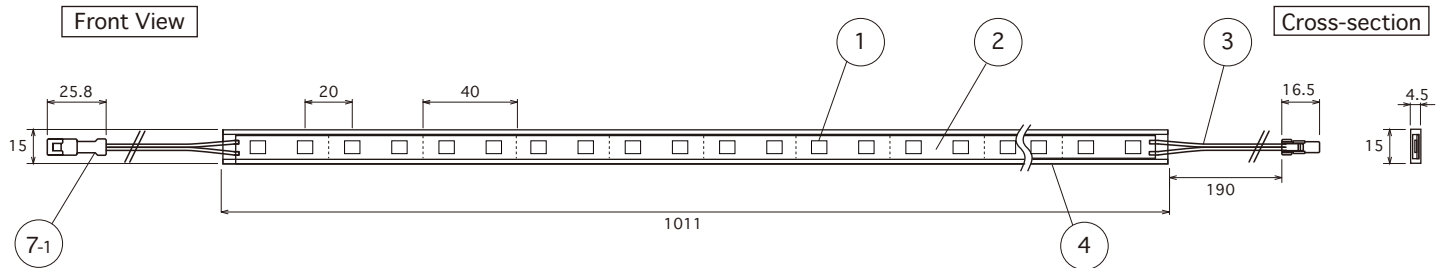


Option parts :
Mounting rail 1000 (LFP-RL1000)

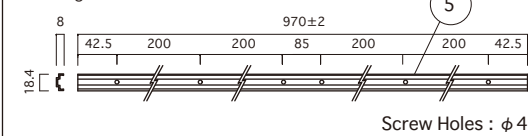


Option parts :
45° Mounting rail 1000 (LFP-45RL1000)

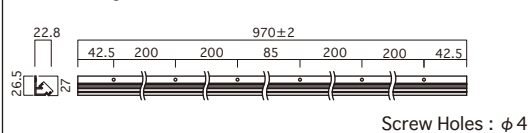


Option parts :
Mounting aluminum rail 1000 (LFP-RL1000-AL)

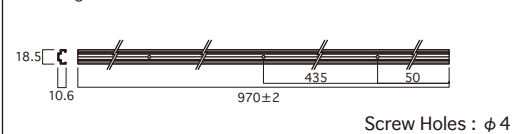


Mounting clip for rail
× 5pcs




Option parts :
Mounting clip (LFP-RC)
5pcs/1bag



IP65 connector



Option parts :
Outdoor cable 3M TR connector (CAD-3000-MEFE-O)

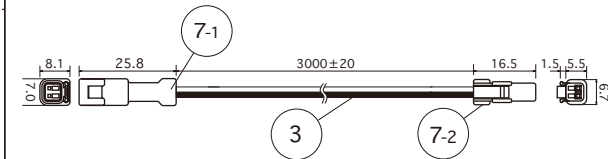

Spec · Rating may be subject to change without announcements.

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	LED		SMD type	
2	Tape Substrate	FPC	White	
3	Lead Wire		UL1007 AWG22 Black +, White -	
4	Body	Soft acrylic	Clear / Diffuser ※Custum order	
5	Mounting rail	AES	White	
6	Mounting clip	Polycarbonate	Clear	
7	IP65 connector	Nylon	White , UL94V-0	
8	Mounting clip for rail	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Light Source color : White	W : 4200K (667 lm/ Ra 90)	Item Number
	Power consumption : 10.5W		Warm white 3500K : WW : 3500K (639 lm/ Ra 90)	LFP20-1000-W- CL or DF -O LFP20-1000-WW- CL or DF -O LFP20-1000-L30- CL or DF -O LFP20-1000-L27- CL or DF -O LFP20-1000-L24- CL or DF -O
	Weight : 60g		Warm white 3000K : L30 : 3000K (579 lm/ Ra 90)	
	Number of LEDs : 50		Warm white 2700K : L27 : 2700K (563 lm/ Ra 90)	
	Max. sets connectable : 5m		Warm white 2400K : L24 : 2400K (615 lm/ Ra 87)	
	Min. allowable bend range : R50mm			
	Environment : In&Outdoors (No Condensation) IP65			
	Accessories : -			
	Option parts : Mounting rail, Mounting clip, Mounting clip for rail, End cap			
	Certification : CE			
			*=Equivalent	

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)

Luci Pte. Ltd. http://www.luci.co.jp E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ Hong Kong Marketing Office Korea Office	Shanghai China mainland Regional HQ
Tel: +65-6291-2410 Tel: +852-2219-8462 / Fax: +852-2219-8461 Tel: +82-2-508-2541	Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp