

FLEX series

Luci Power FLEX EX 15mm pitch






Luci Power FLEX EX 15mm pitch

Luci Pte., Ltd.

2022.08.29



MacAdam 3STEP(IF: 150mA, Ta: 25℃)

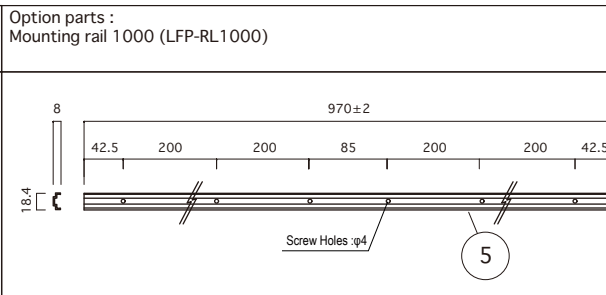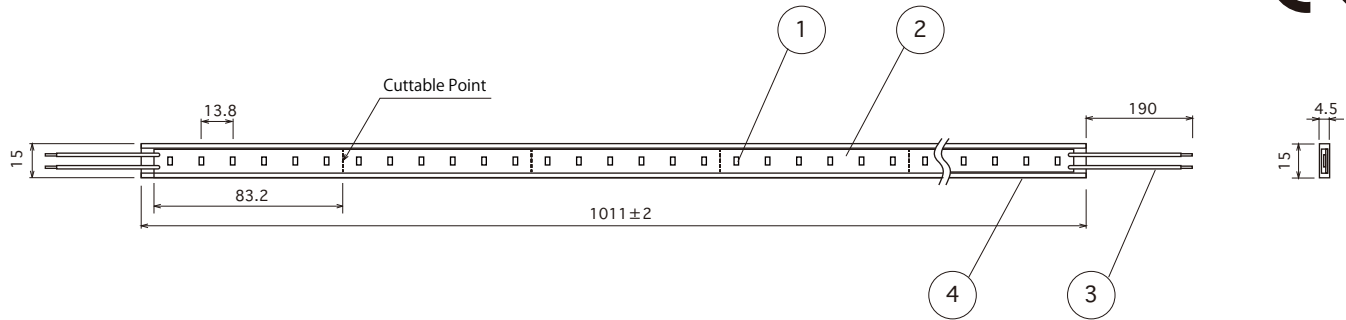

Unit Of Measure : mm

The specifications and prices are subject to change without prior notice.

	Part Name	Material	Note	Drawing
1	LED		SMD/Top view type	
2	Tape Substrate	FPC		
3	Lead Wire		UL1007 AWG22 Black+, White-	
4	Body	Soft acrylic	Clear	
5	Mounting rail	AES	White	
6	Mounting parts	Polycarbonate	Clear	
7	Mounting clip for rail	Polycarbonate	Clear	
8	End cap	Polycarbonate	Clear	
9				

Spec	Input voltage : DC24V	Light Source color : White	: W : 4200K(1622 lm*/Ra 93*)	Item Number
	Power consumption : 18.2W/m	Warm white 3500K : WW : 3500K(1407 lm*/Ra 93*)		LFPEX15-T1000W-W-CL-I LFPEX15-T1000W-WW-CL-I LFPEX15-T1000W-L30-CL-I LFPEX15-T1000W-L27-CL-I LFPEX15-T1000W-L24-CL-I LFPEX15-T1000W-L21-CL-I LFPEX15-T1000W-L19-CL-I
	Weight : 60g	Warm white 3000K : L30 : 3000K(1288 lm*/Ra 94*)		
	Number of LEDs : 72	Warm white 2700K : L27 : 2700K(1285 lm*/Ra 92*)		
	Max. sets connectable : 5m	Warm white 2400K : L24 : 2400K(1183 lm*/Ra 93*)		
	Min. bending range : R50mm	Warm white 2100K : L21 : 2100K(1100 lm*/Ra 96*)		
	Environment : Indoors (No Condensation)	Warm white 1900K : L19 : 1900K(1405 lm*/Ra 63*)		
	Accessories : End cap×2pcs (※upon request)			
	Option parts : End cap			
	Mounting clip , Mounting rail			

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)

FLEX series

Luci Power FLEX EX 20mm pitch


Luci Power FLEX EX 20mm pitch

Luci Pte., Ltd.


2022.07.19




MacAdam 3STEP(IF: 150mA, Ta: 25°C)

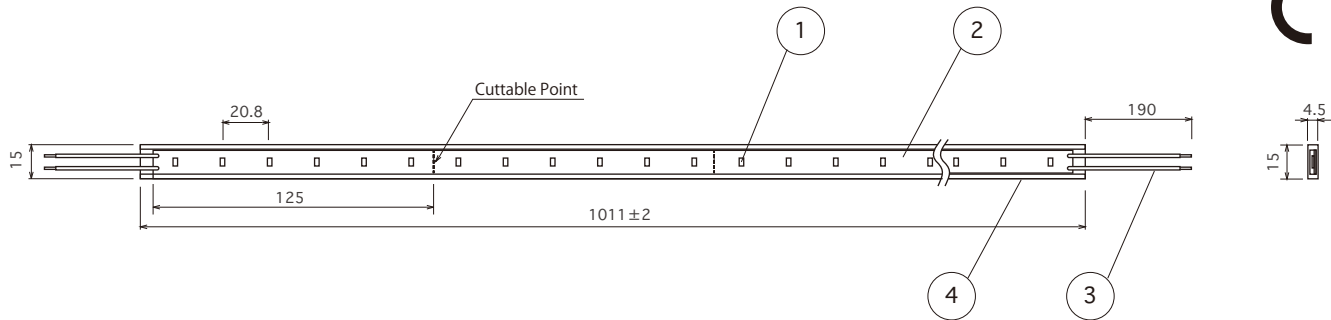


Accessories, Option parts :
End cap (LFP-EC) (2pcs/1 bag)
(2pcs attached upon request)




Option parts :
Mounting clip
(LFP-RC)(5pcs/1 bag)



Option parts :
Mounting rail 1000 (LFP-RL1000)

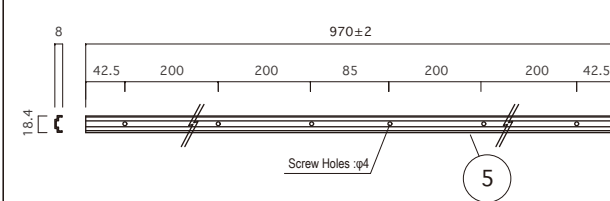

Accessories for rail :
Mounting clip for rail (LFP-PT)
(5pcs/1 bag)



Unit Of Measure : mm

The specifications and prices are subject to change without prior notice.

	Part Name	Material	Note	Drawing
1	LED		SMD/Top view type	
2	Tape Substrate	FPC		
3	Lead Wire		UL1007 AWG22 Black+,White-	
4	Body	Soft acrylic	Clear	
5	Mounting rail	AES	White	
6	Mounting parts	Polycarbonate	Clear	
7	Mounting clip for rail	Polycarbonate	Clear	
8	End cap	Polycarbonate	Clear	
9				

Spec	Input voltage : DC24V	Light Source color : White	: W : 4200K(1125 lm*/Ra 93*)	Item Number
	Power consumption : 12.1W/m		Warm white 3500K : WW : 3500K(1101 lm*/Ra 93*)	LFPEX20-T1000W-W-CL-I LFPEX20-T1000W-WW-CL-I LFPEX20-T1000W-L30-CL-I LFPEX20-T1000W-L27-CL-I LFPEX20-T1000W-L24-CL-I LFPEX20-T1000W-L21-CL-I LFPEX20-T1000W-L19-CL-I
	Weight : 60g		Warm white 3000K : L30 : 3000K(1008 lm*/Ra 94*)	
	Number of LEDs : 48		Warm white 2700K : L27 : 2700K(1016 lm*/Ra 92*)	
	Max. sets connectable : 5m		Warm white 2400K : L24 : 2400K(856 lm*/Ra 93*)	
	Min. bending range : R50mm		Warm white 2100K : L21 : 2100K(748 lm*/Ra 96*)	
	Environment : Indoors (No Condensation)		Warm white 1900K : L19 : 1900K(955 lm*/Ra 63*)	
	Accessories : End cap×2pcs (※upon request)			
	Option parts : End cap		*=Equivalent	
	Mounting clip , Mounting rail			

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)

Luci Pte. Ltd. http://www.luci.co.jp E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ Tel: +65-6291-2410	Shanghai China mainland Regional HQ Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp
Hong Kong Marketing Office Tel: +852-2219-8462 / Fax: +852-2219-8461	
Korea Office Tel: +82-2-508-2541	

FLEX series

Luci Power FLEX EX 30mm pitch


Luci Power FLEX EX 30mm pitch(4.5W/m)

Luci Pte., Ltd.


2022.07.19




MacAdam 3STEP(IF: 150mA, Ta: 25°C)

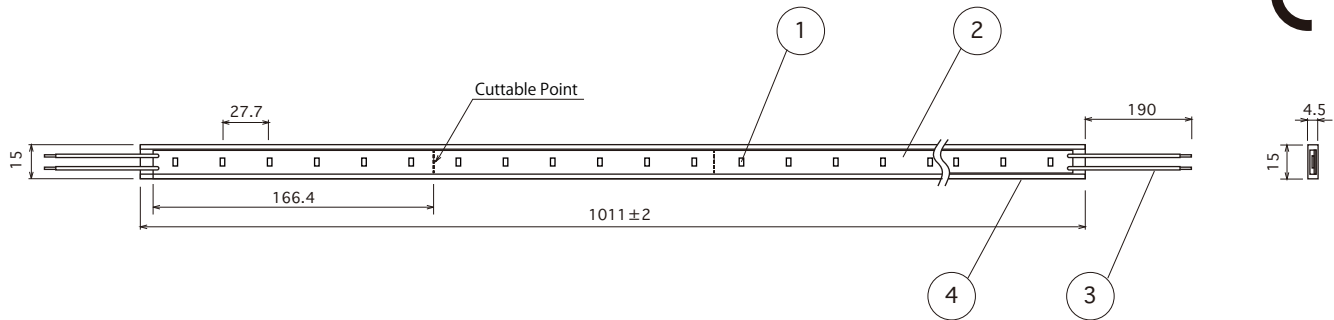


Accessories, Option parts :
End cap (LFP-EC) (2pcs/1 bag)
(2pcs attached upon request)




Option parts :
Mounting clip
(LFP-RC)(5pcs/1 bag)



Option parts :
Mounting rail 1000 (LFP-RL1000)

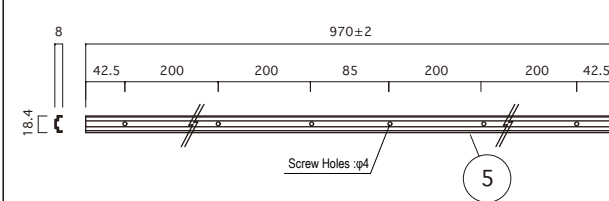

Accessories for rail :
Mounting clip for rail (LFP-PT)
(5pcs/1 bag)



Unit Of Measure : mm

The specifications and prices are subject to change without prior notice.

	Part Name	Material	Note	Drawing
1	LED		SMD/Top view type	
2	Tape Substrate	FPC		
3	Lead Wire		UL1007 AWG22 Black+,White-	
4	Body	Soft acrylic	Clear	
5	Mounting rail	AES	White	
6	Mounting parts	Polycarbonate	Clear	
7	Mounting clip for rail	Polycarbonate	Clear	
8	End cap	Polycarbonate	Clear	
9				

Spec	Input voltage : DC24V	Light Source color : White	: W : 4200K (388 lm*/Ra 93*)	Item Number
	Power consumption : 4.5W/m		Warm white 3500K : WW : 3500K (337 lm*/Ra 93*)	LFPEX30-T1000W-W-CL-I-4 LFPEX30-T1000W-WW-CL-I-4 LFPEX30-T1000W-L30-CL-I-4 LFPEX30-T1000W-L27-CL-I-4 LFPEX30-T1000W-L24-CL-I-4 LFPEX30-T1000W-L21-CL-I-4 LFPEX30-T1000W-L19-CL-I-4
	Weight : 60g		Warm white 3000K : L30 : 3000K (308 lm*/Ra 94*)	
	Number of LEDs : 36		Warm white 2700K : L27 : 2700K (307 lm*/Ra 92*)	
	Max. sets connectable : 5m		Warm white 2400K : L24 : 2400K (283 lm*/Ra 93*)	
	Min. bending range : R50mm		Warm white 2100K : L21 : 2100K (263 lm*/Ra 96*)	
	Environment : Indoors (No Condensation)		Warm white 1900K : L19 : 1900K (336 lm*/Ra 63*)	
	Accessories : End cap×2pcs (※upon request)			
	Option parts : End cap		*=Equivalent	
	Mounting clip , Mounting rail			

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)
Luci Pte. Ltd. http://www.luci.co.jp E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ Tel: +65-6291-2410	Hong Kong Marketing Office Tel: +852-2219-8462 / Fax: +852-2219-8461
Korea Office Tel: +82-2-508-2541	Shanghai China mainland Regional HQ Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

FLEX series

Luci Power FLEX EX 30mm pitch


Luci Power FLEX EX 30mm pitch(6.5W/m)

Luci Pte., Ltd.


2022.07.19




MacAdam 3STEP(IF: 150mA, Ta: 25°C)

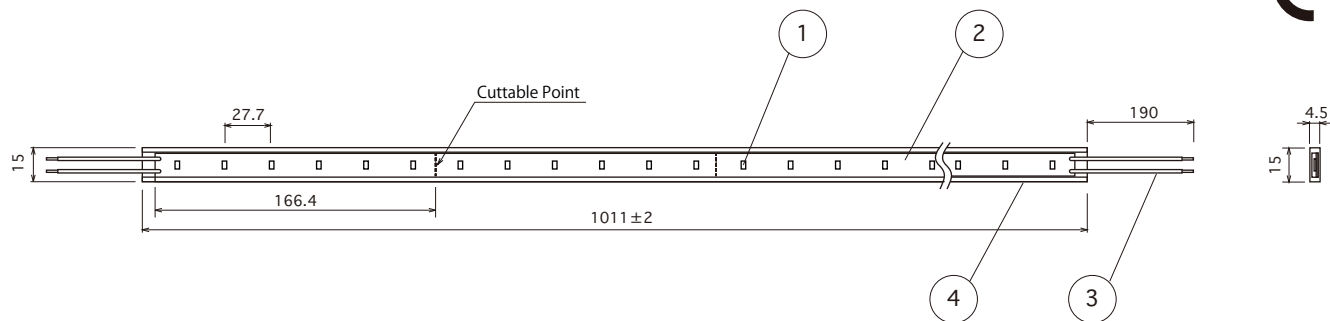


Accessories, Option parts :
End cap (LFP-EC) (2pcs/1bag)
(2pcs attached upon request)




Option parts :
Mounting clip
(LFP-RC)(5pcs/1bag)



Option parts :
Mounting rail 1000 (LFP-RL1000)

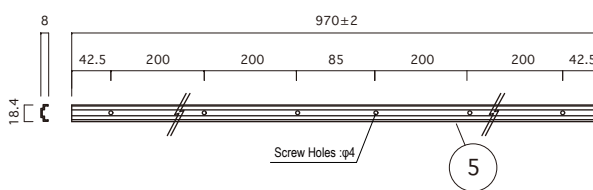

Accessories for rail :
Mounting clip for rail (LFP-PT)
(5pcs/1bag)



Unit Of Measure : mm

The specifications and prices are subject to change without prior notice.

	Part Name	Material	Note	Drawing
1	LED		SMD/Top view type	
2	Tape Substrate	FPC		
3	Lead Wire		UL1007 AWG22 Black+,White-	
4	Body	Soft acrylic	Clear	
5	Mounting rail	AES	White	
6	Mounting parts	Polycarbonate	Clear	
7	Mounting clip for rail	Polycarbonate	Clear	
8	End cap	Polycarbonate	Clear	
9				

Spec	Input voltage : DC24V	Light Source color : White	: W : 4200K(514 lm*/Ra 93*)	Item Number
	Power consumption : 6.5W/m		Warm white 3500K : WW : 3500K(446 lm*/Ra 93*)	LFPEX30-T1000W-W-CL-I-6 LFPEX30-T1000W-WW-CL-I-6 LFPEX30-T1000W-L30-CL-I-6 LFPEX30-T1000W-L27-CL-I-6 LFPEX30-T1000W-L24-CL-I-6 LFPEX30-T1000W-L21-CL-I-6 LFPEX30-T1000W-L19-CL-I-6
	Weight : 60g		Warm white 3000K : L30 : 3000K(408 lm*/Ra 94*)	
	Number of LEDs : 36		Warm white 2700K : L27 : 2700K(407 lm*/Ra 92*)	
	Max. sets connectable : 5m		Warm white 2400K : L24 : 2400K(375 lm*/Ra 93*)	
	Min. bending range : R50mm		Warm white 2100K : L21 : 2100K(348 lm*/Ra 96*)	
	Environment : Indoors (No Condensation)		Warm white 1900K : L19 : 1900K(445 lm*/Ra 63*)	
	Accessories : End cap×2pcs (※upon request)			
	Option parts : End cap		*=Equivalent	
	Mounting clip , Mounting rail			

Job/Project Name		Area/Location/Circuit No.	
Product Code		Qty.	Length(mm)
Luci Pte. Ltd. http://www.luci.co.jp		E-mail: info@luci.co.jp	
Singapore World HQ Tel: +65-6291-2410		Hong Kong Marketing Office Tel: +852-2219-8462 / Fax: +852-2219-8461	Korea Office Tel: +82-2-508-2541
LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.			
Shanghai China mainland Regional HQ Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp			

FLEX series

Luci Power FLEX EX 30mm pitch


Luci Power FLEX EX 30mm pitch(9.5W/m)

Luci Pte., Ltd.


2022.07.19




MacAdam 3STEP(IF: 150mA, Ta: 25°C)

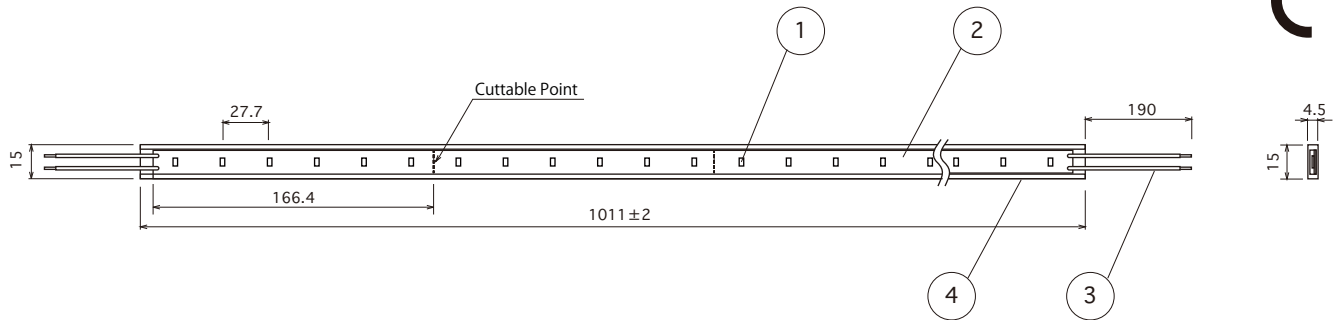


Accessories, Option parts :
End cap (LFP-EC) (2pcs/1bag)
(2pcs attached upon request)




Option parts :
Mounting clip
(LFP-RC)(5pcs/1bag)



Option parts :
Mounting rail 1000 (LFP-RL1000)

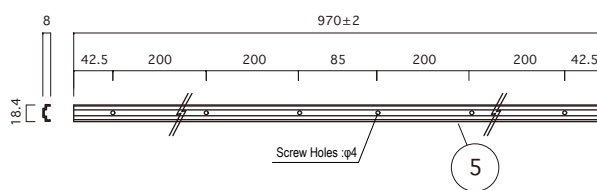

Accessories for rail :
Mounting clip for rail (LFP-PT)
(5pcs/1bag)



Unit Of Measure : mm

The specifications and prices are subject to change without prior notice.

	Part Name	Material	Note	Drawing
1	LED		SMD/Top view type	
2	Tape Substrate	FPC		
3	Lead Wire		UL1007 AWG22 Black+,White-	
4	Body	Soft acrylic	Clear	
5	Mounting rail	AES	White	
6	Mounting parts	Polycarbonate	Clear	
7	Mounting clip for rail	Polycarbonate	Clear	
8	End cap	Polycarbonate	Clear	
9				

Spec	Input voltage : DC24V	Light Source color : White	: W : 4200K(812 lm*/Ra 93*)	Item Number
	Power consumption : 9.5W/m		Warm white 3500K : WW : 3500K(704 lm*/Ra 93*)	LFPEX30-T1000W-W-CL-I-9 LFPEX30-T1000W-WW-CL-I-9 LFPEX30-T1000W-L30-CL-I-9 LFPEX30-T1000W-L27-CL-I-9 LFPEX30-T1000W-L24-CL-I-9 LFPEX30-T1000W-L21-CL-I-9 LFPEX30-T1000W-L19-CL-I-9
	Weight : 60g		Warm white 3000K : L30 : 3000K(644 lm*/Ra 94*)	
	Number of LEDs : 36		Warm white 2700K : L27 : 2700K(643 lm*/Ra 92*)	
	Max. sets connectable : 5m		Warm white 2400K : L24 : 2400K(592 lm*/Ra 93*)	
	Min. bending range : R50mm		Warm white 2100K : L21 : 2100K(550 lm*/Ra 96*)	
	Environment : Indoors (No Condensation)		Warm white 1900K : L19 : 1900K(703 lm*/Ra 63*)	
	Accessories : End cap×2pcs (※upon request)			
	Option parts : End cap		*=Equivalent	
	Mounting clip , Mounting rail			

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)
Luci Pte. Ltd. http://www.luci.co.jp E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ Tel: +65-6291-2410	Hong Kong Marketing Office Tel: +852-2219-8462 / Fax: +852-2219-8461
Korea Office Tel: +82-2-508-2541	Shanghai China mainland Regional HQ Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp