

UQ series

Luci UQ FLEX IP67

Luci UQ FLEX IP67(15.8W/m or 12.6W/m or 8.4W/m, Both ends lead wire-Side feed)





Luci Pte., Ltd.


2022.08.16

W: Both ends lead, R: Side (Right) feed

LIGHT SURFACE

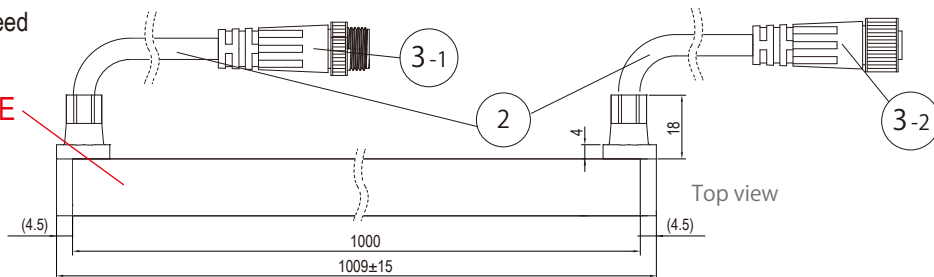


Top view



Left side view




Front view




Right side view


Option parts :
SUS Mounting clip for UQ FLEX (LFU-RC-B) (5pcs/1bag)




Option parts :
Power supply cable 10M for UQ FLEX (CAD-V010M-FPN-O)

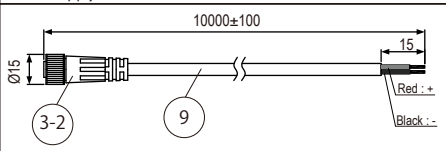


Option parts :
Joint cable 1M for UQ FLEX (CAD-1000-MPFP-O)

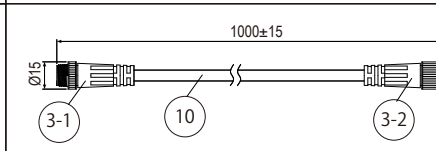


Option parts :
Aluminum mounting rail 950 set for UQ FLEX (LFU-RL0950-AL-C)

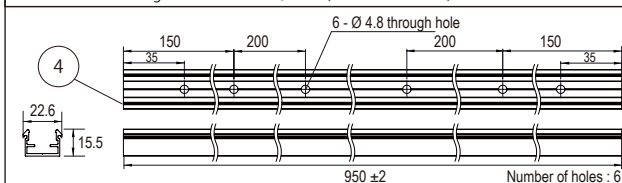


Accessories for rail & Option parts :
SUS hold Clip for UQ FLEX AL rail (LFU-PT-C)(5pcs/ 1bag)




Accessories for rail & Option parts :
Joint plate for UQ FLEX AL rail (LFU-PT-E)(1pc/ 1bag)

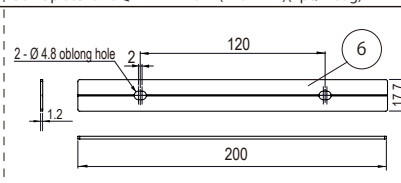

Option parts :
Aluminum mounting parts set for UQ FLEX (LFU-RL0018-AL-C) (5 pcs/bag)

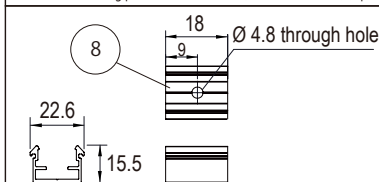

Accessories for rail & Option parts :
SUS hold Clip for UQ FLEX AL rail (LFU-PT-C)(5pcs/ 1bag)



Spec · Rating may be subject to change without announcements.

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Silicone		
2 Lead wire			
3-1 Connector			
3-2 Connector			
4 Aluminum mounting rail	Aluminum		
5 SUS hold clip	SUS		
6 Joint plate	SUS		
7 SUS Mounting clip	SUS		
8 Aluminum mounting parts	Aluminum		
9 Power supply cable(Connector cap)		Red+, Black-	
10 Joint cable			

Spec	Input voltage : DC24V	Max. length : 10m	Light Source color :	Item Number
Power consumption :	15.8W/m or 12.6W/m or 8.4W/m		Daylight white : D : 6500K	LFU-T1000WR-W-DF-O-8/12/15 LFU-T1000WR-L30-DF-O-8/12/15 LFU-T1000WR-L27-DF-O-8/12/15 LFU-T1000WR-L24-DF-O-8/12/15
Environment :	In & Outdoor, IP67		Natural white : N : 5300K	
Operating temperature :	-5°C~+45°C		White : W : 4200K	
Option parts :	SUS Mounting Clip for UQ FLEX,		Warm white 3500K : WW : 3500K	
	Aluminum Mounting rail 950 for UQ FLEX,		Warm white 3000K : L30 : 3000K	
	SUS hold Clip for UQ FLEX AL rail,		Warm white 2700K : L27 : 2700K	
	Joint plate for UQ FLEX AL rail, Joint cable 1M for UQ FLEX,		Warm white 2400K : L24 : 2400K	
	Power supply cable 10M for UQ FLEX(Connector caps attached)		Warm white 2100K : L21 : 2100K	
	AL mounting parts set for UQ FLEX		Warm white 1900K : L19 : 1900K	

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410

Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461

Korea Office
Tel: +82-2-508-2541

Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail: info@luci.co.jp

luci.co.jp

UQ series

Luci UQ FLEX IP67



Luci UQ FLEX IP67(15.8W/m or 12.6W/m or 8.4W/m, Both ends lead wire-Straight feed)



Luci Pte., Ltd.

2022.08.16

W: Both ends lead, S: Straight feed

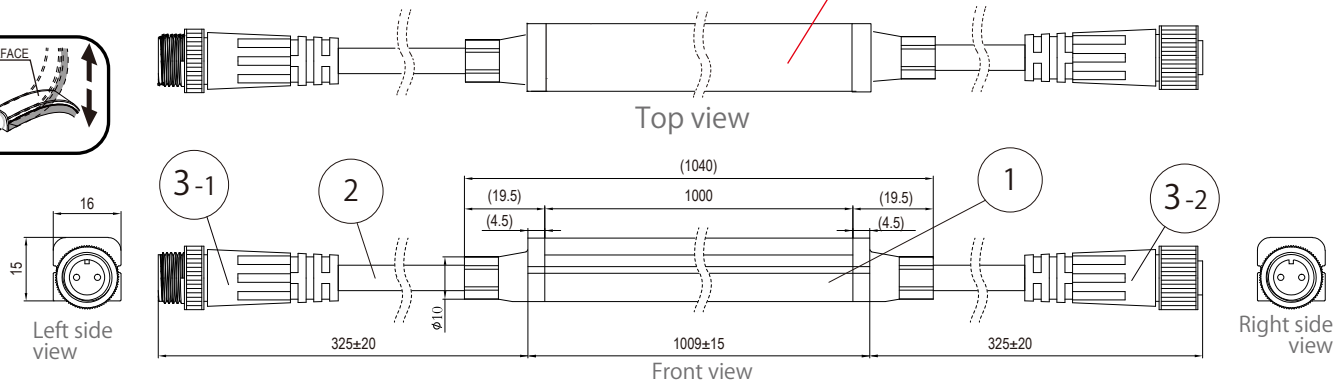

Option parts: SUS Mounting clip for UQ FLEX (LFU-RC-B) (5pcs/1bag)	Option parts: Power supply cable 10M for UQ FLEX (CAD-V010M-FPNN-O)	Option parts: Joint cable 1M for UQ FLEX (CAD-1000-MPFP-O)
Option parts: Aluminum mounting rail 950 set for UQ FLEX (LFU-RL0950-AL-C)	Accessories for rail & Option parts: SUS hold Clip for UQ FLEX AL rail (LFU-PT-C)(5pcs/ 1bag)	Accessories for rail & Option parts: Joint plate for UQ FLEX AL rail (LFU-PT-E)(1pc/ 1bag)
Option parts: Aluminum mounting parts set for UQ FLEX (LFU-RL0018-AL-C) (5 pcs/bag)	Accessories for rail & Option parts: SUS hold Clip for UQ FLEX AL rail (LFU-PT-C)(5pcs/ 1bag)	

Spec・Rating may be subject to change without announcements.

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Silicone		
2 Lead wire			
3-1 Connector			
3-2 Connector			
4 Aluminum mounting rail	Aluminum		
5 SUS hold clip	SUS		
6 Joint plate	SUS		
7 SUS Mounting clip	SUS		
8 Aluminum mounting parts	Aluminum		
9 Power supply cable(Connector cap)		Red+, Black-	
10 Joint cable			

Spec	Input voltage : DC24V	Max. length : 10m	Light Source color :	Item Number
Power consumption :	15.8W/m or 12.6W/m or 8.4W/m		Daylight white : D : 6500K	LFU-T1000WS-W-DF-O-8/12/15 LFU-T1000WS-L30-DF-O-8/12/15 LFU-T1000WS-L27-DF-O-8/12/15 LFU-T1000WS-L24-DF-O-8/12/15
Environment :	In & Outdoor, IP67		Natural white : N : 5300K	
Operating temperature :	-5°C~+45°C		White : W : 4200K	
Option parts :	SUS Mounting Clip for UQ FLEX,		Warm white 3500K : WW : 3500K	
	Aluminum Mounting rail 950 for UQ FLEX,		Warm white 3000K : L30 : 3000K	
	SUS hold Clip for UQ FLEX AL rail,		Warm white 2700K : L27 : 2700K	
	Joint plate for UQ FLEX AL rail, Joint cable1M for UQ FLEX,		Warm white 2400K : L24 : 2400K	
	Power supply cable 10M for UQ FLEX(Connector caps attached)		Warm white 2100K : L21 : 2100K	
	AL mounting parts set for UQ FLEX		Warm white 1900K : L19 : 1900K	

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410

Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461

Korea Office
Tel: +82-2-508-2541

Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

luci.co.jp

UQ series

Luci UQ FLEX IP67




Luci UQ FLEX IP67(15.8W/m or 12.6W/m or 8.4W/m, Single end lead wire-Back feed)




Luci Pte., Ltd.

2022.08.16


S: Single end lead, B: Back feed

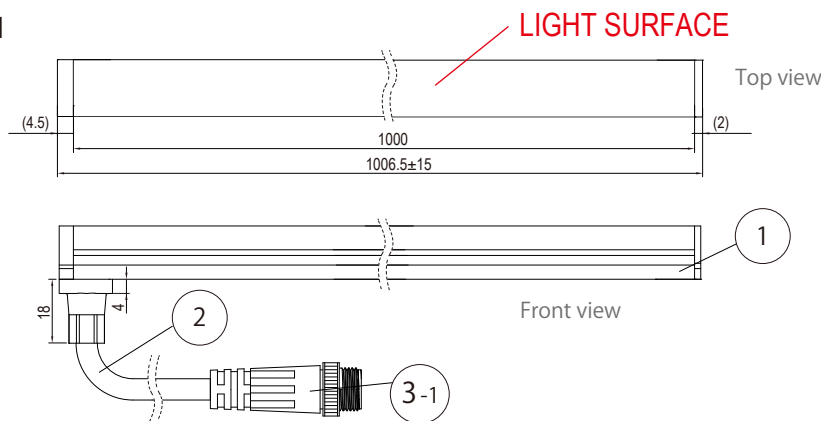


Option parts :
SUS Mounting clip for UQ FLEX (LFU-RC-B) (5pcs/1bag)




Option parts :
Power supply cable 10M for UQ FLEX (CAD-V010M-FPN-O)

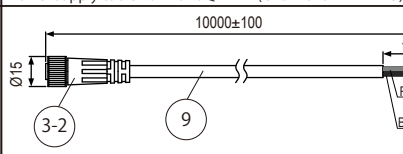


Option parts:
Joint cable 1M for UQ FLEX (CAD-1000-MPFP-O)




Option parts:
Aluminum mounting rail 950 set for UQ FLEX (LFU-RL0950-AL-C)

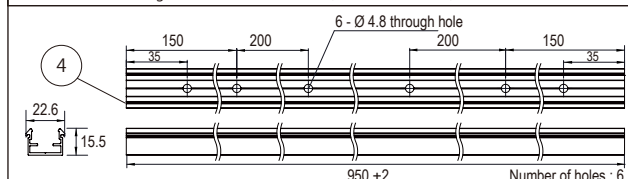


Accessories for rail & Option parts:
SUS hold Clip for UQ FLEX AL rail (LFU-PT-C)(5pcs/1bag)

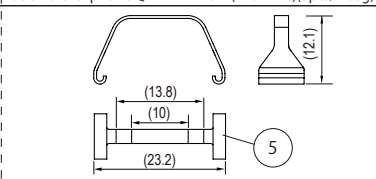


Accessories for rail & Option parts:
Joint plate for UQ FLEX AL rail (LFU-PT-E)(1pc/1bag)

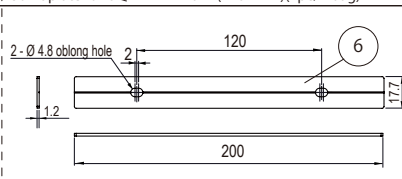

Option parts:
Aluminum mounting parts set for UQ FLEX (LFU-RL0018-AL-C) (5 pcs/bag)

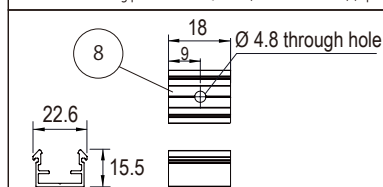

Accessories for rail & Option parts:
SUS hold Clip for UQ FLEX AL rail (LFU-PT-C)(5pcs/1bag)



Spec · Rating may be subject to change without announcements.

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body	Silicone		
2	Lead wire			
3-1	Connector			
3-2	Connector			
4	Aluminum mounting rail	Aluminum		
5	SUS hold clip	SUS		
6	Joint plate	SUS		
7	SUS Mounting clip	SUS		
8	Aluminum mounting parts	Aluminum		
9	Power supply cable(Connector cap)		Red+, Black-	
10	Joint cable			

Spec	Input voltage : DC24V	Max. length : 10m	Light Source color :	Item Number
Power consumption :	15.8W/m or 12.6W/m or 8.4W/m		Daylight white : D : 6500K	LFU-T1000SB-W-DF-O-8/12/15 LFU-T1000SB-L30-DF-O-8/12/15 LFU-T1000SB-L27-DF-O-8/12/15 LFU-T1000SB-L24-DF-O-8/12/15
Environment :	In & Outdoor, IP67		Natural white : N : 5300K	
Operating temperature :	-5°C~+45°C		White : W : 4200K	
Option parts :	SUS Mounting Clip for UQ FLEX,		Warm white 3500K : WW : 3500K	
	Aluminum Mounting rail 950 for UQ FLEX,		Warm white 3000K : L30 : 3000K	
	SUS hold Clip for UQ FLEX AL rail,		Warm white 2700K : L27 : 2700K	
	Joint plate for UQ FLEX AL rail, Joint cable 1M for UQ FLEX,		Warm white 2400K : L24 : 2400K	
	Power supply cable 10M for UQ FLEX(Connector capis attached)		Warm white 2100K : L21 : 2100K	
	AL mounting parts set for UQ FLEX		Warm white 1900K : L19 : 1900K	

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd.

<http://www.luci.co.jp>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410

Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461

Korea Office
Tel: +82-2-508-2541

Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

luci.co.jp

UQ series

Luci UQ FLEX IP67



Luci UQ FLEX IP67(15.8W/m or 12.6W/m or 8.4W/m, Single end lead wire-Side feed)



Luci Pte., Ltd.

2022.08.16

S: Single end lead, R: Side (Right) feed

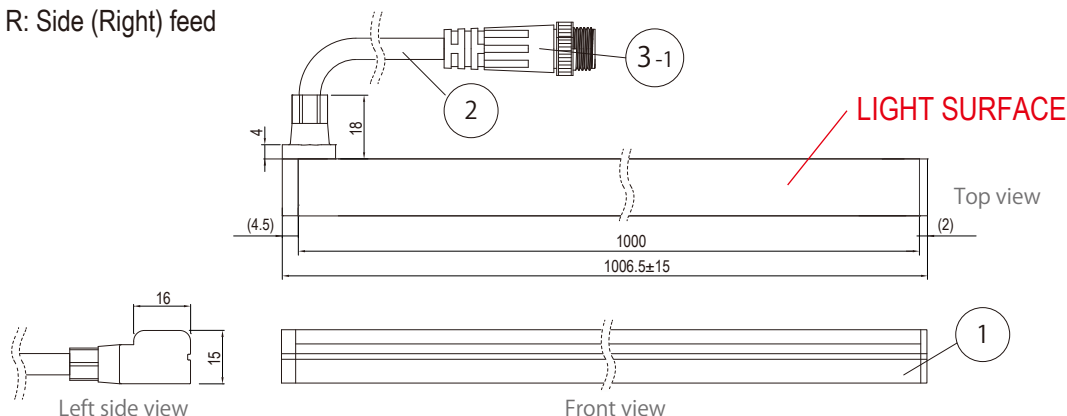

Option parts : SUS Mounting clip for UQ FLEX (LFU-RC-B) (5pcs/1bag) 7	Option parts : Power supply cable 10M for UQ FLEX (CAD-V010M-FPNN-O) 3-2 9 Red : + Black : - 9 ※ Connector cap is attached.	Option parts : Joint cable 1M for UQ FLEX (CAD-1000-MPFP-O) 3-1 10 3-2
Option parts : Aluminum mounting rail 950 set for UQ FLEX (LFU-RL0950-AL-C) 4	Accessories for rail & Option parts : SUS hold Clip for UQ FLEX AL rail (LFU-PT-C)(5pcs/ 1bag) 5	Accessories for rail & Option parts : Joint plate for UQ FLEX AL rail (LFU-PT-E)(1pc/ 1bag) 6

Option parts : Aluminum mounting parts set for UQ FLEX (LFU-RL0018-AL-C) (5 pcs/bag) 8	Accessories for rail & Option parts : SUS hold Clip for UQ FLEX AL rail (LFU-PT-C)(5pcs/ 1bag) 5
---	---

Spec • Rating may be subject to change without announcements.

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Silicone		
2 Lead wire			
3-1 Connector			
3-2 Connector			
4 Aluminum mounting rail	Aluminum		
5 SUS hold clip	SUS		
6 Joint plate	SUS		
7 SUS Mounting clip	SUS		
8 Aluminum mounting parts	Aluminum		
9 Power supply cable(Connector cap)		Red+, Black-	
10 Joint cable			

Spec	Input voltage : DC24V	Max. length : 10m	Light Source color :	Item Number
	Power consumption : 15.8W/m or 12.6W/m or 8.4W/m		Daylight white : D : 6500K	LFU-T1000SR-W-DF-O-8/12/15 LFU-T1000SR-L30-DF-O-8/12/15 LFU-T1000SR-L27-DF-O-8/12/15 LFU-T1000SR-L24-DF-O-8/12/15
	Environment : In & Outdoor, IP67		Natural white : N : 5300K	
	Operating temperature : -5℃~+45℃		White : W : 4200K	
	Option parts : SUS Mounting Clip for UQ FLEX,		Warm white 3500K : WW : 3500K	
	Aluminum Mounting rail 950 for UQ FLEX,		Warm white 3000K : L30 : 3000K	
	SUS hold Clip for UQ FLEX AL rail,		Warm white 2700K : L27 : 2700K	
	Joint plate for UQ FLEX AL rail, Joint cable1M for UQ FLEX,		Warm white 2400K : L24 : 2400K	
	Power supply cable 10M for UQ FLEX(Connector capis attached)		Warm white 2100K : L21 : 2100K	
	AL mounting parts set for UQ FLEX		Warm white 1900K : L19 : 1900K	

Job/Project Name	Area/Location/Circuit No.		
Product Code	Qty.	Length(mm)	
Luci Pte. Ltd.	http://www.luci.co.jp	E-mail: info@ luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ	Hong Kong Marketing Office	Korea Office	Shanghai China mainland Regional HQ
Tel: +65-6291-2410	Tel: +852-2219-8462 / Fax: +852-2219-8461	Tel: +82-2-508-2541	Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@ luci.co.jp

UQ series

Luci UQ FLEX IP67

Luci UQ FLEX IP67(15.8W/m or 12.6W/m or 8.4W/m, Both ends lead wire-Back feed)







Luci Pte., Ltd.

2022.08.16

W: Both ends lead, B: Back feed

LIGHT SURFACE

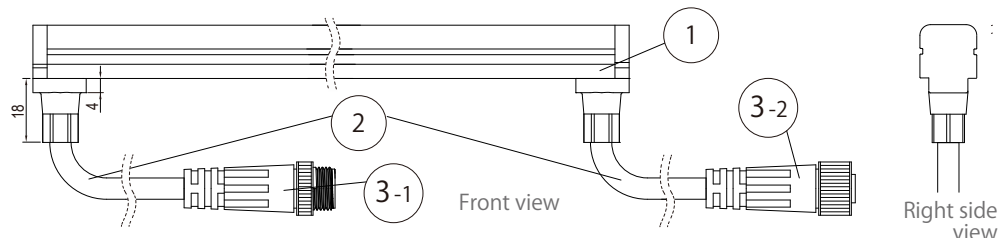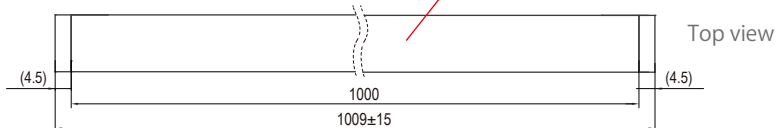

Option parts: SUS Mounting clip for UQ FLEX (LFU-RC-B) (5pcs/1bag)	Option parts: Power supply cable 10M for UQ FLEX (CAD-V010M-FPNM-O)	Option parts: Joint cable 1M for UQ FLEX (CAD-1000-MPFP-O)

Option parts: Aluminum mounting rail 950 set for UQ FLEX (LFU-RL0950-AL-C)	Accessories for rail & Option parts: SUS hold Clip for UQ FLEX AL rail (LFU-PT-C)(5pcs/ 1bag)	Accessories for rail & Option parts: Joint plate for UQ FLEX AL rail (LFU-PT-E)(1pc/ 1bag)

Option parts: Aluminum mounting parts set for UQ FLEX (LFU-RL0018-AL-C) (5 pcs/bag)	Accessories for rail & Option parts: SUS hold Clip for UQ FLEX AL rail (LFU-PT-C)(5pcs/ 1bag)

Spec・Rating may be subject to change without announcements.

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Silicone		
2 Lead wire			
3-1 Connector			
3-2 Connector			
4 Aluminum mounting rail	Aluminum		
5 SUS hold clip	SUS		
6 Joint plate	SUS		
7 SUS Mounting clip	SUS		
8 Aluminum mounting parts	Aluminum		
9 Power supply cable(Connector cap)		Red+, Black-	
10 Joint cable			

Spec	Input voltage : DC24V	Max. length : 10m	Light Source color :	Item Number
Power consumption :	15.8W/m or 12.6W/m or 8.4W/m		Daylight white : D : 6500K	LFU-T1000WB-W-DF-O-8/12/15 LFU-T1000WB-L30-DF-O-8/12/15 LFU-T1000WB-L27-DF-O-8/12/15 LFU-T1000WB-L24-DF-O-8/12/15
Environment :	In & Outdoor, IP67		Natural white : N : 5300K	
Operating temperature :	-5℃~+45℃		White : W : 4200K	
Option parts :	SUS Mounting Clip for UQ FLEX,		Warm white 3500K : WW : 3500K	
	Aluminum Mounting rail 950 for UQ FLEX,		Warm white 3000K : L30 : 3000K	
	SUS hold Clip for UQ FLEX AL rail,		Warm white 2700K : L27 : 2700K	
	Joint plate for UQ FLEX AL rail, Joint cable1M for UQ FLEX,		Warm white 2400K : L24 : 2400K	
	Power supply cable 10M for UQ FLEX(Connector capis attached)		Warm white 2100K : L21 : 2100K	
	AL mounting parts set for UQ FLEX		Warm white 1900K : L19 : 1900K	

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd.

<http://www.luci.co.jp>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410

Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461

Korea Office
Tel: +82-2-508-2541

Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@

luci.co.jp

UQ series

Luci UQ FLEX IP67

Luci UQ FLEX IP67(15.8W/m or 12.6W/m or 8.4W/m, Single end lead wire-Straight feed)





Luci Pte., Ltd.

2022.08.16

S: Single end lead, S: Straight feed

LIGHT SURFACE

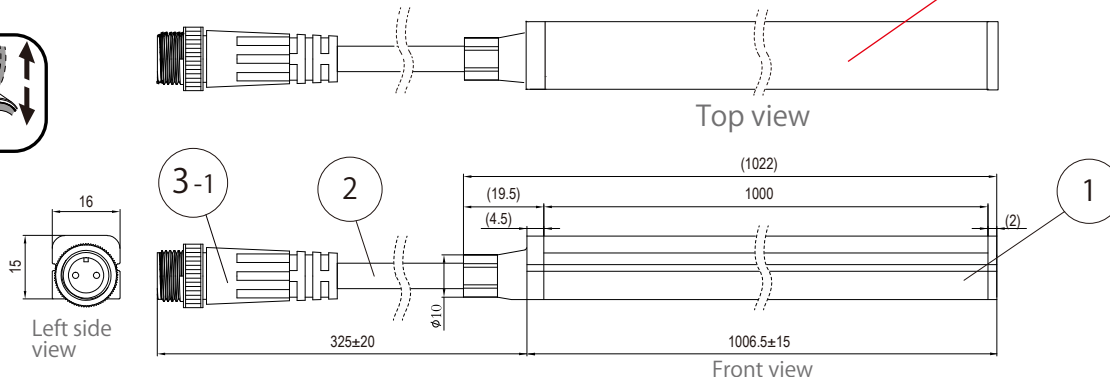

Option parts : SUS Mounting clip for UQ FLEX (LFU-RC-B) (5pcs /1bag)	Option parts : Power supply cable 10M for UQ FLEX (CAD-V010M-FPNN-O)	Option parts: Joint cable 1M for UQ FLEX (CAD-1000-MPPF-O)
Option parts: Aluminum mounting rail 950 set for UQ FLEX (LFU-RL0950-AL-C)	Accessories for rail & Option parts: SUS hold Clip for UQ FLEX AL rail (LFU-PT-C)(5pcs/ 1bag)	Accessories for rail & Option parts: Joint plate for UQ FLEX AL rail (LFU-PT-E)(1pc/ 1bag)
Option parts: Aluminum mounting parts set for UQ FLEX (LFU-RL0018-AL-C) (5 pcs/bag)	Accessories for rail & Option parts: SUS hold Clip for UQ FLEX AL rail (LFU-PT-C)(5pcs/ 1bag)	

Spec • Rating may be subject to change without announcements.

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Silicone		
2 Lead wire			
3-1 Connector			
3-2 Connector			
4 Aluminum mounting rail	Aluminum		
5 SUS hold clip	SUS		
6 Joint plate	SUS		
7 SUS Mounting clip	SUS		
8 Aluminum mounting parts	Aluminum		
9 Power supply cable(Connector cap)		Red+, Black-	
10 Joint cable			

Spec	Item Number
Input voltage : DC24V	LFU-T1000SS-W-DF-O-8/12/15 LFU-T1000SS-L30-DF-O-8/12/15 LFU-T1000SS-L27-DF-O-8/12/15 LFU-T1000SS-L24-DF-O-8/12/15
Max. length : 10m	
Power consumption : 15.8W/m or 12.6W/m or 8.4W/m	
Environment : In & Outdoor, IP67	
Operating temperature : -5°C~+45°C	
Option parts : SUS Mounting Clip for UQ FLEX,	
Aluminum Mounting rail 950 for UQ FLEX,	
SUS hold Clip for UQ FLEX AL rail,	
Joint plate for UQ FLEX AL rail, Joint cable1M for UQ FLEX,	
Power supply cable 10M for UQ FLEX(Connector capis attached)	
AL mounting parts set for UQ FLEX	

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)
Luci Pte. Ltd. http://www.luci.co.jp	E-mail: info@ luci.co.jp
Singapore World HQ	Hong Kong Marketing Office
Tel: +65-6291-2410	Tel: +852-2219-8462 / Fax: +852-2219-8461
	Korea Office
	Tel: +82-2-508-2541
	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
	Shanghai China mainland Regional HQ
	Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@ luci.co.jp

Luci UQ FLEX IP67 Custom Order

Model No

LFU-T

Length

Cable type1

Cable type2

Light source color

DF-O

Wattage

Length(L)

Refer to
"Costom order products size"

Cable type 1

Both ends lead wire : W
One end lead wire : S

Cable type 2

Straight feed : S
Back feed : B
Side feed : R


Light sorce color

Daylight white : D : 6500K
Natural white : N : 5300K
White : W : 4200K
Warm white 3500K : WW : 3500K
Warm white 3000K : L30 : 3000K
Warm white 2700K : L27 : 2700K
Warm white 2400K : L24 : 2400K
Warm white 2100K : L21 : 2100K
Warm white 1900K : L19 : 1900K

Wattage

15 : 15.8W/m
12 : 12.6W/m
8 : 8.4W/m

Dimension

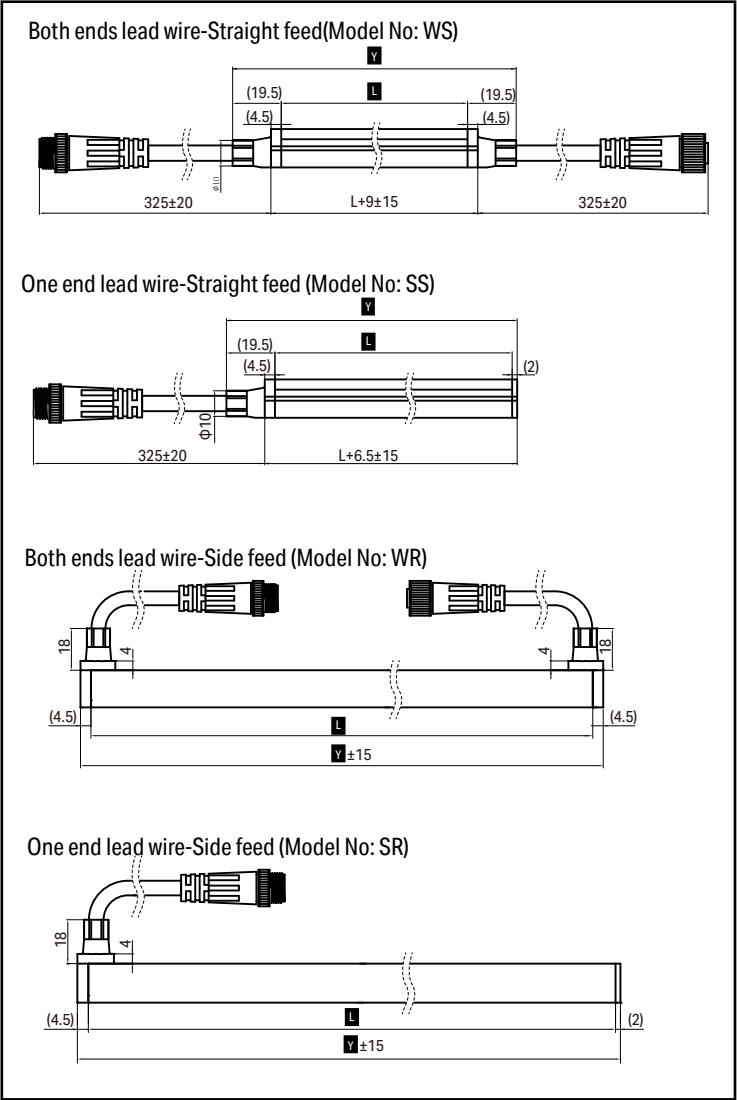

Custom order products size

Model No.	L	Y						Wattage (W)		
		WS	SS	WR	SR	WB	WS	8.4W/m	12.6W/m	15.8W/m
0100	100	139	121.5	109	106.5	109	106.5	0.8	1.3	1.6
0200	200	239	215.5	209	206.5	209	206.5	1.7	2.5	3.2
0300	300	339	309.5	309	306.5	309	306.5	2.5	3.8	4.7
0400	400	439	403.5	409	406.5	409	406.5	3.4	5.0	6.3
0500	500	539	497.5	509	506.5	509	506.5	4.2	6.3	7.9
0600	600	639	591.5	609	606.5	609	606.5	5.0	7.6	9.5
0700	700	739	685.5	709	706.5	709	706.5	5.9	8.8	11.1
0800	800	839	779.5	809	806.5	809	806.5	6.7	10.1	12.6
0900	900	939	873.5	909	906.5	909	906.5	7.6	11.3	14.2
1000	1000	1039	967.5	1009	1006.5	1009	1006.5	8.4	12.6	15.8
1100	1100	1139	1061.5	1109	1106.5	1109	1106.5	9.2	13.9	17.4
1200	1200	1239	1155.5	1209	1206.5	1209	1206.5	10.1	15.1	19.0
1300	1300	1339	1249.5	1309	1306.5	1309	1306.5	10.9	16.4	20.5
1400	1400	1439	1343.5	1409	1406.5	1409	1406.5	11.8	17.6	22.1
1500	1500	1539	1437.5	1509	1506.5	1509	1506.5	12.6	18.9	23.7
1600	1600	1639	1531.5	1609	1606.5	1609	1606.5	13.4	20.2	25.3
1700	1700	1739	1625.5	1709	1706.5	1709	1706.5	14.3	21.4	26.9
1800	1800	1839	1719.5	1809	1806.5	1809	1806.5	15.1	22.7	28.4
1900	1900	1939	1813.5	1909	1906.5	1909	1906.5	16.0	23.9	30.0
2000	2000	2039	1907.5	2009	2006.5	2009	2006.5	16.8	25.2	31.6