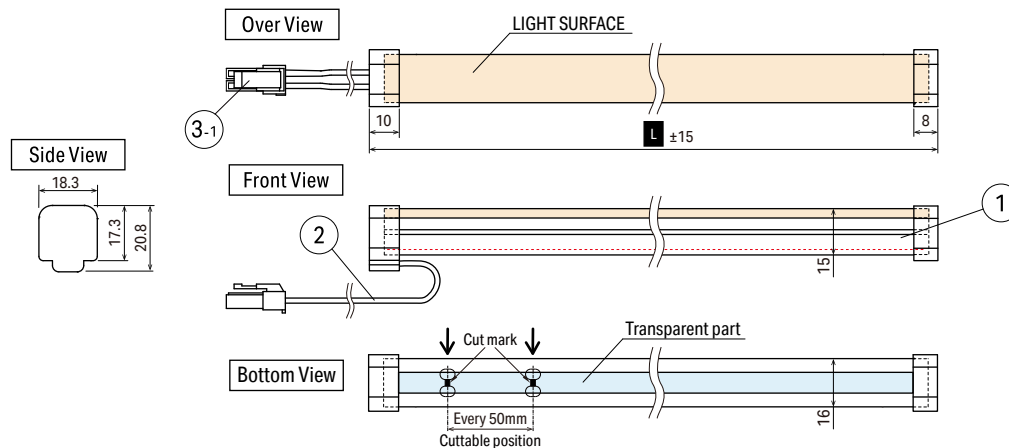


UQ series

Luci SHIN UQ FLEX α Luci SHIN UQ FLEX α (Indoor) (One end lead, wire - Back feed)

Luci Pte., Ltd.

2025.01.27



Accessories: PC Mounting clip for UQ FLEX (LFU-RC) (5pcs/1bag) 30 4.5 15 41.5 17	Accessories: Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I) 3000⁺⁴⁰⁰₀ 3-2 10 ⚠ Check the label on the DC + side for polarity.	Accessories: Joint cable 1000mm/5000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I) L 3-2 10 3-1 <table><thead><tr><th>Model number</th><th>L(mm)</th></tr></thead><tbody><tr><td>CAD-1000-MCFC-I</td><td>1000±15</td></tr><tr><td>CAD-5000-MCFC-I</td><td>5000⁺²⁵⁰₀</td></tr></tbody></table>	Model number	L(mm)	CAD-1000-MCFC-I	1000±15	CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀
Model number	L(mm)							
CAD-1000-MCFC-I	1000±15							
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀							
Accessories: Aluminum mounting rail 950 for UQ FLEX Indoor (LFU-RL0950-AL-C-I) 150 200 200 150 35 6- Ø 4.8 through hole 950 ±2 Number of holes: 6	Attachment for rail & Accessories: PC hold Clip for UQ FLEX AL rail (LFU-PT-B)(5pcs/ 1bag) 5 25.2 14.7 15	Attachment for rail & Accessories: Joint plate for UQ FLEX AL rail (LFU-PT-E)(1pc/ 1bag) 2- Ø 4.8 oblong hole 2 120 17.7 1.2 200						
Accessories: Aluminum mounting parts for UQ FLEX Indoor (LFU-RL0018-AL-C-I) (5 pcs/bag) 18 9 Ø 4.8 through hole 22.6 15.5	Attachment for rail & Accessories: PC hold Clip for UQ FLEX AL rail (LFU-PT-B)(5pcs/1 bag) 5 25.2 14.7 15	Attachment & Accessories: Endcap for UQ FLEX indoor (LFU-EC) (2 pcs/bag) 11 18.3 17.3 8						

Spec • Rating may be subject to change without announcements.

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Silicone	Diffuser	
2 Lead wire			
3 Connector			
4 Aluminium mounting rail C	Aluminum		
5 PC hold clip	PC		
6 Joint plate	SUS		
7 PC Mounting clip	PC		
8 Aluminum mounting Parts	Aluminum		
9 Power supply cable			
10 Joint cable		Red+, Black-	
11 End cap	Silicone		

Spec	Input voltage : DC24V	Light Source color : Daylight white : D : 6500K	Model No.
	Wattage : W/m (Refer to Appendix)	Natural white : N : 5000K	LFUAY-7[Length]SB-[Light source color]-DF-I-[Wattage]
	Environment : Indoor	White : W : 4000K	D : 6500K 6 : 6.4 W/m
	Operating temperature : -5°C ~ +45°C	Warm white 3500K : WW : 3500K	N : 5000K 10 : 10.8 W/m
	Attachments : Endcap	Warm white 3000K : L30 : 3000K	W : 4000K 15 : 15.9 W/m
	Accessories : Aluminum mounting rail 950,	Warm white 2700K : L27 : 2700K	WW : 3500K 20 : 20.7 W/m
	Aluminum mounting parts,	Warm white 2500K : L25 : 2500K	L30 : 3000K
	PC hold Clip, PC Mounting Clip, Joint plate, Endcap,	Warm white 2200K : L22 : 2200K	L27 : 2700K
	Joint cable 1000mm/5000mm,	Warm white 2000K : L20 : 2000K	L25 : 2500K
	Power supply cable 3000mm,	Warm white 1800K : L18 : 1800K	L22 : 2200K
			L20 : 2000K
			L18 : 1800K

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd.

http://www.luci.co.jp

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

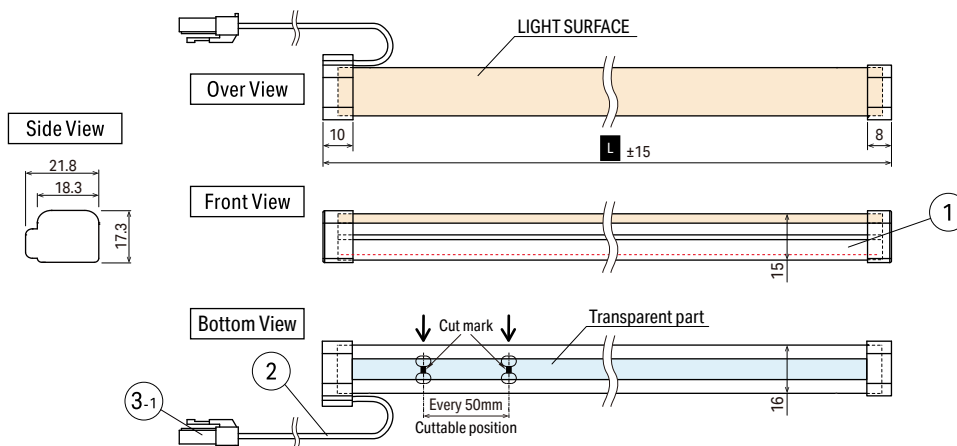
Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / E-mail: info@luci.co.jp

UQ series

Luci SHIN UQ FLEX α Luci SHIN UQ FLEX α (Indoor) (One end lead, wire - Side feed)

Luci Pte., Ltd.

2025.01.27



Accessories : PC Mounting clip for UQ FLEX (LFU-RC) (5pcs/1bag)		Accessories : Power supply cable 3000mm for SL connector (CAD-3000-MCNN-I)		Accessories : Joint cable 1000mm/5000mm for SL connector (CAD-1000-MCFC-I,CAD-5000-MCFC-I)							
				<table><tr><th>Model number</th><th>L(mm)</th></tr><tr><td>CAD-1000-MCFC-I</td><td>1000±15</td></tr><tr><td>CAD-5000-MCFC-I</td><td>5000⁺²⁵⁰₀</td></tr></table>		Model number	L(mm)	CAD-1000-MCFC-I	1000±15	CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀
Model number	L(mm)										
CAD-1000-MCFC-I	1000±15										
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀										
Accessories : Aluminum mounting rail 950 for UQ FLEX Indoor (LFU-RL0950-AL-C-I)		Attachment for rail & Accessories : PC hold Clip for UQ FLEX AL rail (LFU-PT-B)(5pcs/ 1bag)		Attachment for rail & Accessories : Joint plate for UQ FLEX AL rail (LFU-PT-E)(1pc/ 1bag)							
Accessories : Aluminum mounting parts for UQ FLEX Indoor (LFU-RL0018-AL-C-I) (5 pcs/bag)		Attachment for rail & Accessories : PC hold Clip for UQ FLEX AL rail (LFU-PT-B)(5pcs/ 1bag)		Attachment & Accessories : Endcap for UQ FLEX indoor (LFU-EC) (2 pcs/bag)							

Spec • Rating may be subject to change without announcements.

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Silicone	Diffuser	
2 Lead wire			
3 Connector			
4 Aluminium mounting rail C	Aluminum		
5 PC hold clip	PC		
6 Joint plate	SUS		
7 PC Mounting clip	PC		
8 Aluminum mounting Parts	Aluminum		
9 Power supply cable			
10 Joint cable		Red+, Black-	
11 End cap	Silicone		

Spec	Input voltage : DC24V	Light Source color :	Daylight white : D : 6500K	Model No.
	Wattage : W/m (Refer to Appendix)		Natural white : N : 5000K	LFUAY-T[Length]SR - [Light source color]- DF - I - [Wattage]
	Environment : Indoor		White : W : 4000K	
	Operating temperature : -5°C ~ +45°C		Warm white 3500K : WW : 3500K	
	Attachments : Endcap		Warm white 3000K : L30 : 3000K	
	Accessories : Aluminum mounting rail 950,		Warm white 2700K : L27 : 2700K	
	Aluminum mounting parts,		Warm white 2500K : L25 : 2500K	
	PC hold Clip, PC Mounting Clip, Joint plate, Endcap,		Warm white 2200K : L22 : 2200K	
	Joint cable 1000mm/5000mm,		Warm white 2000K : L20 : 2000K	
	Power supply cable 3000mm,		Warm white 1800K : L18 : 1800K	

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd.

<http://www.luci.co.jp>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

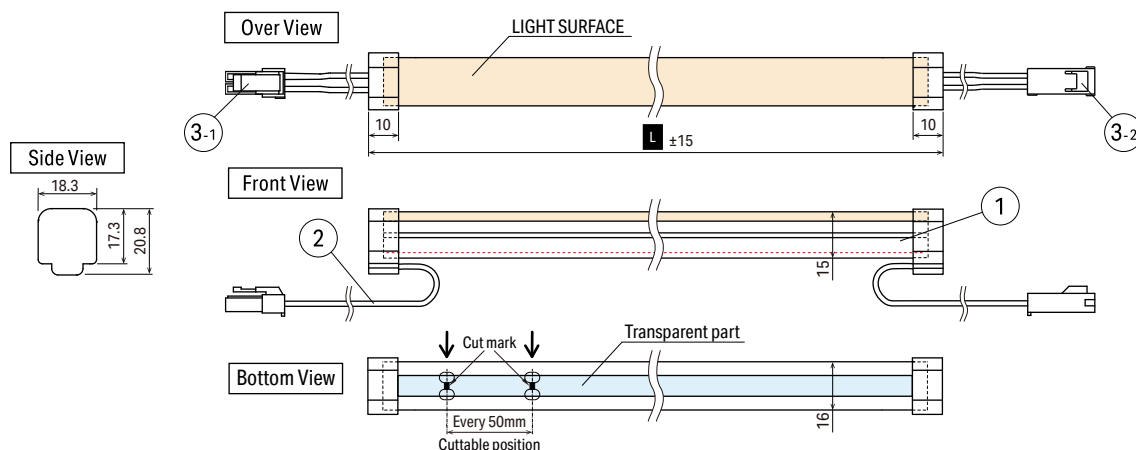
Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / E-mail: info@luci.co.jp


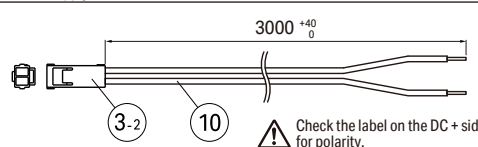
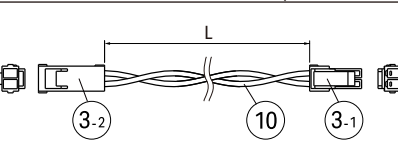
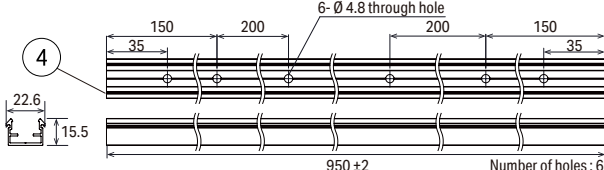

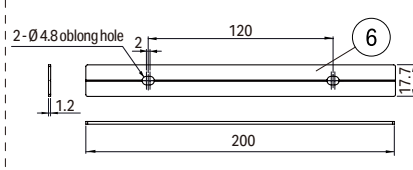



UQ series

Luci SHIN UQ FLEX α Luci SHIN UQ FLEX α (Indoor) (Both ends lead, wire - Back feed)

Luci Pte., Ltd.


2025.01.27



Accessories : PC Mounting clip for UQ FLEX (LFU-RC) (5pcs/1bag) 	Accessories : Power supply cable 3000mm for SL connector (CAD-3000-MCNN-I) 	Accessories : Joint cable 1000mm/5000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)  <table border="1" data-bbox="1342 871 1505 938"><thead><tr><th>Model number</th><th>L(mm)</th></tr></thead><tbody><tr><td>CAD-1000-MCFC-I</td><td>1000±15</td></tr><tr><td>CAD-5000-MCFC-I</td><td>5000⁺²⁵⁰₀</td></tr></tbody></table>	Model number	L(mm)	CAD-1000-MCFC-I	1000±15	CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀
Model number	L(mm)							
CAD-1000-MCFC-I	1000±15							
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀							
Accessories : Aluminum mounting rail 950 for UQ FLEX Indoor (LFU-RL0950-AL-C-I) 	Attachment for rail & Accessories : PC hold Clip for UQ FLEX AL rail (LFU-PT-B)(5pcs/ 1bag) 	Attachment for rail & Accessories : Joint plate for UQ FLEX AL rail (LFU-PT-E)(1pc/ 1bag) 						
Accessories: Aluminum mounting parts for UQ FLEX Indoor (LFU-RL0018-AL-C-I) (5 pcs/bag) 	Attachment for rail & Accessories : PC hold Clip for UQ FLEX AL rail (LFU-PT-B)(5pcs/ 1bag) 	Attachment & Accessories : Endcap for UQ FLEX indoor (LFU-EC) (2 pcs/bag) 						

Spec • Rating may be subject to change without announcements.

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Silicone	Diffuser	
2 Lead wire			
3 Connector			
4 Aluminium mounting rail C	Aluminum		
5 PC hold clip	PC		
6 Joint plate	SUS		
7 PC Mounting clip	PC		
8 Aluminum mounting Parts	Aluminum		
9 Power supply cable			
10 Joint cable		Red+, Black-	
11 End cap	Silicone		

Spec	Input voltage : DC24V	Light Source color : Daylight white : D : 6500K	Model No.
	Wattage : W/m (Refer to Appendix)	Natural white : N : 5000K	LFUAY-T[Length]WB-[Light source color]-DF-I-[Wattage]
	Environment : Indoor	White : W : 4000K	
	Operating temperature : -5°C ~ +45°C	Warm white 3500K : WW : 3500K	
	Attachments : Endcap	Warm white 3000K : L30 : 3000K	
	Accessories : Aluminum mounting rail 950,	Warm white 2700K : L27 : 2700K	
	Aluminum mounting parts,	Warm white 2500K : L25 : 2500K	
	PC hold Clip, PC Mounting Clip, Joint plate, Endcap,	Warm white 2200K : L22 : 2200K	
	Joint cable 1000mm/5000mm,	Warm white 2000K : L20 : 2000K	
	Power supply cable 3000mm,	Warm white 1800K : L18 : 1800K	

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd.

<http://www.luci.co.jp>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

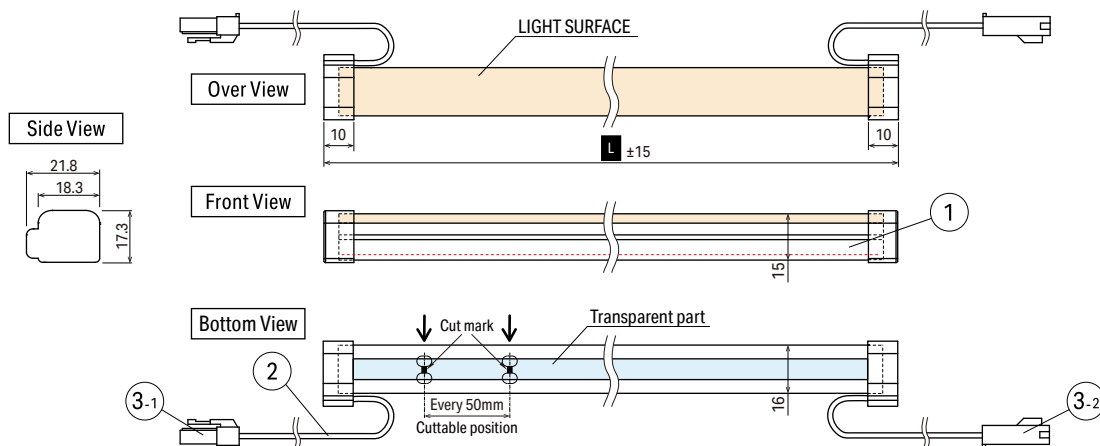
Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / E-mail: info@luci.co.jp



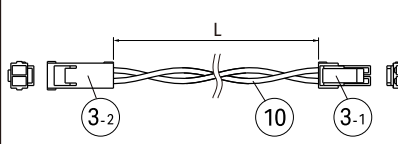
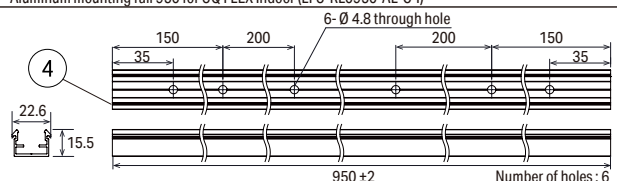

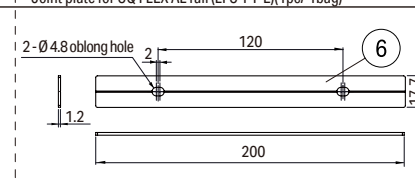



UQ series

Luci SHIN UQ FLEX α Luci SHIN UQ FLEX α (Indoor) (Both ends lead, wire - Side feed)

Luci Pte., Ltd.


2025.01.27



Accessories : PC Mounting clip for UQ FLEX (LFU-RC) (5pcs/1bag) 	Accessories : Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I) 	Accessories : Joint cable 1000mm/5000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)  <table border="1" data-bbox="1337 869 1503 938"><thead><tr><th>Model number</th><th>Length</th></tr></thead><tbody><tr><td>CAD-1000-MCFC-I</td><td>1000±15</td></tr><tr><td>CAD-5000-MCFC-I</td><td>5000⁺²⁵⁰₋₀</td></tr></tbody></table>	Model number	Length	CAD-1000-MCFC-I	1000±15	CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₋₀
Model number	Length							
CAD-1000-MCFC-I	1000±15							
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₋₀							
Accessories : Aluminum mounting rail 950 for UQ FLEX Indoor (LFU-RL0950-AL-C-I) 	Attachment for rail & Accessories : PC hold Clip for UQ FLEX AL rail (LFU-PT-B) (5pcs/1bag) 	Attachment for rail & Accessories : Joint plate for UQ FLEX AL rail (LFU-PT-E) (1pc/1bag) 						
Accessories: Aluminum mounting parts for UQ FLEX Indoor (LFU-RL0018-AL-C-I) (5 pcs/bag) 	Attachment for rail & Accessories : PC hold Clip for UQ FLEX AL rail (LFU-PT-B) (5pcs/1bag) 	Attachment & Accessories : Endcap for UQ FLEX indoor (LFU-EC) (2 pcs/bag) 						

Spec • Rating may be subject to change without announcements.

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Silicone	Diffuser	
2 Lead wire			
3 Connector			
4 Aluminium mounting rail C	Aluminum		
5 PC hold clip	PC		
6 Joint plate	SUS		
7 PC Mounting clip	PC		
8 Aluminum mounting Parts	Aluminum		
9 Power supply cable			
10 Joint cable		Red+, Black-	
11 End cap	Silicone		

Spec	Input voltage : DC24V	Light Source color :	Daylight white : D : 6500K	Model No.
Wattage : W/m (Refer to Appendix)	Max. length per circuit : 5m	Natural white : N : 5000K		LFUAY-T-Length-WR-[Light source color]-DF-I-[Wattage] D: 6500K 6: 6.4 W/m N: 5000K 10: 10.8 W/m W: 4000K 15: 15.9 W/m WW: 3500K 20: 20.7 W/m L30: 3000K L27: 2700K L25: 2500K L22: 2200K L20: 2000K L18: 1800K
Environment : Indoor	Max. fitting length : 5m	White : W : 4000K		
Operating temperature : -5°C ~ +45°C		Warm white 3500K : WW : 3500K		
Attachments : Endcap		Warm white 3000K : L30 : 3000K		
Accessories : Aluminum mounting rail 950,		Warm white 2700K : L27 : 2700K		
Aluminum mounting parts,		Warm white 2500K : L25 : 2500K		
PC hold Clip, PC Mounting Clip, Joint plate, Endcap,		Warm white 2200K : L22 : 2200K		
Joint cable 1000mm/5000mm,		Warm white 2000K : L20 : 2000K		
Power supply cable 3000mm,		Warm white 1800K : L18 : 1800K		

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd.

http://www.luci.co.jp

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / E-mail: info@luci.co.jp

Specifications [LFUAY - I]

LFUAY - Length** - Light source color - DF- I - Wattage

Specifications by length

Length	Fitting length (L)				Wattage	
	WR / WB	SR / SB	6 : 6.4w/m	10 : 10.8w/m	15 : 15.9w/m	20 : 20.7w/m
0050	58.0mm	57.5mm	0.3w	0.5w	0.8w	1.0w
0100	108.0mm	107.5mm	0.6w	1.1w	1.6w	2.1w
0150	158.0mm	157.5mm	1.0w	1.6w	2.4w	3.1w
0200	208.0mm	207.5mm	1.3w	2.2w	3.2w	4.1w
0250	258.0mm	257.5mm	1.6w	2.7w	4.0w	5.2w
0300	308.0mm	307.5mm	1.9w	3.3w	4.8w	6.2w
0350	358.0mm	357.5mm	2.2w	3.8w	5.6w	7.2w
0400	408.0mm	407.5mm	2.6w	4.3w	6.4w	8.3w
0450	458.0mm	457.5mm	2.9w	4.9w	7.1w	9.3w
0500	508.0mm	507.5mm	3.2w	5.4w	7.9w	10.3w
0550	558.0mm	557.5mm	3.5w	6.0w	8.7w	11.4w
0600	608.0mm	607.5mm	3.8w	6.5w	9.5w	12.4w
0650	658.0mm	657.5mm	4.2w	7.0w	10.3w	13.4w
0700	708.0mm	707.5mm	4.5w	7.6w	11.1w	14.5w
0750	758.0mm	757.5mm	4.8w	8.1w	11.9w	15.5w
0800	808.0mm	807.5mm	5.1w	8.7w	12.7w	16.5w
0850	858.0mm	857.5mm	5.4w	9.2w	13.5w	17.6w
0900	908.0mm	907.5mm	5.8w	9.8w	14.3w	18.6w
0950	958.0mm	957.5mm	6.1w	10.3w	15.1w	19.6w
1000	1008.0mm	1007.5mm	6.4w	10.8w	15.9w	20.7w
1050	1058.0mm	1057.5mm	6.7w	11.4w	16.7w	21.7w
1100	1108.0mm	1107.5mm	7.0w	11.9w	17.5w	22.7w
1150	1158.0mm	1157.5mm	7.3w	12.5w	18.3w	23.8w
1200	1208.0mm	1207.5mm	7.7w	13.0w	19.1w	24.8w
1250	1258.0mm	1257.5mm	8.0w	13.5w	19.9w	25.8w
1300	1308.0mm	1307.5mm	8.3w	14.1w	20.7w	26.9w
1350	1358.0mm	1357.5mm	8.6w	14.6w	21.4w	27.9w
1400	1408.0mm	1407.5mm	8.9w	15.2w	22.2w	28.9w
1450	1458.0mm	1457.5mm	9.3w	15.7w	23.0w	30.0w
1500	1508.0mm	1507.5mm	9.6w	16.3w	23.8w	31.0w
1550	1558.0mm	1557.5mm	9.9w	16.8w	24.6w	32.0w
1600	1608.0mm	1607.5mm	10.2w	17.3w	25.4w	33.1w
1650	1658.0mm	1657.5mm	10.5w	17.9w	26.2w	34.1w
1700	1708.0mm	1707.5mm	10.9w	18.4w	27.0w	35.1w
1750	1758.0mm	1757.5mm	11.2w	19.0w	27.8w	36.2w
1800	1808.0mm	1807.5mm	11.5w	19.5w	28.6w	37.2w
1850	1858.0mm	1857.5mm	11.8w	20.0w	29.4w	38.2w
1900	1908.0mm	1907.5mm	12.1w	20.6w	30.2w	39.3w
1950	1958.0mm	1957.5mm	12.5w	21.1w	31.0w	40.3w
2000	2008.0mm	2007.5mm	12.8w	21.7w	31.8w	41.3w
2050	2058.0mm	2057.5mm	13.1w	22.2w	32.6w	42.4w
2100	2108.0mm	2107.5mm	13.4w	22.8w	33.4w	43.4w
2150	2158.0mm	2157.5mm	13.7w	23.3w	34.2w	44.4w
2200	2208.0mm	2207.5mm	14.1w	23.8w	34.9w	45.5w
2250	2258.0mm	2257.5mm	14.4w	24.4w	35.7w	46.5w
2300	2308.0mm	2307.5mm	14.7w	24.9w	36.5w	47.5w
2350	2358.0mm	2357.5mm	15.0w	25.5w	37.3w	48.6w
2400	2408.0mm	2407.5mm	15.3w	26.0w	38.1w	49.6w
2450	2458.0mm	2457.5mm	15.7w	26.5w	38.9w	50.6w
2500	2508.0mm	2507.5mm	16.0w	27.1w	39.7w	51.7w

Length	Fitting length				Wattage	
	WR / WB	SR / SB	6 : 6.4w/m	10 : 10.8w/m	15 : 15.9w/m	20 : 20.7w/m
2550	2558.0mm	2557.5mm	16.3w	27.6w	40.5w	52.7w
2600	2608.0mm	2607.5mm	16.6w	28.2w	41.3w	53.8w
2650	2658.0mm	2657.5mm	16.9w	28.7w	42.1w	54.8w
2700	2708.0mm	2707.5mm	17.3w	29.3w	42.9w	55.8w
2750	2758.0mm	2757.5mm	17.6w	29.8w	43.7w	56.9w
2800	2808.0mm	2807.5mm	17.9w	30.3w	44.5w	57.9w
2850	2858.0mm	2857.5mm	18.2w	30.9w	45.3w	58.9w
2900	2908.0mm	2907.5mm	18.5w	31.4w	46.1w	60.0w
2950	2958.0mm	2957.5mm	18.9w	32.0w	46.9w	61.0w
3000	3008.0mm	3007.5mm	19.2w	32.5w	47.7w	62.0w
3050	3058.0mm	3057.5mm	19.5w	33.0w	48.4w	63.1w
3100	3108.0mm	3107.5mm	19.8w	33.6w	49.2w	64.1w
3150	3158.0mm	3157.5mm	20.1w	34.1w	50.0w	65.1w
3200	3208.0mm	3207.5mm	20.4w	34.7w	50.8w	66.2w
3250	3258.0mm	3257.5mm	20.8w	35.2w	51.6w	67.2w
3300	3308.0mm	3307.5mm	21.1w	35.8w	52.4w	68.2w
3350	3358.0mm	3357.5mm	21.4w	36.3w	53.2w	69.3w
3400	3408.0mm	3407.5mm	21.7w	36.8w	54.0w	70.3w
3450	3458.0mm	3457.5mm	22.0w	37.4w	54.8w	71.3w
3500	3508.0mm	3507.5mm	22.4w	37.9w	55.6w	72.4w
3550	3558.0mm	3557.5mm	22.7w	38.5w	56.4w	73.4w
3600	3608.0mm	3607.5mm	23.0w	39.0w	57.2w	74.4w
3650	3658.0mm	3657.5mm	23.3w	39.6w	58.0w	75.5w
3700	3708.0mm	3707.5mm	23.6w	40.1w	58.8w	76.5w
3750	3758.0mm	3757.5mm	24.0w	40.6w	59.6w	77.5w
3800	3808.0mm	3807.5mm	24.3w	41.2w	60.4w	78.6w
3850	3858.0mm	3857.5mm	24.6w	41.7w	61.2w	79.6w
3900	3908.0mm	3907.5mm	24.9w	42.3w	62.0w	80.6w
3950	3958.0mm	3957.5mm	25.2w	42.8w	62.7w	81.7w
4000	4008.0mm	4007.5mm	25.6w	43.3w	63.5w	82.7w
4050	4058.0mm	4057.5mm	25.9w	43.9w	64.3w	83.7w
4100	4108.0mm	4107.5mm	26.2w	44.4w	65.1w	84.8w
4150	4158.0mm	4157.5mm	26.5w	45.0w	65.9w	85.8w
4200	4208.0mm	4207.5mm	26.8w	45.5w	66.7w	86.8w
4250	4258.0mm	4257.5mm	27.2w	46.1w	67.5w	87.9w
4300	4308.0mm	4307.5mm	27.5w	46.6w	68.3w	88.9w
4350	4358.0mm	4357.5mm	27.8w	47.1w	69.1w	89.9w
4400	4408.0mm	4407.5mm	28.1w	47.7w	69.9w	91.0w
4450	4458.0mm	4457.5mm	28.4w	48.2w	70.7w	92.0w
4500	4508.0mm	4507.5mm	28.8w	48.8w	71.5w	93.0w
4550	4558.0mm	4557.5mm	29.1w	49.3w	72.3w	94.1w
4600	4608.0mm	4607.5mm	29.4w	49.8w	73.1w	95.1w
4650	4658.0mm	4657.5mm	29.7w	50.4w	73.9w	96.1w
4700	4708.0mm	4707.5mm	30.0w	50.9w	74.7w	97.2w
4750	4758.0mm	4757.5mm	30.4w	51.5w	75.5w	98.2w
4800	4808.0mm	4807.5mm	30.7w	52.0w	76.2w	99.2w
4850	4858.0mm	4857.5mm	31.0w	52.6w	77.0w	100.3w
4900	4908.0mm	4907.5mm	31.3w	53.1w	77.8w	101.3w
4950	4958.0mm	4957.5mm	31.6w	53.6w	78.6w	102.3w
5000	5008.0mm	5007.5mm	32.0w	54.2w	79.4w	103.4w

Photometry characterristic

Wattage 6 : 6.4W/m										
Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18
Luminous flux	539lm/m	534lm/m	524lm/m	520lm/m	505lm/m	477lm/m	353lm/m	329lm/m	300lm/m	291lm/m
Luminaire efficiency	84.4lm/W	83.6lm/W	82.0lm/W	81.4lm/W	79.0lm/W	74.6lm/W	55.2lm/W	51.5lm/W	46.9lm/W	45.5lm/W

Wattage 10 : 10.8W/m										
Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18
Luminous flux	898lm/m	890lm/m	874lm/m	866lm/m	842lm/m	794lm/m	588lm/m	548lm/m	500lm/m	485lm/m
Luminaire efficiency	82.9lm/W	82.1lm/W	80.7lm/W	79.9lm/W	77.7lm/W	73.3lm/W	54.3lm/W	50.6lm/W	46.1lm/W	44.7lm/W

Wattage 15 : 15.9W/m										
Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18
Luminous flux	1353lm/m	1341lm/m	1318lm/m	1306lm/m	1270lm/m	1198lm/m	886lm/m	826lm/m	755lm/m	731lm/m
Luminaire efficiency	85.2lm/W	84.4lm/W	83.0lm/W	82.2lm/W	79.9lm/W	75.4lm/W	55.8lm/W	52.0lm/W	47.5lm/W	46.0lm/W

Wattage 20 : 20.7W/m										
Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18
Luminous flux	1649lm/m	1635lm/m	1605lm/m	1591lm/m	1547lm/m	1460lm/m	1080lm/m	1007lm/m	920lm/m	890lm/m
Luminaire efficiency	79.8lm/W	79.1lm/W	77.6lm/W	77.0lm/W	74.8lm/W	70.6lm/W	52.2lm/W	48.7lm/W	44.5lm/W	43.1lm/W

Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18
CRI	Ra96	Ra93	Ra97	Ra97	Ra95	Ra94	Ra94	Ra93	Ra91	Ra90

The values are measured values, not guaranteed values.