


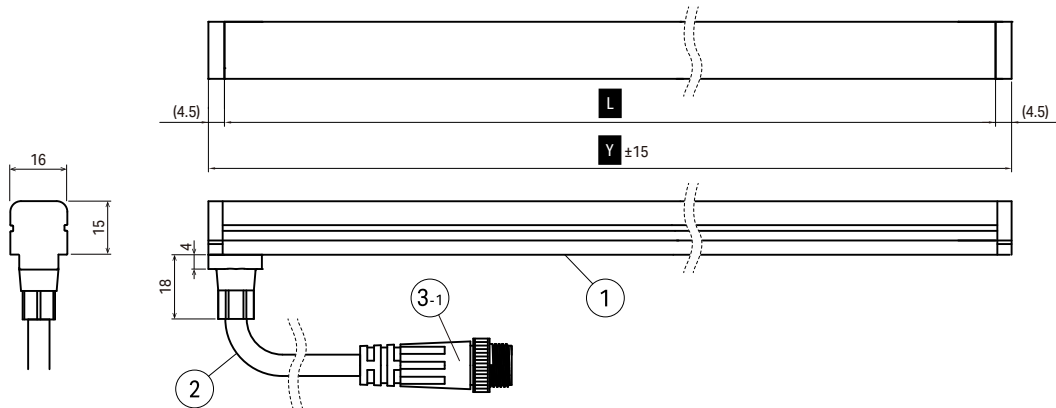

Accessories: Mounting clip B for UQ FLEX (LFU-RC-B) (5pcs/1bag)	Accessories: Power supply cable 10M for UQ FLEX (CAD-V010M-FPNN-0)	Accessories: Joint cable 1M for UQ FLEX (CAD-1000-MPPF-0)
Accessories: Aluminium mounting rail C type950 for UQ FLEX H13 (LFU-RL0950-AL-C)	Attachments for rail & Accessories: SUS hold Clip C for UQ FLEX AL rail C (LFU-PT-C)(5pcs/ 1bag)	Attachments for rail & Accessories: Joint plate for UQ FLEX AL rail C (LFU-PT-D)(1pc/ 1bag)

The specifications and prices are subject to change without prior notice. Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body		Diffuser	
2	Lead wire			
3	Connector			
4	Aluminium mounting rail C	Aluminum		
5	SUS hold Clip C	Aluminum		
6	Joint plate	SUS		
7	Mounting clip B	SUS		
8	Power supply cable		Red+, Black-	
9	Connector cap			
10	Joint cable			

Spec	Input voltage: DC24V	Light Source color :	Daylight white	: D	: 6500K	Model No.	LFUAY -T- <u>Length</u> SB - <u>Light source color</u> - DF -O - <u>Wattage</u>		
Wattage: _ W/m (Refer to appendix)			Natural white	: N	: 5000K		0050 1050	D: 6500K	5: 5.9 W/m
Max. length per circuit: 10m Max. fitting length: 2m			White	: W	: 4000K		0100 1100	N: 5000K	9: 9.9 W / m
Environment : In & Outdoor, IP67			Warm white 3500K	: WW	: 3500K		0150 1150	W: 4000K	14: 14.9 W / m
Operating temperature : -5°C~+45°C			Warm white 3000K	: L30	: 3000K		0200 1200	WW: 3500K	19: 19.8 W / m
Accessories :Aluminium mounting rail C type950,			Warm white 2700K	: L27	: 2700K		0250 1250	L30: 3000K	
Mounting clip B (5pcs/1bag),			Warm white 2500K	: L25	: 2500K		0300 1300	L27: 2700K	
SUS hold Clip C (5pcs/1bag),Joint plate (1pcs/1bag),		Warm white 2200K	: L22	: 2200K	0350 1350	L25: 2500K			
Power supply cable 10M,Joint cable 1000mm		Warm white 2000K	: L20	: 2000K	0400 1400	L22: 2200K			
		Warm white 1800K	: L18	: 1800K	0450 1450	L20: 2000K			
					0500 1500	L18: 1800K			
					0550 1550				
					0600 1600				
					0650 1650				
					0700 1700				
					0750 1750				
					0800 1800				
					0850 1850				
					0900 1900				
					0950 1950				
					1000 2000				


Job/Project Name	Area/Location/Circuit No.	
Product Code	Qty.	Length(mm)

Luci SHIN UQ FLEX *α* IP67


Luci SHIN UQ FLEX α IP67 (Outdoor) (One end lead , wire - Side feed)

Luci Pte., Ltd.


2025.01.27

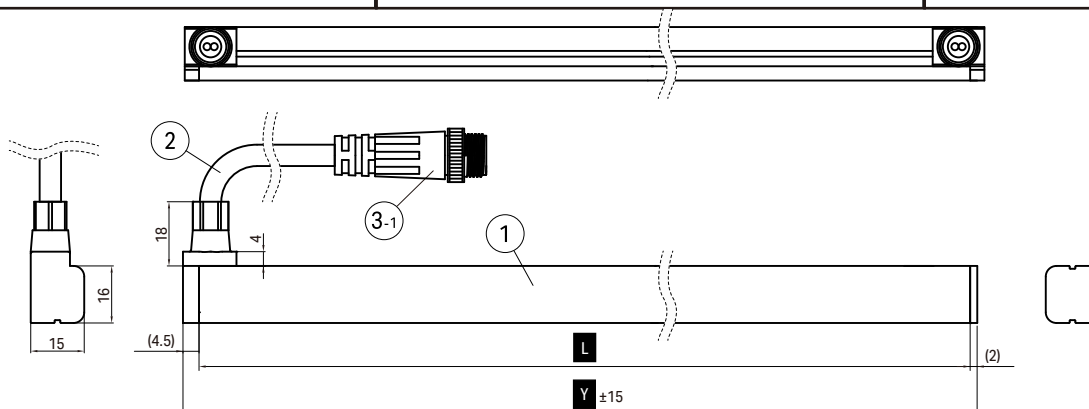


Accessories :
Mounting clip B for UQ FLEX
(LFU-RC-B) (5pcs /1bag)




Accessories:
Power supply cable 10M for UQ FLEX
(CAD-V010M-FPNN-Q)

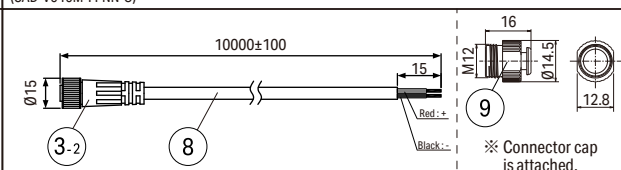


Accessories:
Joint cable 1M for UQ FLEX
(CAD-1000-MPEP-0)

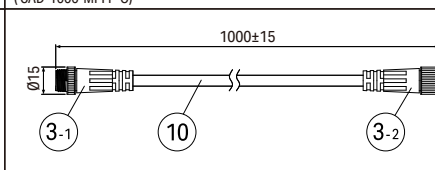


Accessories:
Aluminium mounting rail C type950 for UQ FLEX H13
(LFU-RI 0950-AL-C)

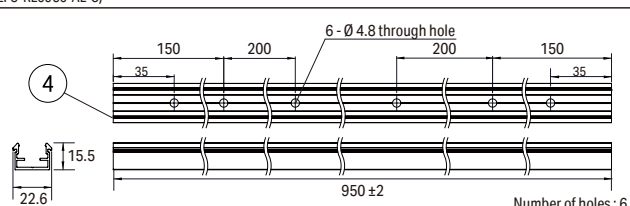

Attachments for rail & Accessories :
SUS hold Clip C for UQ FLEX AL rail C
(LFU-PT-C)(5pcs/ 1bag)



Attachments for rail & Accessories :
Joint plate for UQ FLEX AL rail C
(LFU-PT-D)(1pc/ 1bag)



The specifications and prices are subject to change without prior notice. Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body		Diffuser	
2	Lead wire			
3	Connector			
4	Aluminium mounting rail C	Aluminum		
5	SUS hold Clip C	Aluminum		
6	Joint plate	SUS		
7	Mounting clip B	SUS		
8	Power supply cable		Red+, Black-	
9	Connector cap			
10	Joint cable			

Spec	Input voltage : DC24V	Light Source color : Daylight white : D : 6500K Natural white : N : 5000K White : W : 4000K Warm white 3500K : WW : 3500K Warm white 3000K : L30 : 3000K Warm white 2700K : L27 : 2700K Warm white 2500K : L25 : 2500K Warm white 2200K : L22 : 2200K Warm white 2000K : L20 : 2000K Warm white 1800K : L18 : 1800K	Model No.	
	Wattage : _ W/m (Refer to appendix)		LFUAY-T1LengthSR- Light source color -DF-O- Wattage	
	Max. length per circuit : 10m Max. fitting length : 2m		0050 1050 D:6500K 5:5.9 W/m	
	Environment : In & Outdoor, IP67		0100 1100 N:5000K 9:9.9 W/m	
	Operating temperature : -5℃～+45℃		0150 1150 W:4000K 14:14.9 W/m	
	Aluminium mounting rail C type950,		0200 1200 WW:3500K 19:19.8 W/m	
	Mounting clip B (5pcs/1bag),		0300 1300 L30:3000K	
	SUS hold Clip C (5pcs/1bag),Joint plate (1pcs/1bag),		0350 1350 L27:2700K	
	Power supply cable 10M,Joint cable 1000mm		0400 1400 L25:2500K	
			0450 1450 L22:2200K	
		0500 1500 L20:2000K		
		0550 1550 L18:1800K		
		0600 1600		
		0650 1650		
		0700 1700		
		0750 1750		
		0800 1800		
		0850 1850		
		0900 1900		
		0950 1950		
		1000 2000		

Job/Project Name	Area/Location/Circuit No.	
Product Code	Qty.	Length(mm)

Luci Pte. Ltd.

<http://www.luci.co.jp>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410

Hong Kong Marketing Office
Tel: +852-2219-8462

Korea Office
Tel: +82-2-508-2541


Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / E-mail: info@luci.co.jp

UQ series

Luci SHIN UQ FLEX α IP67Luci SHIN UQ FLEX α IP67 (Outdoor) (One wnd lead , wire - Straight feed)

Luci Pte., Ltd.

2025.01.27

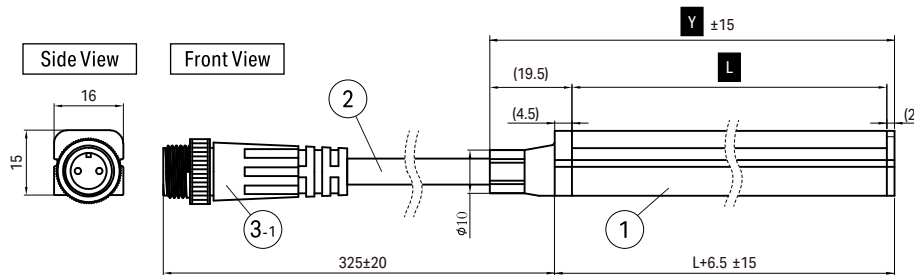

Accessories: Mounting clip B for UQ FLEX (LFU-RC-B) (5pcs/1bag)	Accessories: Power supply cable 10M for UQ FLEX (CAD-VO10M-FPNN-O)	Accessories: Joint cable 1M for UQ FLEX (CAD-1000-MPFF-O)
Accessories: Aluminium mounting rail C type950 for UQ FLEX H13 (LFU-RL0950-AL-C)	Attachments for rail & Accessories: SUS hold Clip C for UQ FLEX AL rail C (LFU-PT-C)(5pcs/1bag)	Attachments for rail & Accessories: Joint plate for UQ FLEX AL rail C (LFU-PT-D)(1pc/1bag)

The specifications and prices are subject to change without prior notice. Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body		Diffuser	
2 Lead wire			
3 Connector			
4 Aluminium mounting rail C	Aluminum		
5 SUS hold Clip C	Aluminum		
6 Joint plate	SUS		
7 Mounting clip B	SUS		
8 Power supply cable		Red+, Black-	
9 Connector cap			
10 Joint cable			

Spec Input voltage : DC24V	Model No.
Wattage : _ W/m (Refer to appendix)	LFUAY - T [Length] SS - [Light source color] - DF - O - [Wattage]
Max. length per circuit : 10m Max. fitting length : 2m	0050 1050 D : 6500K 5 : 5.9 W/m 0100 1100 N : 5000K 9 : 9.9 W/m 0150 1150 W : 4000K 14 : 14.9 W/m 0200 1200 WW : 3500K 19 : 19.8 W/m 0250 1250 L30 : 3000K 0300 1300 L27 : 2700K 0350 1350 L25 : 2500K 0400 1400 L22 : 2200K 0450 1450 L20 : 2000K 0500 1500 L18 : 1800K 0550 1550 0600 1600 0650 1650 0700 1700 0750 1750 0800 1800 0850 1850 0900 1900 0950 1950 1000 2000
Environment : In & Outdoor, IP67	
Operating temperature : -5°C ~ +45°C	
Aluminium mounting rail C type950,	
Mounting clip B (5pcs/1bag),	
SUS hold Clip C (5pcs/1bag), Joint plate (1pcs/1bag),	
Power supply cable 10M, Joint cable 1000mm	

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)


Luci Pte. Ltd. Singapore World HQ Tel : +65-6291-2410	http://www.luci.co.jp Hong Kong Marketing Office Tel : +852-2219-8462	E-mail: info@luci.co.jp Korea Office Tel : +82-2-508-2541	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD. Shanghai China mainland Regional HQ Tel : +86-21-5238-9115 / E-mail: info@luci.co.jp
--	---	---	---

UQ series

Luci SHIN UQ FLEX α IP67Luci SHIN UQ FLEX α IP67 (Outdoor) (Both ends lead, wire - Back feed)

Luci Pte., Ltd.

2025.01.27

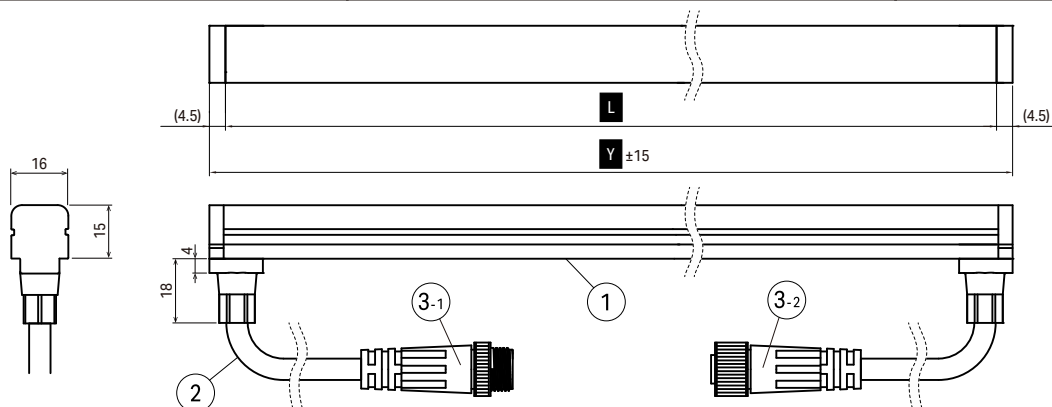

Accessories: Mounting clip B for UQ FLEX (LFU-RC-B) (5pcs/1bag)	Accessories: Power supply cable 10M for UQ FLEX (CAD-V010M-FPNN-O)	Accessories: Joint cable 1M for UQ FLEX (CAD-1000-MPFP-O)
Accessories: Aluminium mounting rail C type950 for UQ FLEX H13 (LFU-RL0950-AL-C)	Attachments for rail & Accessories: SUS hold Clip C for UQ FLEX AL rail C (LFU-PT-C)(5pcs/1bag)	Attachments for rail & Accessories: Joint plate for UQ FLEX AL rail C (LFU-PT-D)(1pc/1bag)

The specifications and prices are subject to change without prior notice. Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body		Diffuser	
2 Lead wire			
3 Connector			
4 Aluminium mounting rail C	Aluminum		
5 SUS hold Clip C	Aluminum		
6 Joint plate	SUS		
7 Mounting clip B	SUS		
8 Power supply cable		Red+, Black-	
9 Connector cap			
10 Joint cable			

Spec	Model No.
Input voltage : DC24V	LFUAY - T [Length] WB - [Light source color] - DF - O - [Wattage]
Wattage : _ W/m (Refer to appendix)	0050 1050 D : 6500K 5 : 5.9 W/m
Max. length per circuit : 10m Max. fitting length : 2m	0100 1100 N : 5000K 9 : 9.9 W/m
Environment : In & Outdoor, IP67	0150 1150 W : 4000K 14 : 14.9 W/m
Operating temperature : -5°C ~ +45°C	0200 1200 WW : 3500K 19 : 19.8 W/m
Aluminium mounting rail C type950,	0250 1250 L30 : 3000K
Mounting clip B (5pcs/1bag),	0300 1300 L27 : 2700K
SUS hold Clip C (5pcs/1bag), Joint plate (1pcs/1bag),	0350 1350 L25 : 2500K
Power supply cable 10M, Joint cable 1000mm	0400 1400 L22 : 2200K
	0450 1450 L20 : 2000K
	0500 1500 L18 : 1800K
	0550 1550
	0600 1600
	0650 1650
	0700 1700
	0750 1750
	0800 1800
	0850 1850
	0900 1900
	0950 1950
	1000 2000

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd.

http://www.luci.co.jp

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.


Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / E-mail: info@luci.co.jp

UQ series

Luci SHIN UQ FLEX α IP67Luci SHIN UQ FLEX α IP67 (Outdoor) (Both wnds lead, wire - Side feed)

Luci Pte., Ltd.

2025.01.27

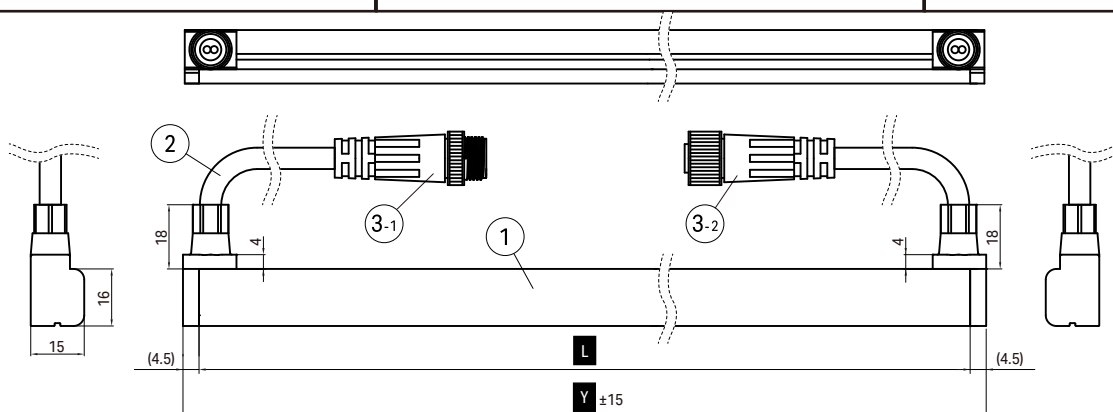

Accessories: Mounting clip B for UQ FLEX (LFU-RC-B) (5pcs/1bag)	Accessories: Power supply cable 10M for UQ FLEX (CAD-V010M-FPNN-O)	Accessories: Joint cable 1M for UQ FLEX (CAD-1000-MPFP-O)

The specifications and prices are subject to change without prior notice. Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body		Diffuser	
2 Lead wire			
3 Connector			
4 Aluminium mounting rail C	Aluminum		
5 SUS hold Clip C	Aluminum		
6 Joint plate	SUS		
7 Mounting clip B	SUS		
8 Power supply cable		Red+, Black-	
9 Connector cap			
10 Joint cable			

Spec	Input voltage : DC24V	Light Source color :	Daylight white : D : 6500K	Model No.
	Wattage : _ W/m (Refer to appendix)		Natural white : N : 5000K	LFUAY -T- Length SS - Light source color - DF - O - Wattage
	Max. length per circuit : 10m Max. fitting length : 2m		White : W : 4000K	0050 1050 D : 6500K 5 : 5.9 W/m
	Environment : In & Outdoor, IP67		Warm white 3500K : WW : 3500K	0100 1100 N : 5000K 9 : 9.9 W/m
	Operating temperature : -5°C ~ +45°C		Warm white 3000K : L30 : 3000K	0150 1150 W : 4000K 14 : 14.9 W/m
	Aluminium mounting rail C type950,		Warm white 2700K : L27 : 2700K	0200 1200 WW : 3500K 19 : 19.8 W/m
	Mounting clip B (5pcs/1bag),		Warm white 2500K : L25 : 2500K	0250 1250 L30 : 3000K
	SUS hold Clip C (5pcs/1bag), Joint plate (1pcs/1bag),		Warm white 2200K : L22 : 2200K	0300 1300 L27 : 2700K
	Power supply cable 10M, Joint cable 1000mm		Warm white 2000K : L20 : 2000K	0350 1350 L25 : 2500K
			Warm white 1800K : L18 : 1800K	0400 1400 L22 : 2200K
				0450 1450 L20 : 2000K
				0500 1500 L18 : 1800K
				0550 1550
				0600 1600
				0650 1650
				0700 1700
				0750 1750
				0800 1800
				0850 1850
				0900 1900
				0950 1950
				1000 2000


Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)
Luci Pte. Ltd.	http://www.luci.co.jp
Singapore World HQ	Hong Kong Marketing Office
Tel: +65-6291-2410	Tel: +852-2219-8462
E-mail: info@luci.co.jp	Korea Office
	Tel: +82-2-508-2541
LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.	Shanghai China mainland Regional HQ
	Tel: +86-21-5238-9115 / E-mail: info@luci.co.jp

UQ series

Luci SHIN UQ FLEX α IP67Luci SHIN UQ FLEX α IP67 (Outdoor) (Both wnds lead , wire - Straight feed)

Luci Pte., Ltd.

2025.01.27

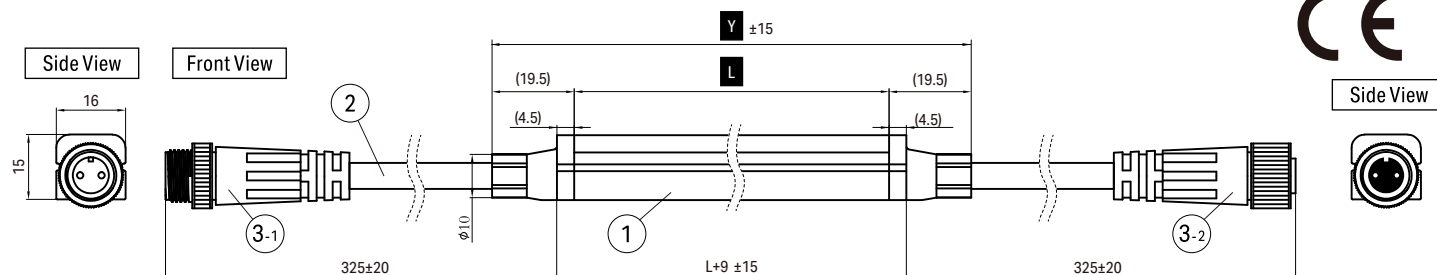

Accessories : Mounting clip B for UQ FLEX (LFU-RC-B) (5pcs / 1bag)	Accessories : Power supply cable 10M for UQ FLEX (CAD-V010M-FPNN-O)	Accessories : Joint cable 1M for UQ FLEX (CAD-1000-MPFF-O)
Accessories : Aluminium mounting rail C type950 for UQ FLEX H13 (LFU-RL0950-AL-C)	Attachments for rail & Accessories : SUS hold Clip C for UQ FLEX AL rail C (LFU-PT-C)(5pcs/ 1bag)	Attachments for rail & Accessories : Joint plate for UQ FLEX AL rail C (LFU-PT-D)(1pc/ 1bag)

The specifications and prices are subject to change without prior notice. Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body		Diffuser	
2	Lead wire			
3	Connector			
4	Aluminium mounting rail C	Aluminum		
5	SUS hold Clip C	Aluminum		
6	Joint plate	SUS		
7	Mounting clip B	SUS		
8	Power supply cable		Red+, Black-	
9	Connector cap			
10	Joint cable			

Spec	Input voltage : DC24V	Light Source color	Daylight white : D : 6500K	Model No.
	Wattage : _ W/m (Refer to appendix)		Natural white : N : 5000K	LFUAY - T [Length] WS - [Light source color] - DF - O [Wattage]
	Max. length per circuit : 10m Max. fitting length : 2m		White : W : 4000K	0050 1050 D : 6500K 5 : 5.9 W / m
	Environment : In & Outdoor, IP67		Warm white 3500K : WW : 3500K	0100 1100 N : 5000K 9 : 9.9 W / m
	Operating temperature : -5°C ~ +45°C		Warm white 3000K : L30 : 3000K	0150 1150 W : 4000K 14 : 14.9 W / m
	Aluminium mounting rail C type950,		Warm white 2700K : L27 : 2700K	0200 1200 WW : 3500K 19 : 19.8 W / m
	Mounting clip B (5pcs/1bag),		Warm white 2500K : L25 : 2500K	0250 1250 L30 : 3000K
	SUS hold Clip C (5pcs/1bag), Joint plate (1pcs/1bag),		Warm white 2200K : L22 : 2200K	0300 1300 L27 : 2700K
	Power supply cable 10M, Joint cable 1000mm		Warm white 2000K : L20 : 2000K	0350 1350 L25 : 2500K
			Warm white 1800K : L18 : 1800K	0400 1400 L22 : 2200K

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)

Luci Pte. Ltd.	http://www.luci.co.jp	E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ Tel: +65-6291-2410	Hong Kong Marketing Office Tel: +852-2219-8462	Korea Office Tel: +82-2-508-2541	Shanghai China mainland Regional HQ Tel: +86-21-5238-9115 / E-mail: info@luci.co.jp

Specifications [LFUY - O]

LFUAY - Length** - Light source color - DF- O - Wattage

Specifications by length

Length	Fitting length (L)				Wattage			
	WR/WB	SR/SB	WS	SS	5 : 5.9W/m	9 : 9.9W/m	14 : 14.9W/m	19 : 19.8W/m
0050	59.0mm	56.5mm	89.0mm	71.5mm	0.3W	0.5W	0.7W	1.0W
0100	109.0mm	106.5mm	139.0mm	121.5mm	0.6W	1.0W	1.5W	2.0W
0150	159.0mm	156.5mm	189.0mm	171.5mm	0.9W	1.5W	2.2W	3.0W
0200	209.0mm	206.5mm	239.0mm	221.5mm	1.2W	2.0W	3.0W	4.0W
0250	259.0mm	256.5mm	289.0mm	271.5mm	1.5W	2.5W	3.7W	5.0W
0300	309.0mm	306.5mm	339.0mm	321.5mm	1.8W	3.0W	4.5W	5.9W
0350	359.0mm	356.5mm	389.0mm	371.5mm	2.1W	3.5W	5.2W	6.9W
0400	409.0mm	406.5mm	439.0mm	421.5mm	2.4W	4.0W	5.9W	7.9W
0450	459.0mm	456.5mm	489.0mm	471.5mm	2.7W	4.5W	6.7W	8.9W
0500	509.0mm	506.5mm	539.0mm	521.5mm	3.0W	5.0W	7.4W	9.9W
0550	559.0mm	556.5mm	589.0mm	571.5mm	3.3W	5.4W	8.2W	10.9W
0600	609.0mm	606.5mm	639.0mm	621.5mm	3.6W	5.9W	8.9W	11.9W
0650	659.0mm	656.5mm	689.0mm	671.5mm	3.9W	6.4W	9.7W	12.9W
0700	709.0mm	706.5mm	739.0mm	721.5mm	4.2W	6.9W	10.4W	13.9W
0750	759.0mm	756.5mm	789.0mm	771.5mm	4.5W	7.4W	11.1W	14.9W
0800	809.0mm	806.5mm	839.0mm	821.5mm	4.8W	7.9W	11.9W	15.8W
0850	859.0mm	856.5mm	889.0mm	871.5mm	5.0W	8.4W	12.6W	16.8W
0900	909.0mm	906.5mm	939.0mm	921.5mm	5.3W	8.9W	13.4W	17.8W
0950	959.0mm	956.5mm	989.0mm	971.5mm	5.6W	9.4W	14.1W	18.8W
1000	1009.0mm	1006.5mm	1039.0mm	1021.5mm	5.9W	9.9W	14.9W	19.8W
1050	1059.0mm	1056.5mm	1089.0mm	1071.5mm	6.2W	10.4W	15.6W	20.8W
1100	1109.0mm	1106.5mm	1139.0mm	1121.5mm	6.5W	10.9W	16.3W	21.8W
1150	1159.0mm	1156.5mm	1189.0mm	1171.5mm	6.8W	11.4W	17.1W	22.8W
1200	1209.0mm	1206.5mm	1239.0mm	1221.5mm	7.1W	11.9W	17.8W	23.8W
1250	1259.0mm	1256.5mm	1289.0mm	1271.5mm	7.4W	12.4W	18.6W	24.8W
1300	1309.0mm	1306.5mm	1339.0mm	1321.5mm	7.7W	12.9W	19.3W	25.7W
1350	1359.0mm	1356.5mm	1389.0mm	1371.5mm	8.0W	13.4W	20.0W	26.7W
1400	1409.0mm	1406.5mm	1439.0mm	1421.5mm	8.3W	13.9W	20.8W	27.7W
1450	1459.0mm	1456.5mm	1489.0mm	1471.5mm	8.6W	14.4W	21.5W	28.7W
1500	1509.0mm	1506.5mm	1539.0mm	1521.5mm	8.9W	14.9W	22.3W	29.7W
1550	1559.0mm	1556.5mm	1589.0mm	1571.5mm	9.2W	15.3W	23.0W	30.7W
1600	1609.0mm	1606.5mm	1639.0mm	1621.5mm	9.5W	15.8W	23.8W	31.7W
1650	1659.0mm	1656.5mm	1689.0mm	1671.5mm	9.8W	16.3W	24.5W	32.7W
1700	1709.0mm	1706.5mm	1739.0mm	1721.5mm	10.1W	16.8W	25.2W	33.7W
1750	1759.0mm	1756.5mm	1789.0mm	1771.5mm	10.4W	17.3W	26.0W	34.7W
1800	1809.0mm	1806.5mm	1839.0mm	1821.5mm	10.7W	17.8W	26.7W	35.6W
1850	1859.0mm	1856.5mm	1889.0mm	1871.5mm	11.0W	18.3W	27.5W	36.6W
1900	1909.0mm	1906.5mm	1939.0mm	1921.5mm	11.3W	18.8W	28.2W	37.6W
1950	1959.0mm	1956.5mm	1989.0mm	1971.5mm	11.6W	19.3W	29.0W	38.6W
2000	2009.0mm	2006.5mm	2039.0mm	2021.5mm	11.9W	19.8W	29.7W	39.6W

Photometry characterristic

Wattage 5 : 5.9W/m										
Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18
Luminous flux	428lm	424lm	416lm	412lm	401lm	378lm	280lm	261lm	238lm	231lm/m
Luminaire efficiency	72.1lm/W	71.4lm/W	70.0lm/W	69.4lm/W	67.5lm/W	63.6lm/W	47.1lm/W	43.9lm/W	40.1lm/W	38.9lm/W

Wattage 9 : 9.9W/m										
Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18
Luminous flux	718lm	712lm	699lm	693lm	674lm	636lm	470lm	439lm	400lm	388lm/m
Luminaire efficiency	72.5lm/W	71.9lm/W	70.6lm/W	70.0lm/W	68.1lm/W	64.2lm/W	47.5lm/W	44.3lm/W	40.4lm/W	39.2lm/W

Wattage 14 : 14.9W/m										
Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18
Luminous flux	1050lm	1041lm	1023lm	1013lm	985lm	930lm	688lm	641lm	586lm	567lm/m
Luminaire efficiency	70.7lm/W	70.1lm/W	68.9lm/W	68.2lm/W	66.3lm/W	62.6lm/W	46.3lm/W	43.2lm/W	39.4lm/W	38.2lm/W

Wattage 19 : 19.8W/m										
Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18
Luminous flux	1369lm	1357lm	1333lm	1321lm	1284lm	1212lm	897lm	836lm	763lm	739lm/m
Luminaire efficiency	69.1lm/W	68.5lm/W	67.3lm/W	66.7lm/W	64.8lm/W	61.2lm/W	45.3lm/W	42.2lm/W	38.6lm/W	37.3lm/W

Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18
CRI	Ra96	Ra93	Ra97	Ra97	Ra95	Ra94	Ra94	Ra93	Ra91	Ra90

The values are measured values, not guaranteed values.