
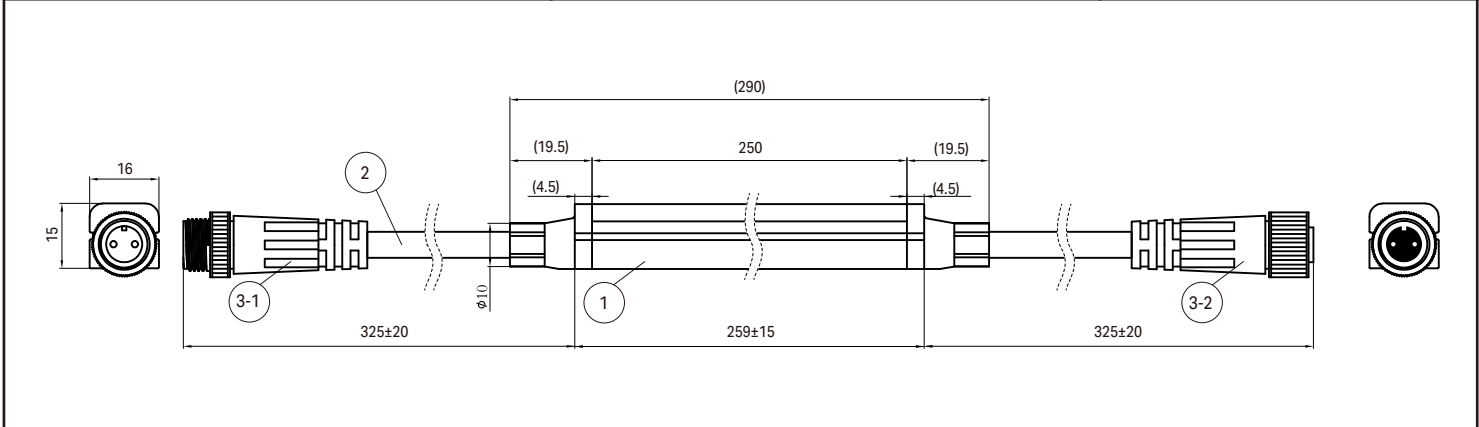

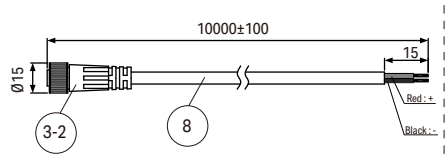
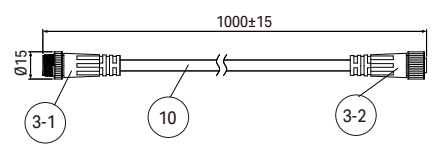
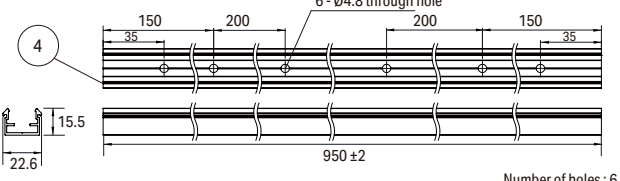






Option parts : Mounting clip B for UQ FLEX (LFU-RC-B)(5pcs/1bag)	Option parts Power supply cable 10M for UQ FLEX (CAD-V010M-FPNN-O)	Option parts: Joint cable 1M for UQ FLEX (CAD-1000-MPFP-O)
		

Released in May 2020	Option parts: Aluminum mounting rail C type950 for UQ FLEX H13 (LFU-RL0950-AL-C)	Accessories for rail & Option parts: SUS hold Clip C for UQ FLEX AL rail C (LFU-PT-C)(5pcs/ 1bag)	Accessories for rail & Option parts: Joint plate for UQ FLEX AL rail C (LFU-PT-D)(5pcs/ 1bag)
			

Spec • Rating may be subject to change without announcements.

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body		Diffuser	
2	Lead wire			
3-1	Connector			
3-2	Connector			
4	Aluminum mounting rail C type	Aluminum		
5	SUS hold clip C	SUS		
6	Joint plate	SUS		
7	Mounting clip B	SUS		
8	Power supply cable			
9	Connector cap		Red+, Black-	
10	Joint cable			

Spec	Input voltage : DC24V	Light Source color :	Item Number
	Wattage : 1.2W Max. length per circuit : 5m	Warm white 2700K : L27 : 2700K	LFUS-T0250WS-L27-DF-O
	Environment : In & Outdoor, IP67 Humidity up to 95%RH	L27 actual measured value : 2660K	
	Operating temperature : 0℃~+100℃		
	Accessories : Mounting Clip B for UQ FLEX,		
	Aluminum Mounting rail C Type950 for UQ FLEX H13,		
	SUS hold Clip C for UQ FLEX AL rail C,		
	Joint plate for UQ FLEX AL rail C,		
	Joint cable1M for UQ FLEX,		
	Power supply cable 10M for UQ FLEX (Connector cap is attached)		


Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)

Luci UQ FLEX SAUNA



Luci

2024.05.25

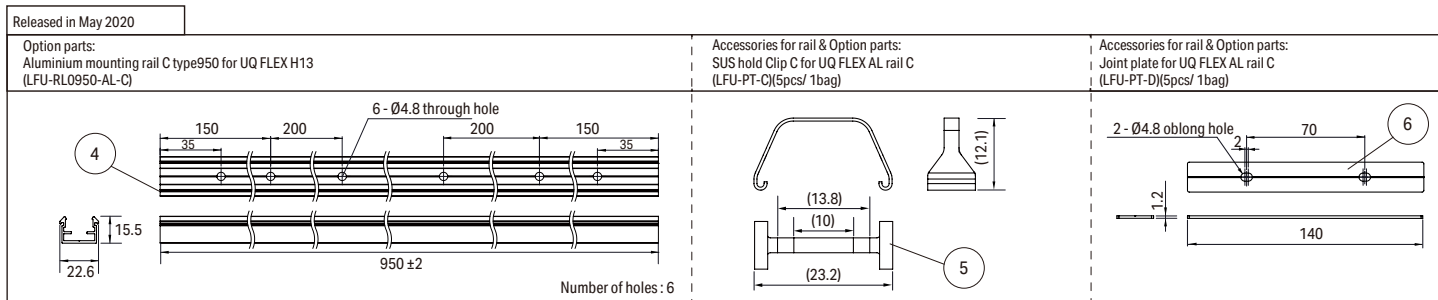

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body		Diffuser	
2	Lead wire			
3-1	Connector			
3-2	Connector			
4	Aluminum mounting rail C type	Aluminum		
5	SUS hold clip C	SUS		
6	Joint plate	SUS		
7	Mounting clip B	SUS		
8	Power supply cable			
9	Connector cap		Red+, Black-	
10	Joint cable			

Spec	Input voltage : DC24V	Light Source color :	Item Number
	Wattage : 2.3W Max. length per circuit : 5m	Warm white 2700K : L27 : 2700K	LFUS-T0500WS-L27-DF-O
	Environment : In & Outdoor, IP67 Humidity up to 95%RH	L27 actual measured value : 2660K	
	Operating temperature : 0℃ ~ +100℃		
	Accessories : Mounting Clip B for UQ FLEX,		
	Aluminum Mounting rail C Type 950 for UQ FLEX H13,		
	SUS hold Clip C for UQ FLEX AL rail C,		
	Joint plate for UQ FLEX AL rail C,		
	Joint cable 1M for UQ FLEX,		
	Power supply cable 10M for UQ FLEX (Connector cap is attached)		


Job/Project Name		Area/Location/Circuit No.	
Product Code		Qty.	Length(mm)




LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.




Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@

luci.co.jp

UQ series	Luci UQ FLEX SAUNA	
Luci UQ FLEX SAUNA 1000 (Both lead wire-Straight feed)		
Luci Pte., Ltd.	2024.05.25	

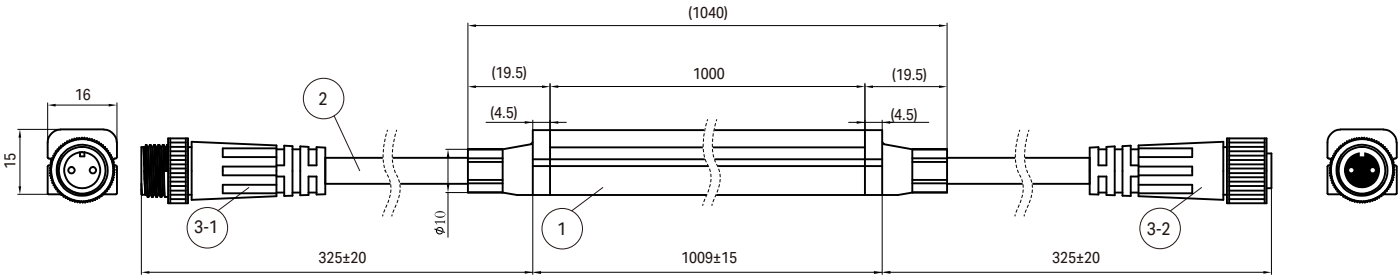


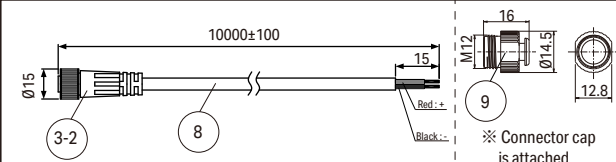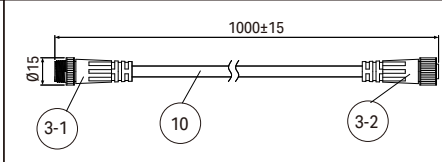Option parts : Mounting clip B for UQ FLEX (LFU-RC-B) (5pcs/ 1bag)	Option parts Power supply cable 10M for UQ FLEX (CAD-V010M-FPNN-O)	Option parts: Joint cable 1M for UQ FLEX (CAD-1000-MPPF-O)
		

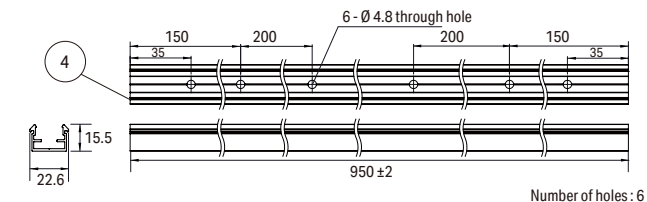Released in May 2020	Option parts: Aluminum mounting rail C type950 for UQ FLEX H13 (LFU-RL0950-AL-C)	Accessories for rail & Option parts: SUS hold Clip C for UQ FLEX AL rail C (LFU-PT-C)(5pcs/ 1bag)	Accessories for rail & Option parts: Joint plate for UQ FLEX AL rail C (LFU-PT-D)(5pcs/ 1bag)
			

Spec • Rating may be subject to change without announcements.

Unit Of Measure : mm

Part Name		Material	Note	Drawing
1	Body		Diffuser	
2	Lead wire			
3-1	Connector			
3-2	Connector			
4	Aluminum mounting rail C type	Aluminum		
5	SUS hold clip C	SUS		
6	Joint plate	SUS		
7	Mounting clip B	SUS		
8	Power supply cable			
9	Connector cap		Red+, Black-	
10	Joint cable			
Spec	Input voltage : DC24V		Light Source color :	Item Number
	Wattage : 4.6W Max. length per circuit : 5m		Warm white 2700K : L27 : 2700K	LFUS-T1000WS-L27-DF-O
	Environment : In & Outdoor, IP67 Humidity up to 95%RH		L27 actual measured value : 2660K	
	Operating temperature : 0℃～+100℃			
	Accessories: Mounting Clip B for UQ FLEX,			
	Aluminum Mounting rail C Type 950 for UQ FLEX H13,			
	SUS hold Clip C for UQ FLEX AL rail C,			
	Joint plate for UQ FLEX AL rail C,			
	Joint cable 1M for UQ FLEX,			
	Power supply cable 10M for UQ FLEX (Connector cap is attached)			
Job/Project Name			Area/Location/Circuit No.	
Product Code			Qty. Length(mm)	
Luci Pte. Ltd.			LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.	
http://www.luci.co.jp				
E-mail: info@ luci.co.jp				
Singapore World HQ			Shanghai China mainland Regional HQ	
Tel: +65-6291-2410			Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@	
Hong Kong Marketing Office			luci.co.jp	
Tel: +852-2219-8462 / Fax: +852-2219-8461				
Korea Office				
Tel: +82-2-508-2541				

UQ series


Luci UQ FLEX SAUNA

Luci UQ FLEX SAUNA Custom order products (Both lead wire-Straight feed)



Luci Pte., Ltd.

2024.05.25

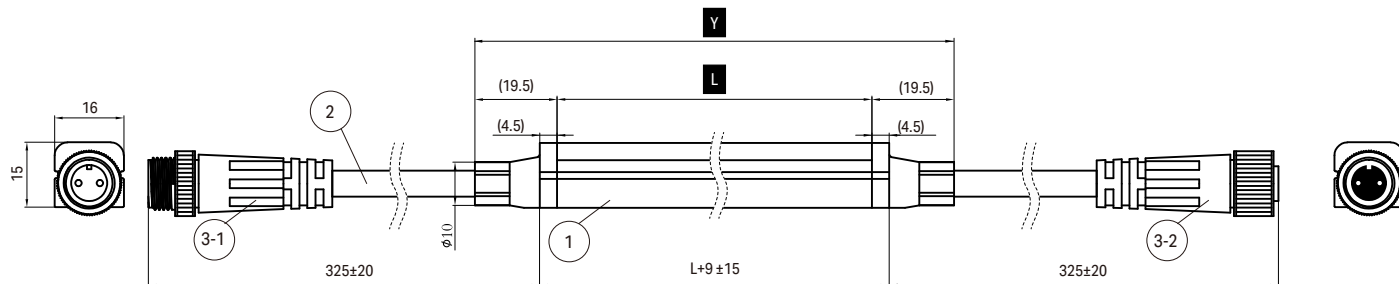

Option parts: Mounting clip B for UQ FLEX (LFU-RC-B) (5pcs/1bag)	Option parts: Power supply cable 10M for UQ FLEX (CAD-V010M-FPNN-O)	Option parts: Joint cable 1M for UQ FLEX (CAD-1000-MPFP-O)

Released in May 2020

Option parts: Aluminum mounting rail C type950 for UQ FLEX H13 (LFU-RL0950-AL-C)	Accessories for rail & Option parts: SUS hold Clip C for UQ FLEX AL rail C (LFU-PT-C)(5pcs/ 1bag)	Accessories for rail & Option parts: Joint plate for UQ FLEX AL rail C (LFU-PT-D)(5pcs/ 1bag)

Spec • Rating may be subject to change without announcements.


Unit Of Measure : mm


	Part Name	Material	Note	Drawing
1	Body		Diffuser	
2	Lead wire			
3-1	Connector			
3-2	Connector			
4	Aluminum mounting rail C type	Aluminum		
5	SUS hold clip C	SUS		
6	Joint plate	SUS		
7	Mounting clip B	SUS		
8	Power supply cable			
9	Connector cap		Red+, Black-	
10	Joint cable			

Spec	Input voltage : DC24V	Light Source color :	Item Number
	Wattage : 4.6W/m Max. length per circuit : 5m	Warm white 2700K : L27 : 2700K	LFUS-T**WS-L27-DF-O
	Environment : In & Outdoor, IP67 Humidity up to 95%RH	L27 actual measured value : 2660K	
	Operating temperature : 0℃~+100℃		
	Accessories : Mounting Clip B for UQ FLEX,		
	Aluminum Mounting rail C Type950 for UQ FLEX H13,		
	SUS hold Clip C for UQ FLEX AL rail C,		
	Joint plate for UQ FLEX AL rail C,		
	Joint cable 1M for UQ FLEX,		
	Power supply cable 10M for UQ FLEX (Connector cap is attached)		



Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)

Luci Pte. Ltd.	http://www.luci.co.jp	E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ	Hong Kong Marketing Office	Korea Office	Shanghai China mainland Regional HQ
Tel: +65-6291-2410	Tel: +852-2219-8462 / Fax: +852-2219-8461	Tel: +82-2-508-2541	Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

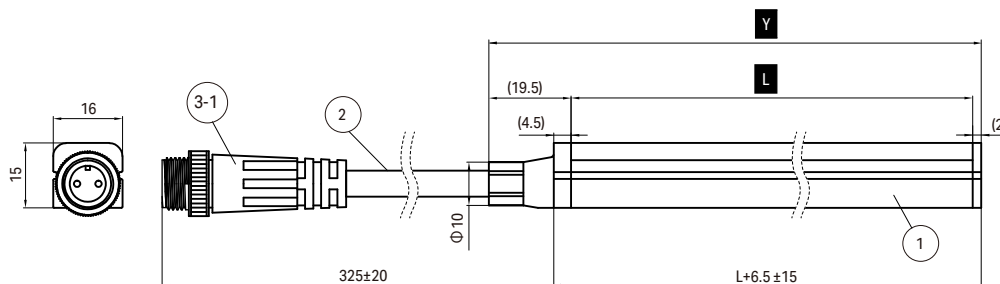

Option parts : Mounting clip B for UQ FLEX (LFU-RC-B) (5pcs /1bag) 	Option parts Power supply cable 10M for UQ FLEX (CAD-V010M-FPNN-O) 	Option parts: Joint cable 1M for UQ FLEX (CAD-1000-MPPF-O) 
--	---	--

Released in May 2020

Option parts: Aluminium mounting rail C type950 for UQ FLEX H13 (LFU-RL0950-AL-C) 	Accessories for rail & Option parts: SUS hold Clip C for UQ FLEX AL rail C (LFU-PT-C)(5pcs/ 1bag) 	Accessories for rail & Option parts: Joint plate for UQ FLEX AL rail C (LFU-PT-D)(5pcs/ 1bag) 
--	--	---

Spec • Rating may be subject to change without announcements.

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body		Diffuser	
2	Lead wire			
3-1	Connector			
3-2	Connector			
4	Aluminum mounting rail C type	Aluminum		
5	SUS hold clip C	SUS		
6	Joint plate	SUS		
7	Mounting clip B	SUS		
8	Power supply cable			
9	Connector cap		Red+, Black-	
10	Joint cable			

Spec	Input voltage : DC24V	Light Source color :	Item Number
	Wattage : 5.1W/m Max. length per circuit : 5m	Warm white 2700K : L27 : 2700K	LFUS-T**SS-L27-DF-O
	Environment : In & Outdoor, IP67 Humidity up to 95%RH	L27 actual measured value : 2660K	
	Operating temperature : 0℃～+100℃		
	Accessories : Mounting Clip B for UQ FLEX,		
	Aluminum Mounting rail C Type950 for UQ FLEXH13,		
	SUS hold Clip C for UQ FLEX AL rail C,		
	Joint plate for UQ FLEX AL rail C,		
	Joint cable1M for UQ FLEX,		
	Power supply cable 10M for UQ FLEX (Connector cap is attached)		

Job/Project Name	Area/Location/Circuit No.	
Product Code	Qty.	Length(mm)

Luci UQ FLEX SAUNA Custom Order

Model No

LFUS-T Length Cable type S- Light source color -DF-O

Lenght(L)

Refer to “Custom order products size”

Cable type 1

both ends lead wire : W
one end lead wire : S

Cable type 2


Straight feed : S

Light source color


Warm White 2700K 2700K : L27

Dimension

One end lead wire (Model No: SS)

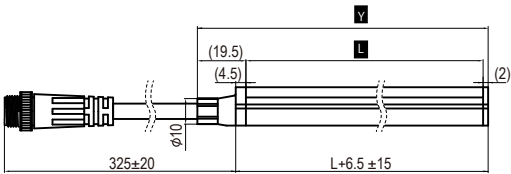

Both ends lead wire (Model No: WS)

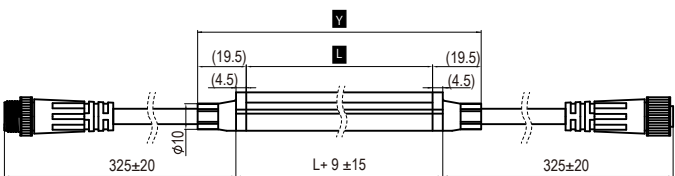

Custom order products size

Model No.	L	Y		Power consumption (W)
		Both ends Straight lead wire (WS)	One end Straight lead wire (SS)	
0250	250	290	272	1.2
0500	500	540	522	2.3
0750	750	790	772	3.5
1000	1000	1040	1022	4.6
1250	1250	1290	1272	5.8
1500	1500	1540	1522	6.9
1750	1750	1790	1772	8.1
2000	2000	2040	2022	9.2
2250	2250	2290	2272	10.4
2500	2500	2540	2522	11.5
2750	2750	2790	2772	12.7
3000	3000	3040	3022	13.8
3250	3250	3290	3272	15.0
3500	3500	3540	3522	16.1
3750	3750	3790	3772	17.3
4000	4000	4040	4022	18.4
4250	4250	4290	4272	19.6
4500	4500	4540	4522	20.7
4750	4750	4790	4772	21.9
5000	5000	5040	5022	23.0