

UQ series

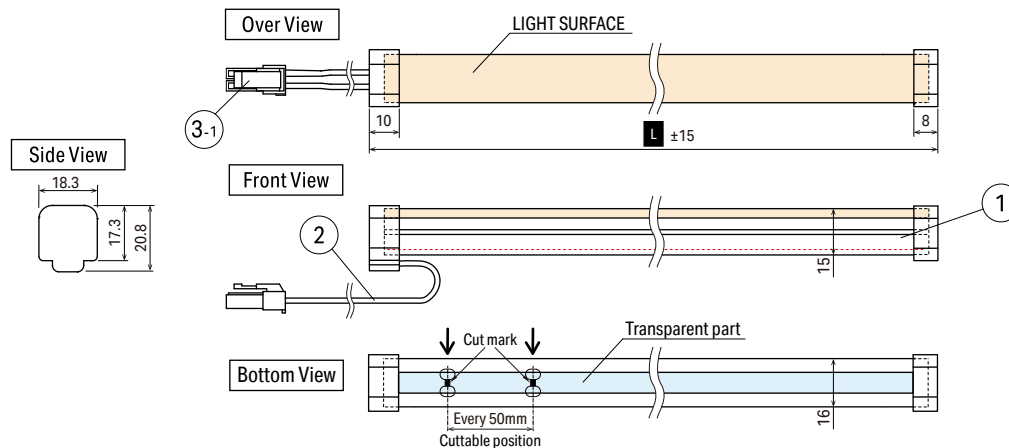
Luci SHIN UQ FLEX

Luci SHIN UQ FLEX (Indoor) (One end lead, wire - Back feed)



Luci Pte., Ltd.

2025.01.27



Accessories: PC Mounting clip for UQ FLEX (LFU-RC) (5pcs/1bag) 30 4.5 15 17 41.5	Accessories: Power supply cable 3000mm for SL connector (CAD-3000-MCNN-I) 3000⁺⁴⁰⁰₀ 3-2 10 ⚠ Check the label on the DC + side for polarity.	Accessories: Joint cable 1000mm/5000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I) L 3-2 10 3-1 <table><thead><tr><th>Model number</th><th>L(mm)</th></tr></thead><tbody><tr><td>CAD-1000-MCFC-I</td><td>1000±15</td></tr><tr><td>CAD-5000-MCFC-I</td><td>5000⁺²⁵⁰₀</td></tr></tbody></table>	Model number	L(mm)	CAD-1000-MCFC-I	1000±15	CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀
Model number	L(mm)							
CAD-1000-MCFC-I	1000±15							
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀							
Accessories: Aluminum mounting rail 950 for UQ FLEX Indoor (LFU-RL0950-AL-C-I) 4 150 200 200 150 35 6- Ø 4.8 through hole 22.6 15.5 950 ±2 Number of holes: 6	Attachment for rail & Accessories: PC hold Clip for UQ FLEX AL rail (LFU-PT-B)(5pcs/ 1bag) 5 25.2 15 14.7	Attachment for rail & Accessories: Joint plate for UQ FLEX AL rail (LFU-PT-E)(1pc/ 1bag) 6 2- Ø 4.8 oblong hole 2 120 17.7 1.2 200						
Accessories: Aluminum mounting parts for UQ FLEX Indoor (LFU-RL0018-AL-C-I) (5 pcs/bag) 8 18 9 Ø 4.8 through hole 22.6 15.5	Attachments for rail & Accessories: PC hold Clip for UQ FLEX AL rail (LFU-PT-B)(5pcs/ 1bag) 5 25.2 15 14.7	Attachment & Accessories: Endcap for UQ FLEX indoor (LFU-EC) (2 pcs/bag) 11 18.3 8 17.3						

Spec • Rating may be subject to change without announcements.

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Silicone	Diffuser	
2 Lead wire			
3 Connector		3-1 3-2	
4 Aluminium mounting rail C	Aluminum		
5 PC hold clip	PC	5-1: Mounting Parts 5-2: Hold clip	
6 Joint plate	SUS		
7 PC Mounting clip	PC		
8 Aluminum mounting Parts	Aluminum		
9 Power supply cable			
10 Joint cable		Red+, Black-	
11 End cap	Silicone		

Spec Input voltage : DC24V Wattage : W/m (Refer to appendix) Max. length per circuit : 5m Environment : Indoor Max. fitting length : 5m Operating temperature : -5°C ~ +45°C Attachments : Endcap Accessories : Aluminum mounting rail 950, Aluminum mounting parts, PC hold Clip, PC Mounting Clip, Joint plate, Endcap, Joint cable 1000mm/5000mm, Power supply cable 3000mm,	Light Source color Daylight white : D : 6500K Natural white : N : 5000K White : W : 4000K Warm white 3500K : WW : 3500K Warm white 3000K : L30 : 3000K Warm white 2700K : L27 : 2700K Warm white 2500K : L25 : 2500K Warm white 2200K : L22 : 2200K Warm white 2000K : L20 : 2000K Warm white 1800K : L18 : 1800K	Model No. LFUY-T[Length]SB-[Light source color]-DF-O-[Wattage] 0100 1000 2100 3100 4100 0150 1150 2150 3150 4150 0200 1200 2200 3200 4200 0250 1250 2250 3250 4250 0300 1300 2300 3300 4300 0350 1350 2350 3350 4350 0400 1400 2400 3400 4400 0450 1450 2450 3450 4450 0500 1500 2500 3500 4500 0550 1550 2550 3550 4550 0600 1600 2600 3600 4600 0650 1650 2650 3650 4650 0700 1700 2700 3700 4700 0750 1750 2750 3750 4750 0800 1800 2800 3800 4800 0850 1850 2850 3850 4850 0900 1900 2900 3900 4900 0950 1950 2950 3950 4950 1000 2000 3000 4000 5000
--	--	--

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)

Luci Pte. Ltd. Singapore World HQ Tel: +65-6291-2410	http://www.luci.co.jp Hong Kong Marketing Office Tel: +852-2219-8462	E-mail: info@luci.co.jp Korea Office Tel: +82-2-508-2541	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD. Shanghai China mainland Regional HQ Tel: +86-21-5238-9115 / E-mail: info@luci.co.jp
---	--	--	--

UQ series

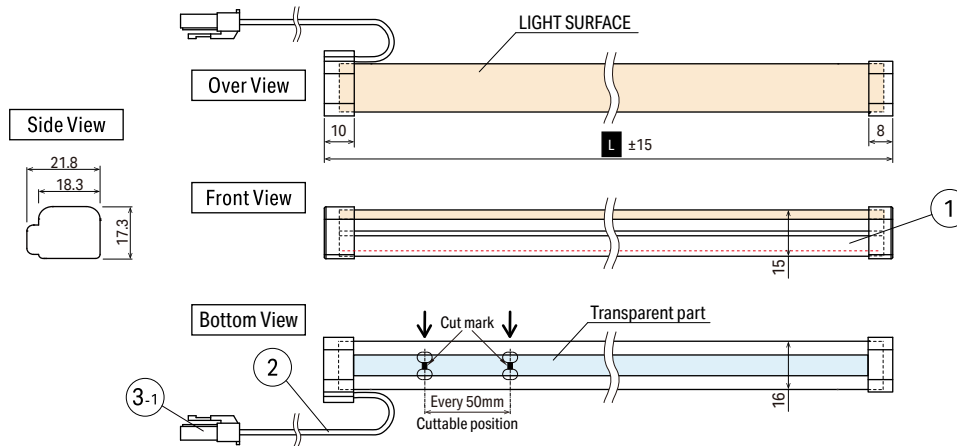
Luci SHIN UQ FLEX



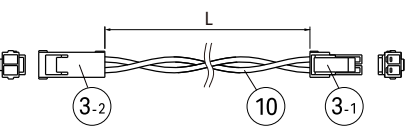
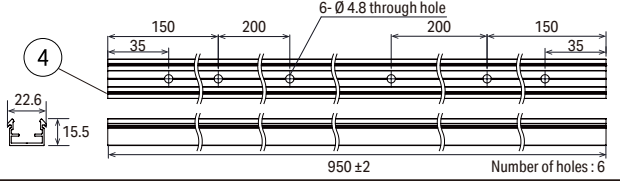

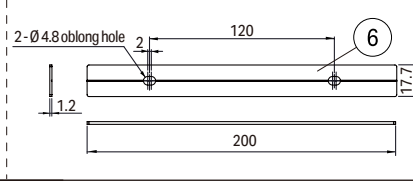



Luci SHIN UQ FLEX (Indoor) (One end lead, wire - Side feed)


Luci

Luci Pte., Ltd.


2025.01.27

Accessories: PC Mounting clip for UQ FLEX (LFU-RC) (5pcs/1bag)		Accessories: Power supply cable 3000mm for SL connector (CAD-3000-MCNC-1)		Accessories: Joint cable 1000mm/5000mm for SL connector (CAD-1000-MCFC-1,CAD-5000-MCFC-1)							
		 Check the label on the DC + side for polarity.		 <table border="1"><thead><tr><th>Model number</th><th>L(mm)</th></tr></thead><tbody><tr><td>CAD-1000-MCFC-1</td><td>1000±15</td></tr><tr><td>CAD-5000-MCFC-1</td><td>5000⁺²⁵⁰₋₀</td></tr></tbody></table>		Model number	L(mm)	CAD-1000-MCFC-1	1000±15	CAD-5000-MCFC-1	5000 ⁺²⁵⁰ ₋₀
Model number	L(mm)										
CAD-1000-MCFC-1	1000±15										
CAD-5000-MCFC-1	5000 ⁺²⁵⁰ ₋₀										
Accessories: Aluminum mounting rail 950 for UQ FLEX Indoor (LFU-RL0950-AL-C-I)		Attachments for rail & Accessories: PC hold Clip for UQ FLEX AL rail (LFU-PT-B)(5pcs/ 1bag)		Attachments for rail & Accessories: Joint plate for UQ FLEX AL rail (LFU-PT-E)(1pc/ 1bag)							
											
Accessories : Aluminum mounting parts for UQ FLEX Indoor (LFU-RL0018-AL-C-I) (5 pcs/bag)		Attachments for rail & Accessories: PC hold Clip for UQ FLEX AL rail (LFU-PT-B)(5pcs/1 bag)		Attachment & Accessories: Endcap for UQ FLEX indoor (LFU-EC) (2 pcs/bag)							
											

Spec • Rating may be subject to change without announcements.

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Silicone	Diffuser	
2 Lead wire			
3 Connector		3-1	
4 Aluminium mounting rail C	Aluminum		
5 PC hold clip	PC	5-1: Mounting Parts 5-2: Hold clip	
6 Joint plate	SUS		
7 PC Mounting clip	PC		
8 Aluminum mounting Parts	Aluminum		
9 Power supply cable			
10 Joint cable		Red+, Black-	
11 End cap	Silicone		

Spec Input voltage : DC24V Wattage : W/m (Refer to appendix) Max. length per circuit : 5m Environment : Indoor Max. fitting length : 5m Operating temperature : -5°C ~ +45°C Attachments : Endcap Accessories : Aluminum mounting rail 950, Aluminum mounting parts, PC hold Clip, PC Mounting Clip, Joint plate, Endcap, Joint cable 1000mm/5000mm, Power supply cable 3000mm,	Light Source color Daylight white : D : 6500K Natural white : N : 5000K White : W : 4000K Warm white 3500K : WW : 3500K Warm white 3000K : L30 : 3000K Warm white 2700K : L27 : 2700K Warm white 2500K : L25 : 2500K Warm white 2200K : L22 : 2200K Warm white 2000K : L20 : 2000K Warm white 1800K : L18 : 1800K	Model No. LFUY-T Length SR [Light source color] - DF - O [Wattage] 0200 1100 2100 3100 4100 D : 6500K 6 : 6.4 W/m 0100 1150 2150 3150 4150 N : 5000K 10 : 10.8 W/m 0200 1200 2200 3200 4200 W : 4000K 15 : 15.9 W/m 0300 1300 2300 3300 4300 WW : 3500K 20 : 20.7 W/m 0350 1350 2350 3350 4350 L30 : 3000K 0400 1400 2400 3400 4400 L27 : 2700K 0450 1450 2450 3450 4450 L25 : 2500K 0500 1500 2500 3500 4500 L22 : 2200K 0550 1550 2550 3550 4550 L20 : 2000K 0600 1600 2600 3600 4600 L18 : 1800K 0650 1650 2650 3650 4650 0700 1700 2700 3700 4700 0750 1750 2750 3750 4750 0800 1800 2800 3800 4800 0850 1850 2850 3850 4850 0900 1900 2900 3900 4900 0950 1950 2950 3950 4950 1000 2000 3000 4000 5000
--	--	---

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd.

http://www.luci.co.jp

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / E-mail: info@luci.co.jp

UQ series

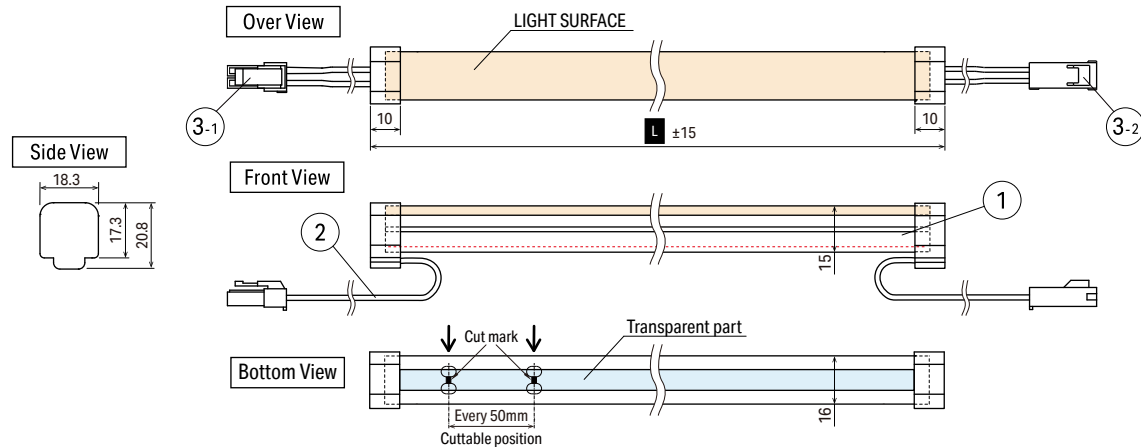
Luci SHIN UQ FLEX

Luci SHIN UQ FLEX (Indoor) (Both ends lead , wire - Back feed)



Luci Pte., Ltd.

2025.01.27



Accessories : PC Mounting clip for UQ FLEX (LFU-RC) (5pcs /1bag)	Accessories : Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)	Accessories : Joint cable 1000mm/5000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)
Accessories : Aluminum mounting rail 950 for UQ FLEX Indoor (LFU-RL0950-AL-C-I)	Attachments for rail & Accessories : PC hold Clip for UQ FLEX AL rail (LFU-PT-B) (5pcs/ 1bag)	Attachments for rail & Accessories : Joint plate for UQ FLEX AL rail (LFU-PT-E) (1pc/ 1bag)
Accessories : Aluminum mounting parts for UQ FLEX Indoor (LFU-RL0018-AL-C-I) (5 pcs/bag)	Attachments for rail & Accessories : PC hold Clip for UQ FLEX AL rail (LFU-PT-B) (5pcs/ 1bag)	Attachment & Accessories : Endcap for UQ FLEX indoor (LFU-EC) (2 pcs/bag)

Spec • Rating may be subject to change without announcements.

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Silicone	Diffuser	
2 Lead wire			
3 Connector		3-1	
4 Aluminium mounting rail C	Aluminum		
5 PC hold clip	PC	5-1: Mounting Parts 5-2: Hold clip	
6 Joint plate	SUS		
7 PC Mounting clip	PC		
8 Aluminum mounting Parts	Aluminum		
9 Power supply cable			
10 Joint cable		Red+, Black-	
11 End cap	Silicone		

Spec	Input voltage : DC24V	Light Source color	Model No.
Wattage : W/m (Refer to appendix)	Max. length per circuit : 5m	Daylight white : D : 6500K	LFUY-T [Length]WB-[Light source color]-DF-O-[Wattage]
Environment : Indoor	Max. fitting length : 5m	Natural white : N : 5000K	D : 6500K
Operating temperature : -5°C ~ +45°C		White : W : 4000K	N : 5000K
Attachments : Endcap		Warm white 3500K : WW : 3500K	W : 4000K
Accessories : Aluminum mounting rail 950,		Warm white 3000K : L30 : 3000K	WW : 3500K
Aluminum mounting parts,		Warm white 2700K : L27 : 2700K	L30 : 3000K
PC hold Clip, PC Mounting Clip, Joint plate, Endcap,		Warm white 2500K : L25 : 2500K	L27 : 2700K
Joint cable 1000mm/5000mm,		Warm white 2200K : L22 : 2200K	L25 : 2500K
Power supply cable 3000mm,		Warm white 2000K : L20 : 2000K	L22 : 2200K
		Warm white 1800K : L18 : 1800K	L20 : 2000K
			L18 : 1800K

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd.

<http://www.luci.co.jp>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / E-mail: info@luci.co.jp

UQ series

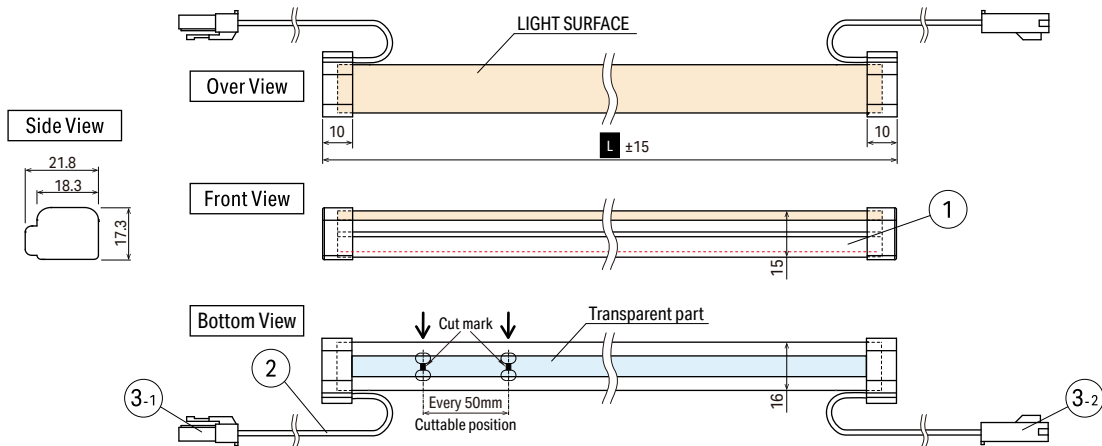
Luci SHIN UQ FLEX



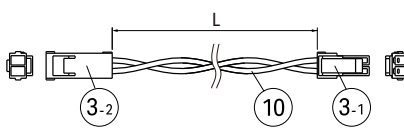
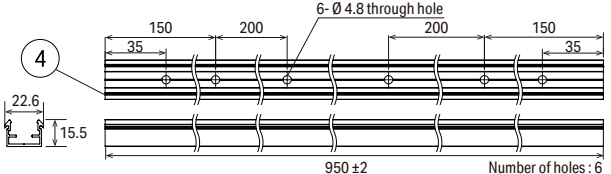

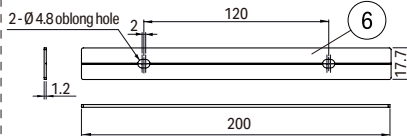



Luci SHIN UQ FLEX (Indoor) (Both ends lead, wire - Side feed)



Luci Pte., Ltd.

2025.01.27



Accessories: PC Mounting clip for UQ FLEX (LFU-RC) (5pcs/1bag) 	Accessories: Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I) 	Accessories: Joint cable 1000mm/5000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)  <table border="1"><thead><tr><th>Model number</th><th>L(mm)</th></tr></thead><tbody><tr><td>CAD-1000-MCFC-I</td><td>1000±15</td></tr><tr><td>CAD-5000-MCFC-I</td><td>5000⁺²⁵⁰₋₀</td></tr></tbody></table>	Model number	L(mm)	CAD-1000-MCFC-I	1000±15	CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₋₀
Model number	L(mm)							
CAD-1000-MCFC-I	1000±15							
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₋₀							
Accessories: Aluminum mounting rail 950 for UQ FLEX Indoor (LFU-RL0950-AL-C-I) 	Attachment for rail & Accessories: PC hold Clip for UQ FLEX AL rail (LFU-PT-B) (5pcs/ 1bag) 	Attachment for rail & Accessories: Joint plate for UQ FLEX AL rail (LFU-PT-E) (1pc/ 1bag) 						
Accessories: Aluminum mounting parts for UQ FLEX Indoor (LFU-RL0018-AL-C-I) (5 pcs/bag) 	Attachment for rail & Accessories: PC hold Clip for UQ FLEX AL rail (LFU-PT-B) (5pcs/ 1bag) 	Attachment & Accessories: Endcap for UQ FLEX indoor (LFU-EC) (2 pcs/bag) 						

Spec • Rating may be subject to change without announcements.

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Silicone	Diffuser	
2 Lead wire			
3 Connector		3-1	
4 Aluminium mounting rail C	Aluminum		
5 PC hold clip	PC	5-1: Mounting Parts 5-2: Hold clip	
6 Joint plate	SUS		
7 PC Mounting clip	PC		
8 Aluminum mounting Parts	Aluminum		
9 Power supply cable			
10 Joint cable		Red+, Black-	
11 End cap	Silicone		

Spec	Input voltage : DC24V	Light Source color	Model No.
Wattage : W/m (Refer to appendix)	Max. length per circuit : 5m	Daylight white : D : 6500K	LFUY-T Length WR - Light source color - DF - O - Wattage
Environment : Indoor	Max. fitting length : 5m	Natural white : N : 5000K	D : 6500K 6 : 6.4 W/m
Operating temperature : -5°C ~ +45°C		White : W : 4000K	N : 5000K 10 : 10.8 W/m
Attachments : Endcap		Warm white 3500K : WW : 3500K	W : 4000K 15 : 15.9 W/m
Accessories : Aluminum mounting rail 950,		Warm white 3000K : L30 : 3000K	WW : 3500K 20 : 20.7 W/m
Aluminum mounting parts,		Warm white 2700K : L27 : 2700K	
PC hold Clip, PC Mounting Clip, Joint plate, Endcap,		Warm white 2500K : L25 : 2500K	
Joint cable 1000mm/5000mm,		Warm white 2200K : L22 : 2200K	
Power supply cable 3000mm,		Warm white 2000K : L20 : 2000K	
		Warm white 1800K : L18 : 1800K	

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)

Luci Pte. Ltd.	http://www.luci.co.jp	E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ Tel: +65-6291-2410	Hong Kong Marketing Office Tel: +852-2219-8462	Korea Office Tel: +82-2-508-2541	Shanghai China mainland Regional HQ Tel: +86-21-5238-9115 / E-mail: info@luci.co.jp

Specifications [LFUY - I]

LFUY - Length** - Light source color - DF- I - Wattage

Specifications by length

Length	Fitting length (L)				Wattage			
	WR / WB	SR / SB	6 : 6.4w/m	10 : 10.8w/m	15 : 15.9w/m	20 : 20.7w/m		
0050	58.0mm	57.5mm	0.3w	0.5w	0.8w	1.0w		
0100	108.0mm	107.5mm	0.6w	1.1w	1.6w	2.1w		
0150	158.0mm	157.5mm	1.0w	1.6w	2.4w	3.1w		
0200	208.0mm	207.5mm	1.3w	2.2w	3.2w	4.1w		
0250	258.0mm	257.5mm	1.6w	2.7w	4.0w	5.2w		
0300	308.0mm	307.5mm	1.9w	3.3w	4.8w	6.2w		
0350	358.0mm	357.5mm	2.2w	3.8w	5.6w	7.2w		
0400	408.0mm	407.5mm	2.6w	4.3w	6.4w	8.3w		
0450	458.0mm	457.5mm	2.9w	4.9w	7.1w	9.3w		
0500	508.0mm	507.5mm	3.2w	5.4w	7.9w	10.3w		
0550	558.0mm	557.5mm	3.5w	6.0w	8.7w	11.4w		
0600	608.0mm	607.5mm	3.8w	6.5w	9.5w	12.4w		
0650	658.0mm	657.5mm	4.2w	7.0w	10.3w	13.4w		
0700	708.0mm	707.5mm	4.5w	7.6w	11.1w	14.5w		
0750	758.0mm	757.5mm	4.8w	8.1w	11.9w	15.5w		
0800	808.0mm	807.5mm	5.1w	8.7w	12.7w	16.5w		
0850	858.0mm	857.5mm	5.4w	9.2w	13.5w	17.6w		
0900	908.0mm	907.5mm	5.8w	9.8w	14.3w	18.6w		
0950	958.0mm	957.5mm	6.1w	10.3w	15.1w	19.6w		
1000	1008.0mm	1007.5mm	6.4w	10.8w	15.9w	20.7w		
1050	1058.0mm	1057.5mm	6.7w	11.4w	16.7w	21.7w		
1100	1108.0mm	1107.5mm	7.0w	11.9w	17.5w	22.7w		
1150	1158.0mm	1157.5mm	7.3w	12.5w	18.3w	23.8w		
1200	1208.0mm	1207.5mm	7.7w	13.0w	19.1w	24.8w		
1250	1258.0mm	1257.5mm	8.0w	13.5w	19.9w	25.8w		
1300	1308.0mm	1307.5mm	8.3w	14.1w	20.7w	26.9w		
1350	1358.0mm	1357.5mm	8.6w	14.6w	21.4w	27.9w		
1400	1408.0mm	1407.5mm	8.9w	15.2w	22.2w	28.9w		
1450	1458.0mm	1457.5mm	9.3w	15.7w	23.0w	30.0w		
1500	1508.0mm	1507.5mm	9.6w	16.3w	23.8w	31.0w		
1550	1558.0mm	1557.5mm	9.9w	16.8w	24.6w	32.0w		
1600	1608.0mm	1607.5mm	10.2w	17.3w	25.4w	33.1w		
1650	1658.0mm	1657.5mm	10.5w	17.9w	26.2w	34.1w		
1700	1708.0mm	1707.5mm	10.9w	18.4w	27.0w	35.1w		
1750	1758.0mm	1757.5mm	11.2w	19.0w	27.8w	36.2w		
1800	1808.0mm	1807.5mm	11.5w	19.5w	28.6w	37.2w		
1850	1858.0mm	1857.5mm	11.8w	20.0w	29.4w	38.2w		
1900	1908.0mm	1907.5mm	12.1w	20.6w	30.2w	39.3w		
1950	1958.0mm	1957.5mm	12.5w	21.1w	31.0w	40.3w		
2000	2008.0mm	2007.5mm	12.8w	21.7w	31.8w	41.3w		
2050	2058.0mm	2057.5mm	13.1w	22.2w	32.6w	42.4w		
2100	2108.0mm	2107.5mm	13.4w	22.8w	33.4w	43.4w		
2150	2158.0mm	2157.5mm	13.7w	23.3w	34.2w	44.4w		
2200	2208.0mm	2207.5mm	14.1w	23.8w	34.9w	45.5w		
2250	2258.0mm	2257.5mm	14.4w	24.4w	35.7w	46.5w		
2300	2308.0mm	2307.5mm	14.7w	24.9w	36.5w	47.5w		
2350	2358.0mm	2357.5mm	15.0w	25.5w	37.3w	48.6w		
2400	2408.0mm	2407.5mm	15.3w	26.0w	38.1w	49.6w		
2450	2458.0mm	2457.5mm	15.7w	26.5w	38.9w	50.6w		
2500	2508.0mm	2507.5mm	16.0w	27.1w	39.7w	51.7w		

Length	Fitting length				Wattage			
	WR / WB	SR / SB	6 : 6.4w/m	10 : 10.8w/m	15 : 15.9w/m	20 : 20.7w/m		
2550	2558.0mm	2557.5mm	16.3w	27.6w	40.5w	52.7w		
2600	2608.0mm	2607.5mm	16.6w	28.2w	41.3w	53.8w		
2650	2658.0mm	2657.5mm	16.9w	28.7w	42.1w	54.8w		
2700	2708.0mm	2707.5mm	17.3w	29.3w	42.9w	55.8w		
2750	2758.0mm	2757.5mm	17.6w	29.8w	43.7w	56.9w		
2800	2808.0mm	2807.5mm	17.9w	30.3w	44.5w	57.9w		
2850	2858.0mm	2857.5mm	18.2w	30.9w	45.3w	58.9w		
2900	2908.0mm	2907.5mm	18.5w	31.4w	46.1w	60.0w		
2950	2958.0mm	2957.5mm	18.9w	32.0w	46.9w	61.0w		
3000	3008.0mm	3007.5mm	19.2w	32.5w	47.7w	62.0w		
3050	3058.0mm	3057.5mm	19.5w	33.0w	48.4w	63.1w		
3100	3108.0mm	3107.5mm	19.8w	33.6w	49.2w	64.1w		
3150	3158.0mm	3157.5mm	20.1w	34.1w	50.0w	65.1w		
3200	3208.0mm	3207.5mm	20.4w	34.7w	50.8w	66.2w		
3250	3258.0mm	3257.5mm	20.8w	35.2w	51.6w	67.2w		
3300	3308.0mm	3307.5mm	21.1w	35.8w	52.4w	68.2w		
3350	3358.0mm	3357.5mm	21.4w	36.3w	53.2w	69.3w		
3400	3408.0mm	3407.5mm	21.7w	36.8w	54.0w	70.3w		
3450	3458.0mm	3457.5mm	22.0w	37.4w	54.8w	71.3w		
3500	3508.0mm	3507.5mm	22.4w	37.9w	55.6w	72.4w		
3550	3558.0mm	3557.5mm	22.7w	38.5w	56.4w	73.4w		
3600	3608.0mm	3607.5mm	23.0w	39.0w	57.2w	74.4w		
3650	3658.0mm	3657.5mm	23.3w	39.6w	58.0w	75.5w		
3700	3708.0mm	3707.5mm	23.6w	40.1w	58.8w	76.5w		
3750	3758.0mm	3757.5mm	24.0w	40.6w	59.6w	77.5w		
3800	3808.0mm	3807.5mm	24.3w	41.2w	60.4w	78.6w		
3850	3858.0mm	3857.5mm	24.6w	41.7w	61.2w	79.6w		
3900	3908.0mm	3907.5mm	24.9w	42.3w	62.0w	80.6w		
3950	3958.0mm	3957.5mm	25.2w	42.8w	62.7w	81.7w		
4000	4008.0mm	4007.5mm	25.6w	43.3w	63.5w	82.7w		
4050	4058.0mm	4057.5mm	25.9w	43.9w	64.3w	83.7w		
4100	4108.0mm	4107.5mm	26.2w	44.4w	65.1w	84.8w		
4150	4158.0mm	4157.5mm	26.5w	45.0w	65.9w	85.8w		
4200	4208.0mm	4207.5mm	26.8w	45.5w	66.7w	86.8w		
4250	4258.0mm	4257.5mm	27.2w	46.1w	67.5w	87.9w		
4300	4308.0mm	4307.5mm	27.5w	46.6w	68.3w	88.9w		
4350	4358.0mm	4357.5mm	27.8w	47.1w	69.1w	89.9w		
4400	4408.0mm	4407.5mm	28.1w	47.7w	69.9w	91.0w		
4450	4458.0mm	4457.5mm	28.4w	48.2w	70.7w	92.0w		
4500	4508.0mm	4507.5mm	28.8w	48.8w	71.5w	93.0w		
4550	4558.0mm	4557.5mm	29.1w	49.3w	72.3w	94.1w		
4600	4608.0mm	4607.5mm	29.4w	49.8w	73.1w	95.1w		
4650	4658.0mm	4657.5mm	29.7w	50.4w	73.9w	96.1w		
4700	4708.0mm	4707.5mm	30.0w	50.9w	74.7w	97.2w		
4750	4758.0mm	4757.5mm	30.4w	51.5w	75.5w	98.2w		
4800	4808.0mm	4807.5mm	30.7w	52.0w	76.2w	99.2w		
4850	4858.0mm	4857.5mm	31.0w	52.6w	77.0w	100.3w		
4900	4908.0mm	4907.5mm	31.3w	53.1w	77.8w	101.3w		
4950	4958.0mm	4957.5mm	31.6w	53.6w	78.6w	102.3w		
5000	5008.0mm	5007.5mm	32.0w	54.2w	79.4w	103.4w		

Photometry characterristic

Wattage 6 : 6.4W/m										
Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18
Luminous flux	711lm/m	705lm/m	692lm/m	686lm/m	667lm/m	629lm/m	466lm/m	434lm/m	397lm/m	290lm/m
Luminaire efficiency	111.3lm/W	110.3lm/W	108.4lm/W	107.4lm/W	104.4lm/W	98.5lm/W	72.9lm/W	68.0lm/W	62.1lm/W	48.7lm/W

Wattage 10 : 10.8W/m										
Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18
Luminous flux	1183lm/m	1172lm/m	1151lm/m	1141lm/m	1110lm/m	1047lm/m	775lm/m	722lm/m	659lm/m	478lm/m
Luminaire efficiency	109.2lm/W	108.2lm/W	106.3lm/W	105.3lm/W	102.4lm/W	96.6lm/W	71.5lm/W	66.7lm/W	60.9lm/W	48.3lm/W

Wattage 15 : 15.9W/m										
Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18
Luminous flux	1738lm/m	1722lm/m	1691lm/m	1676lm/m	1630lm/m	1538lm/m	1138lm/m	1061lm/m	969lm/m	705lm/m
Luminaire efficiency	109.4lm/W	108.4lm/W	106.5lm/W	105.5lm/W	102.6lm/W	96.8lm/W	71.6lm/W	66.8lm/W	61.0lm/W	47.5lm/W

Wattage 20 : 20.7W/m										
Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18
Luminous flux	2188lm/m	2169lm/m	2130lm/m	2111lm/m	2053lm/m	1936lm/m	1433lm/m	1336lm/m	1220lm/m	908lm/m
Luminaire efficiency	105.8lm/W	104.9lm/W	103.0lm/W	102.1lm/W	99.3lm/W	93.7lm/W	69.3lm/W	64.6lm/W	59.0lm/W	45.9lm/W

Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18
CRI	Ra96	Ra93	Ra97	Ra97	Ra95	Ra94	Ra94	Ra93	Ra91	Ra90

The values are measured values, not guaranteed values.