


Luci SHIN UQ FLEX IP67


Luci SHIN UQ FLEX IP67 (Outdoor) (One end lead , wire - Back feed)

Luci Pte., Ltd.


2025.01.27

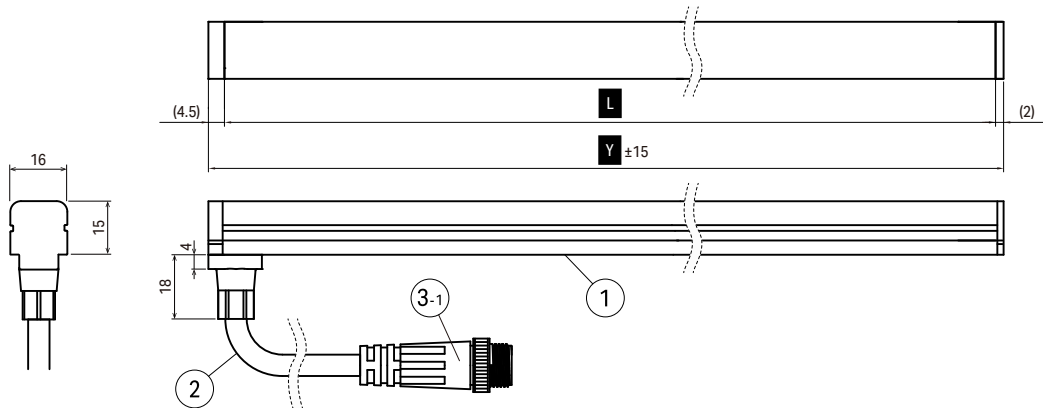


Accessories :
Mounting clip B for UQ FLEX
(LFU-RC-B) (5pcs /1bag)




Accessories :
Power supply cable 10M for UQ FLEX
(CAD-V010M-FPNN-O)

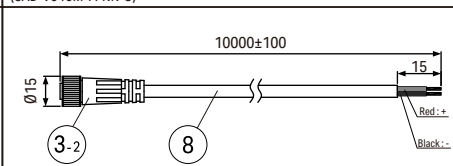


Accessories:
Joint cable 1M for UQ FLEX
(CAD-1000-MPEP-0)

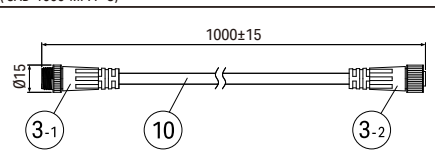


Accessories:
Aluminium mounting rail C type950 for UQ FLEX H13
(LFU-RL0950-AL-C)

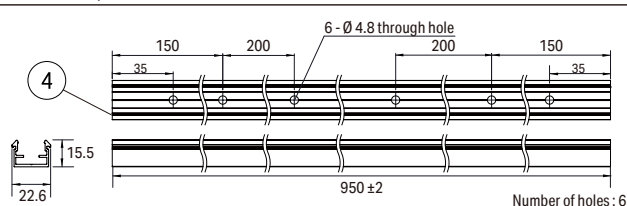


Attachments for rail & Accessories :
SUS hold Clip C for UQ FLEX AL rail C
(LFU-PT-C)(5pcs/ 1bag)



Attachments for rail & Accessories :
Joint plate for UQ FLEX AL rail C
(LFU-PT-D)(1pc/ 1bag)



The specifications and prices are subject to change without prior notice. Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body		Diffuser	
2	Lead wire			
3	Connector		3-1 3-2	
4	Aluminium mounting rail C	Aluminum		
5	SUS hold Clip C	Aluminum	5-1: Mounting Parts 5-2: Hold clip	
6	Joint plate	SUS		
7	Mounting clip B	SUS		
8	Power supply cable		Red+, Black-	
9	Connector cap			
10	Joint cable			

Spec	Input voltage : DC24V	Light Source color :	Daylight white	: D	: 6500K	Model No. LFUY-T	Length	SB	Light source color	- DF - O	Wattage
Wattage : _ W/m (Refer to appendix)			Natural white	: N	: 5000K		0050 1050	D : 6500K		5 : 5.9 W / m	
Max. length per circuit : 5.9W/m 9.9W/m 14.9W/m : 10m , 19.8W/m : 7.5m			White	: W	: 4000K		0100 1100	N : 5000K		9 : 9.9 W / m	
Max. fitting length : 2m Operating temperature : -5℃～+45℃			Warm white 3500K	: WW	: 3500K		0150 1150	W : 4000K		14 : 14.9 W / m	
Environment : In & Outdoor , IP67			Warm white 3000K	: L30	: 3000K		0200 1200	WW : 3500K		19 : 19.8 W / m	
Accessories : Aluminium mounting rail C type950,			Warm white 2700K	: L27	: 2700K		0250 1250	L30 : 3000K			
Mounting clip B (5pcs/1bag),			Warm white 2500K	: L25	: 2500K		0300 1300	L27 : 2700K			
SUS hold Clip C(5pcs/1bag),Joint plate(1pcs/1bag),		Warm white 2200K	: L22	: 2200K	0350 1350	L25 : 2500K					
Power supply cable 10M,Joint cable 1000mm		Warm white 2000K	: L20	: 2000K	0400 1400	L22 : 2200K					
		Warm white 1800K	: L18	: 1800K	0450 1450	L20 : 2000K					
					0500 1500	L18 : 1800K					
					0550 1550						
					0600 1600						
					0650 1650						
					0700 1700						
					0750 1750						
					0800 1800						
					0850 1850						
					0900 1900						
					0950 1950						
					1000 2000						

Job/Project Name	Area/Location/Circuit No.	
Product Code	Qty.	Length(mm)

Luci Pte. Ltd.

<http://www.luci.co.jp>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410

Hong Kong Marketing Office
Tel: +852-2219-8462

Korea Office
Tel: +82-2-508-2541

Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / E-mail: info@luci.co.jp


Luci SHIN UQ FLEX IP67

Luci SHIN UQ FLEX IP67 (Outdoor) (One end lead , wire - Side feed)




Luci Pte., Ltd.


2025.01.27

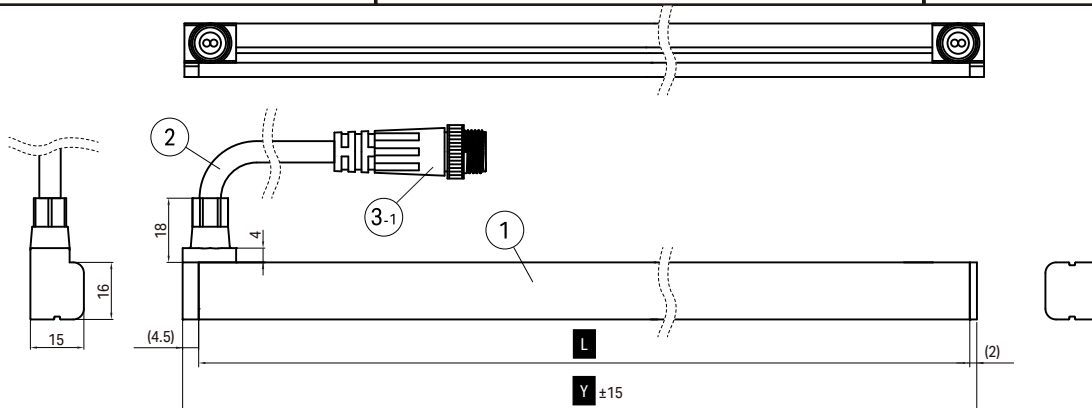


Accessories :
Mounting clip B for UQ FLEX
(LFU-RC-B) (5pcs /1bag)




Accessories:
Power supply cable 10M for UQ FLEX
(CAD-V010M-FPNN-O)

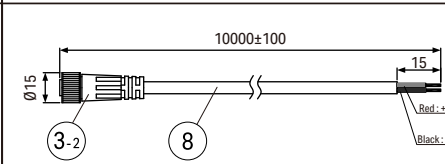


Accessories:
Joint cable 1M for UQ FLEX
(CAD-1000-MPEP-Q)

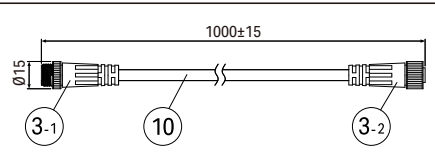


Accessories:
Aluminium mounting rail C type950 for UQ FLEX H13
(LFU-RL0950-AL-C)

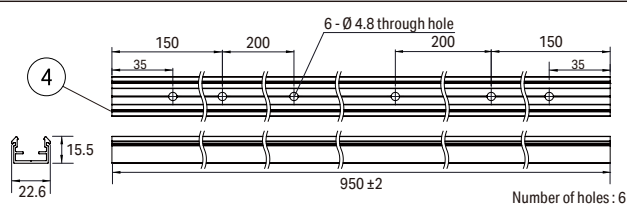


Attachments for rail & Accessories :
SUS hold Clip C for UQ FLEX AL rail (LFU-PT-C)(5pcs/ 1bag)



Attachments for rail & Accessories :
Joint plate for UQ FLEX AL rail C
(LFU-PT-D)(1pc/ 1bag)



The specifications and prices are subject to change without prior notice. Unit Of Measure : mm

	Part Name	Material	Note	Drawing 
1	Body		Diffuser	
2	Lead wire			
3	Connector		3-1 3-2	
4	Aluminium mounting rail C	Aluminum		
5	SUS hold Clip C	Aluminum	5-1: Mounting Parts 5-2: Hold clip	
6	Joint plate	SUS		
7	Mounting clip B	SUS		
8	Power supply cable		Red+, Black-	
9	Connector cap			
10	Joint cable			

Spec	Input voltage : DC24V	Light Source color :	Daylight white	: D	: 6500K	Model No.	LFUY-T	Length	SR	Light source color	- DF - O	Wattage
	Wattage : _ W/m (Refer to appendix)		Natural white	: N	: 5000K		0050 1050			D : 6500K		5 : 5.9 W/m
	Max. length per circuit : 5.9W/m 9.9W/m 14.9W/m : 10m, 19.8W/m : 7.5m		White	: W	: 4000K		0100 1100			N : 5000K		9 : 9.9 W/m
	Max. fitting length : 2m Operating temperature : -5℃～+45℃		Warm white 3500K	: WW	: 3500K		0150 1150			W : 4000K		14 : 14.9 W/m
	Environment : In & Outdoor, IP67		Warm white 3000K	: L30	: 3000K		0200 1200			WW : 3500K		19 : 19.8 W/m
	Accessories : Aluminium mounting rail C type950,		Warm white 2700K	: L27	: 2700K		0250 1250			L30 : 3000K		
	Mounting clip B (5pcs/1bag),		Warm white 2500K	: L25	: 2500K		0300 1300			L30 : 3000K		
	SUS hold Clip C(5pcs/1bag),Joint plate(1pcs/1bag),		Warm white 2200K	: L22	: 2200K		0350 1350			L27 : 2700K		
	Power supply cable 10M,Joint cable 1000mm		Warm white 2000K	: L20	: 2000K		0400 1400			L25 : 2500K		
			Warm white 1800K	: L18	: 1800K		0450 1450			L22 : 2200K		
				0500 1500			L20 : 2000K					
				0550 1550			L18 : 1800K					
				0600 1600								
				0650 1650								
				0700 1700								
				0750 1750								
				0800 1800								
				0850 1850								
				0900 1900								
				0950 1950								
				1000 2000								

Job/Project Name	Area/Location/Circuit No.	
Product Code	Qty.	Length(mm)

Luci Pte. Ltd.

<http://www.luci.co.jp>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410

Hong Kong Marketing Office
Tel: +852-2219-8462

Korea Office
Tel: +82-2-508-2541

Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / E-mail: info@luci.co.jp



UQ series

Luci SHIN UQ FLEX IP67


Luci SHIN UQ FLEX IP67 (Outdoor) (Both ends lead , wire - Back feed)

Luci Pte., Ltd.


2025.01.27

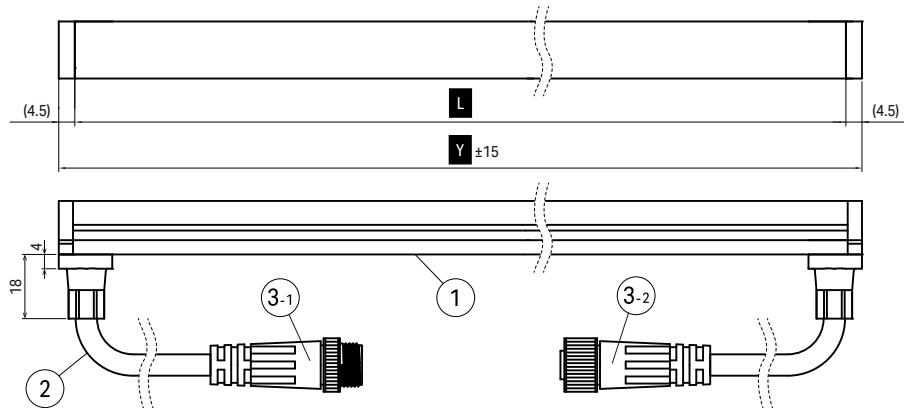


Accessories :
Mounting clip B for UQ FLEX
(LFU-RC-B) (5pcs/1bag)




Accessories :
Power supply cable 10M for UQ FLEX
(CAD-V010M-FPNN-O)

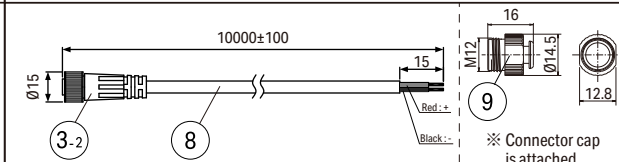


Accessories :
Joint cable 1M for UQ FLEX
(CAD-1000-MPFP-O)

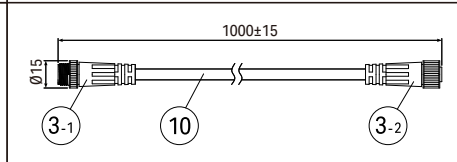


Accessories :
Aluminium mounting rail C type950 for UQ FLEX H13
(LFU-RL0950-AL-C)

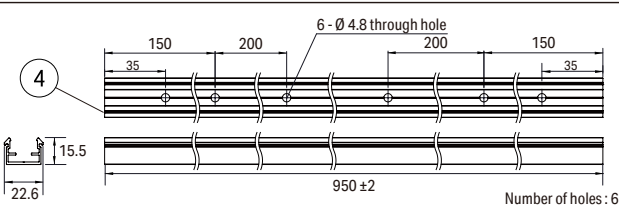

Attachments for rail & Accessories :
SUS hold Clip C for UQ FLEX AL rail C
(LFU-PT-C)(5pcs/ 1bag)



Attachments for rail & Accessories :
Joint plate for UQ FLEX AL rail C
(LFU-PT-D)(1pc/ 1bag)



The specifications and prices are subject to change without prior notice. Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body		Diffuser	
2	Lead wire			
3	Connector		3-1 3-2	
4	Aluminium mounting rail C	Aluminum		
5	SUS hold Clip C	Aluminum	5-1: Mounting Parts 5-2: Hold clip	
6	Joint plate	SUS		
7	Mounting clip B	SUS		
8	Power supply cable		Red+, Black-	
9	Connector cap			
10	Joint cable			

Spec	Input voltage : DC24V	Light Source color :	Model No.
	Wattage : _ W/m (Refer to appendix)	Daylight white : D : 6500K	LFUY-T [Length]WB-[Light source color]-DF-O-[Wattage]
	Max. length per circuit : 5.9W/m 9.9W/m 14.9W/m : 10m, 19.8W/m : 7.5m	Natural white : N : 5000K	0050 1050 D : 6500K 5 : 5.9 W/m
	Max. fitting length : 2m Operating temperature : -5°C ~ +45°C	White : W : 4000K	0100 1100 N : 5000K 9 : 9.9 W/m
	Environment : In & Outdoor, IP67	Warm white 3500K : WW : 3500K	0150 1150 W : 4000K 14 : 14.9 W/m
	Accessories : Aluminium mounting rail C type950,	Warm white 3000K : L30 : 3000K	0200 1200 WW : 3500K 19 : 19.8 W/m
	Mounting clip B (5pcs/1bag),	Warm white 2700K : L27 : 2700K	0250 1250 L30 : 3000K
	SUS hold Clip C(5pcs/1bag),Joint plate(1pcs/1bag),	Warm white 2500K : L25 : 2500K	0300 1300 L27 : 2700K
	Power supply cable 10M,Joint cable 1000mm	Warm white 2200K : L22 : 2200K	0350 1350 L25 : 2500K
		Warm white 2000K : L20 : 2000K	0400 1400 L22 : 2200K
		Warm white 1800K : L18 : 1800K	0450 1450 L20 : 2000K
			0500 1500 L18 : 1800K
			0550 1550
			0600 1600
			0650 1650
			0700 1700
			0750 1750
			0800 1800
			0850 1850
			0900 1900
			0950 1950
			1000 2000

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd.

http://www.luci.co.jp

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / E-mail: info@luci.co.jp

UQ series


Luci SHIN UQ FLEX IP67

Luci SHIN UQ FLEX IP67 (Outdoor) (Both ends lead , wire - Side feed)


Luci Pte., Ltd.

2025.01.27



Luci

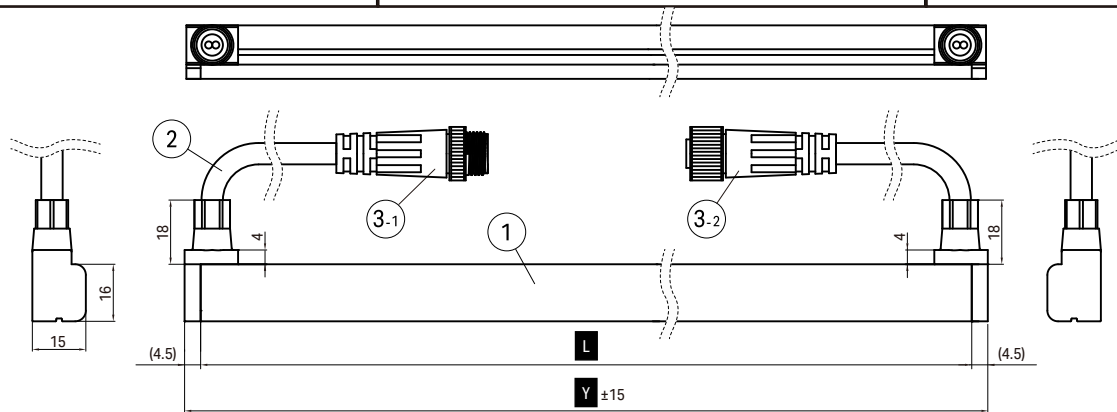


Accessories:
Mounting clip B for UQ FLEX
(LFU-RC-B) (5pcs/1bag)




Accessories:
Power supply cable 10M for UQ FLEX
(CAD-V010M-FPNN-O)

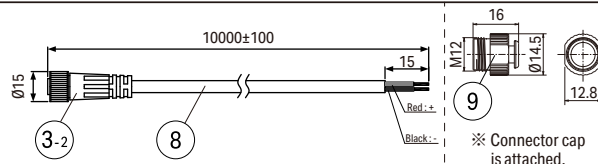


Accessories:
Joint cable 1M for UQ FLEX
(CAD-1000-MPPF-O)

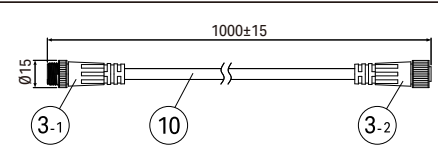


Accessories:
Aluminium mounting rail C type950 for UQ FLEX H13
(LFU-RL0950-AL-C)

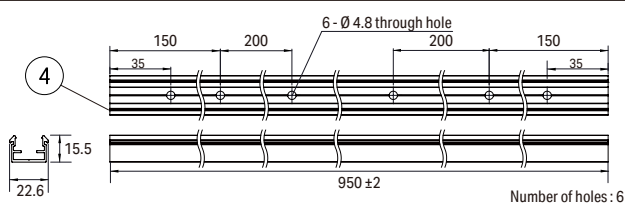


Attachments for rail & Accessories:
SUS hold Clip C for UQ FLEX AL rail C
(LFU-PT-C) (5pcs/1bag)



Attachments for rail & Accessories:
Joint plate for UQ FLEX AL rail C
(LFU-PT-D) (1pc/1bag)



The specifications and prices are subject to change without prior notice. Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body		Diffuser	
2	Lead wire			
3	Connector		3-1 3-2	
4	Aluminium mounting rail C	Aluminum		
5	SUS hold Clip C	Aluminum	5-1: Mounting Parts 5-2: Hold clip	
6	Joint plate	SUS		
7	Mounting clip B	SUS		
8	Power supply cable		Red+, Black-	
9	Connector cap			
10	Joint cable			

Spec	Input voltage : DC24V
	Wattage : _ W/m (Refer to appendix)
	Max. length per circuit : 5.9W/m 9.9W/m 14.9W/m : 10m, 19.8W/m : 7.5m
	Max. fitting length : 2m Operating temperature : -5℃~+45℃
	Environment : In & Outdoor, IP67
	Accessories : Aluminium mounting rail C type950,
	Mounting clip B (5pcs/1bag),
	SUS hold Clip C(5pcs/1bag), Joint plate(1pcs/1bag),
	Power supply cable 10M, Joint cable 1000mm

Light Source color :	Daylight white : D : 6500K
	Natural white : N : 5000K
	White : W : 4000K
	Warm white 3500K : WW : 3500K
	Warm white 3000K : L30 : 3000K
	Warm white 2700K : L27 : 2700K
	Warm white 2500K : L25 : 2500K
	Warm white 2200K : L22 : 2200K
	Warm white 2000K : L20 : 2000K
	Warm white 1800K : L18 : 1800K

Model No.	LFUY - T [Length] WR - [Light source color] - DF - O - [Wattage]
	0050 1050 D : 6500K 5 : 5.9 W/m
	0100 1100 N : 5000K 9 : 9.9 W/m
	0150 1150 W : 4000K 14 : 14.9 W/m
	0200 1200 WW : 3500K 19 : 19.8 W/m
	0250 1250 L30 : 3000K
	0300 1300 L27 : 2700K
	0350 1350 L25 : 2500K
	0400 1400 L22 : 2200K
	0450 1450 L20 : 2000K
	0500 1500 L18 : 1800K
	0550 1550
	0600 1600
	0650 1650
	0700 1700
	0750 1750
	0800 1800
	0850 1850
	0900 1900
	0950 1950
	1000 2000

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd.

http://www.luci.co.jp

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / E-mail: info@luci.co.jp

Luci Pte. Ltd.		http://www.luci.co.jp	E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ Tel: +65-6291-2410		Hong Kong Marketing Office Tel: +852-2219-8462	Korea Office Tel: +82-2-508-2541	Shanghai China mainland Regional HQ Tel: +86-21-5238-9115 / E-mail: info@luci.co.jp

Specifications [LFUY - O]

LFUY - Length** - Light source color - DF- O - Wattage

Specifications by length

Length	Fitting length (L)				Wattage			
	WR / WB	SR / SB	WS	SS	5 : 5.9W/m	9 : 9.9W/m	14 : 14.9W/m	19 : 19.8W/m
0050	59.0mm	56.5mm	89.0mm	71.5mm	0.3W	0.5W	0.7W	1.0W
0100	109.0mm	106.5mm	139.0mm	121.5mm	0.6W	1.0W	1.5W	2.0W
0150	159.0mm	156.5mm	189.0mm	171.5mm	0.9W	1.5W	2.2W	3.0W
0200	209.0mm	206.5mm	239.0mm	221.5mm	1.2W	2.0W	3.0W	4.0W
0250	259.0mm	256.5mm	289.0mm	271.5mm	1.5W	2.5W	3.7W	5.0W
0300	309.0mm	306.5mm	339.0mm	321.5mm	1.8W	3.0W	4.5W	5.9W
0350	359.0mm	356.5mm	389.0mm	371.5mm	2.1W	3.5W	5.2W	6.9W
0400	409.0mm	406.5mm	439.0mm	421.5mm	2.4W	4.0W	5.9W	7.9W
0450	459.0mm	456.5mm	489.0mm	471.5mm	2.7W	4.5W	6.7W	8.9W
0500	509.0mm	506.5mm	539.0mm	521.5mm	3.0W	5.0W	7.4W	9.9W
0550	559.0mm	556.5mm	589.0mm	571.5mm	3.3W	5.4W	8.2W	10.9W
0600	609.0mm	606.5mm	639.0mm	621.5mm	3.6W	5.9W	8.9W	11.9W
0650	659.0mm	656.5mm	689.0mm	671.5mm	3.9W	6.4W	9.7W	12.9W
0700	709.0mm	706.5mm	739.0mm	721.5mm	4.2W	6.9W	10.4W	13.9W
0750	759.0mm	756.5mm	789.0mm	771.5mm	4.5W	7.4W	11.1W	14.9W
0800	809.0mm	806.5mm	839.0mm	821.5mm	4.8W	7.9W	11.9W	15.8W
0850	859.0mm	856.5mm	889.0mm	871.5mm	5.0W	8.4W	12.6W	16.8W
0900	909.0mm	906.5mm	939.0mm	921.5mm	5.3W	8.9W	13.4W	17.8W
0950	959.0mm	956.5mm	989.0mm	971.5mm	5.6W	9.4W	14.1W	18.8W
1000	1009.0mm	1006.5mm	1039.0mm	1021.5mm	5.9W	9.9W	14.9W	19.8W
1050	1059.0mm	1056.5mm	1089.0mm	1071.5mm	6.2W	10.4W	15.6W	20.8W
1100	1109.0mm	1106.5mm	1139.0mm	1121.5mm	6.5W	10.9W	16.3W	21.8W
1150	1159.0mm	1156.5mm	1189.0mm	1171.5mm	6.8W	11.4W	17.1W	22.8W
1200	1209.0mm	1206.5mm	1239.0mm	1221.5mm	7.1W	11.9W	17.8W	23.8W
1250	1259.0mm	1256.5mm	1289.0mm	1271.5mm	7.4W	12.4W	18.6W	24.8W
1300	1309.0mm	1306.5mm	1339.0mm	1321.5mm	7.7W	12.9W	19.3W	25.7W
1350	1359.0mm	1356.5mm	1389.0mm	1371.5mm	8.0W	13.4W	20.0W	26.7W
1400	1409.0mm	1406.5mm	1439.0mm	1421.5mm	8.3W	13.9W	20.8W	27.7W
1450	1459.0mm	1456.5mm	1489.0mm	1471.5mm	8.6W	14.4W	21.5W	28.7W
1500	1509.0mm	1506.5mm	1539.0mm	1521.5mm	8.9W	14.9W	22.3W	29.7W
1550	1559.0mm	1556.5mm	1589.0mm	1571.5mm	9.2W	15.3W	23.0W	30.7W
1600	1609.0mm	1606.5mm	1639.0mm	1621.5mm	9.5W	15.8W	23.8W	31.7W
1650	1659.0mm	1656.5mm	1689.0mm	1671.5mm	9.8W	16.3W	24.5W	32.7W
1700	1709.0mm	1706.5mm	1739.0mm	1721.5mm	10.1W	16.8W	25.2W	33.7W
1750	1759.0mm	1756.5mm	1789.0mm	1771.5mm	10.4W	17.3W	26.0W	34.7W
1800	1809.0mm	1806.5mm	1839.0mm	1821.5mm	10.7W	17.8W	26.7W	35.6W
1850	1859.0mm	1856.5mm	1889.0mm	1871.5mm	11.0W	18.3W	27.5W	36.6W
1900	1909.0mm	1906.5mm	1939.0mm	1921.5mm	11.3W	18.8W	28.2W	37.6W
1950	1959.0mm	1956.5mm	1989.0mm	1971.5mm	11.6W	19.3W	29.0W	38.6W
2000	2009.0mm	2006.5mm	2039.0mm	2021.5mm	11.9W	19.8W	29.7W	39.6W

Photometry characterristic

Wattage 5 : 5.9W/m										
Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18
Luminous flux	536lm	532lm	522lm	517lm	503lm	475lm	351lm	328lm	299lm	290lm/m
Luminaire efficiency	90.3lm/W	89.5lm/W	87.9lm/W	87.1lm/W	84.7lm/W	79.9lm/W	59.1lm/W	55.1lm/W	50.3lm/W	48.7lm/W

Wattage 9 : 9.9W/m										
Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18
Luminous flux	886lm	878lm	862lm	855lm	831lm	784lm	580lm	541lm	494lm	478lm/m
Luminaire efficiency	89.5lm/W	88.7lm/W	87.1lm/W	86.3lm/W	84.0lm/W	79.2lm/W	58.6lm/W	54.6lm/W	49.9lm/W	48.3lm/W

Wattage 14 : 14.9W/m										
Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18
Luminous flux	1306lm	1294lm	1271lm	1259lm	1225lm	1155lm	855lm	797lm	728lm	705lm/m
Luminaire efficiency	87.9lm/W	87.1lm/W	85.6lm/W	84.8lm/W	82.5lm/W	77.8lm/W	57.6lm/W	53.7lm/W	49.0lm/W	47.5lm/W

Wattage 19 : 19.8W/m										
Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18
Luminous flux	1683lm	1668lm	1638lm	1623lm	1578lm	1489lm	1102lm	1027lm	938lm	908lm/m
Luminaire efficiency	85.0lm/W	84.2lm/W	82.7lm/W	82.0lm/W	79.7lm/W	75.2lm/W	55.6lm/W	51.9lm/W	47.4lm/W	45.9lm/W

Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18
CRI	Ra96	Ra93	Ra97	Ra97	Ra95	Ra94	Ra94	Ra93	Ra91	Ra90

The values are measured values, not guaranteed values.