


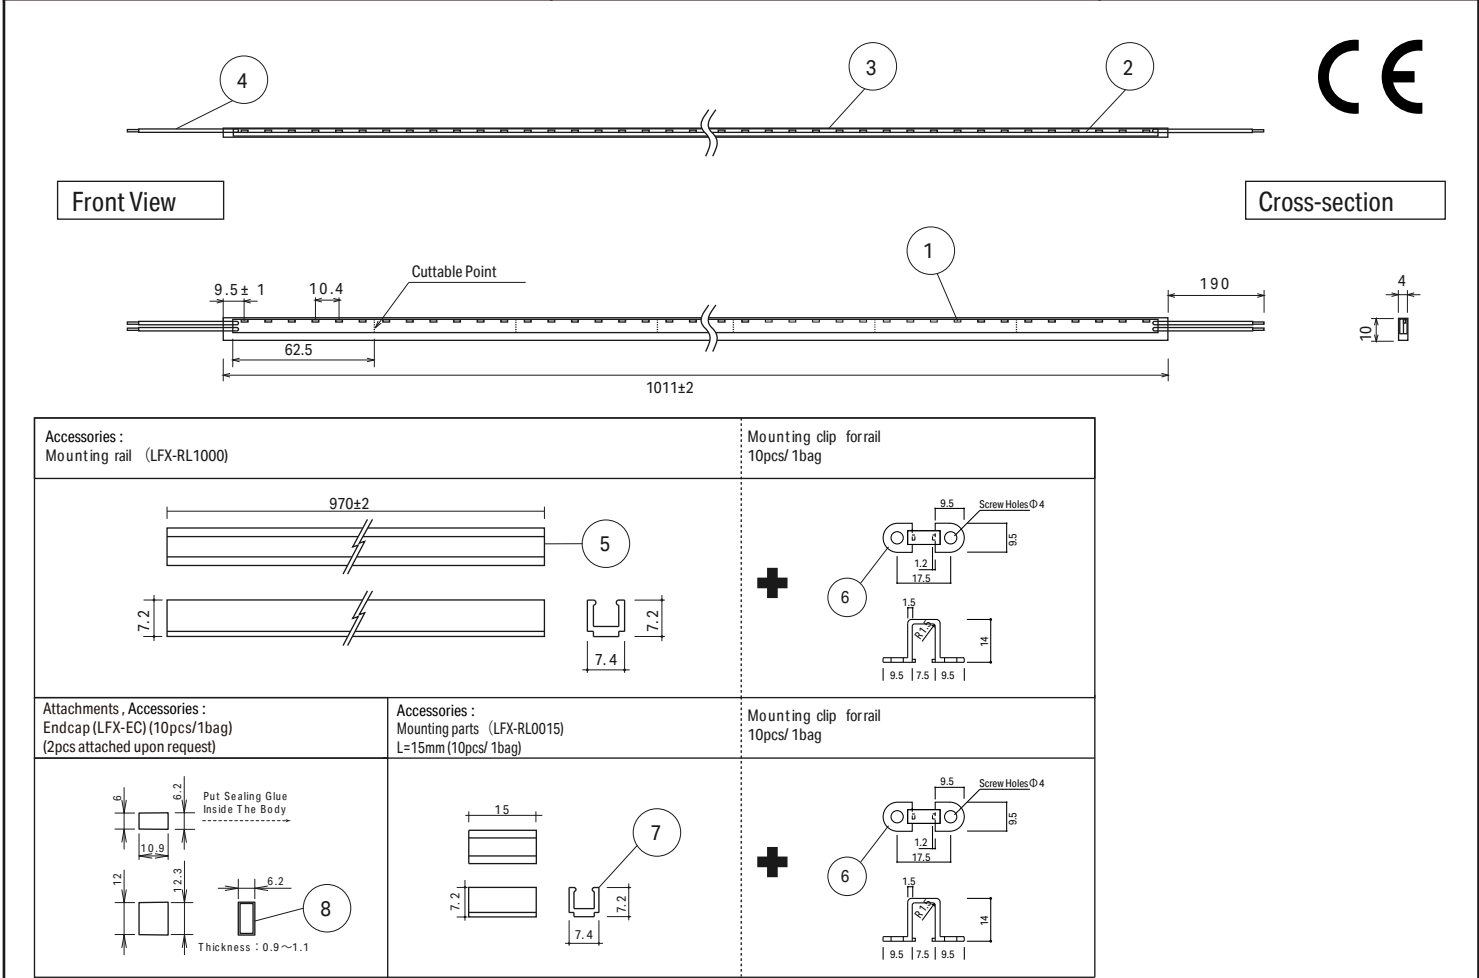

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	LED		SMD type	
2	Tape substrate	FPC	White	
3	Body	Flexible Acrylic	Clear / Diffuser ※Custum order	
4	Lead wire		UL1015 AWG24 Black + ,White -	
5	Mounting rail	AES	White	
6	Mounting clip for rail	Polycarbonate	Clear	
7	Mounting parts	Polycarbonate	White	
8	End cap	Polycarbonate	Clear	
9				
10				
Spec	Input voltage : DC24V		Light Source color : Daylight white : D : 7100K (Ra74/ 331lm/W) Natural white : N : 5300K White : W : 4200K (Ra70/ 317lm/W) Warm white 3500K : WW : 3500K (Ra75/ 298lm/W) Warm white 3000K : L30 : 3000K (Ra70/ 292lm/W) Warm white 2700K : L27 : 2700K (Ra71/ 278lm/W) Warm white 2400K : L24 : 2400K (Ra65/ 251lm/W) Warm white 2100K : L21 : 2100K Warm white 1900K : L19 : 1900K	Item Number
	Wattage : 4.2W			LFXF10-T1000-D- CL or DF -I LFXF10-T1000-N- CL or DF -I LFXF10-T1000-W- CL or DF -I LFXF10-T1000-WW- CL or DF -I LFXF10-T1000-L30- CL or DF -I LFXF10-T1000-L27- CL or DF -I LFXF10-T1000-L24- CL or DF -I LFXF10-T1000-L19- CL or DF -I
	Weight : 40g			
	Number of LEDs : 96			
	Max. length per circuit : 5m			
	Min. allowable bend range : R50mm			
	Environment : Indoors (No condensation)			
	Attachments : End cap×2pcs (※upon request)			
	Accessories : Mounting rail, Mounting clip, Mounting parts, End cap			
Job/Project Name			Area/Location/Circuit No.	
Product Code			Qty. Length(mm)	
Luci Pte. Ltd. http://www.luci.co.jp E-mail: info@ luci.co.jp			LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.	
Singapore World HQ Tel: +65-6291-2410		Hong Kong Marketing Office Tel: +852-2219-8462 / Fax: +852-2219-8461	Korea Office Tel: +82-2-508-2541	Shanghai China mainland Regional HQ Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@ luci.co.jp