

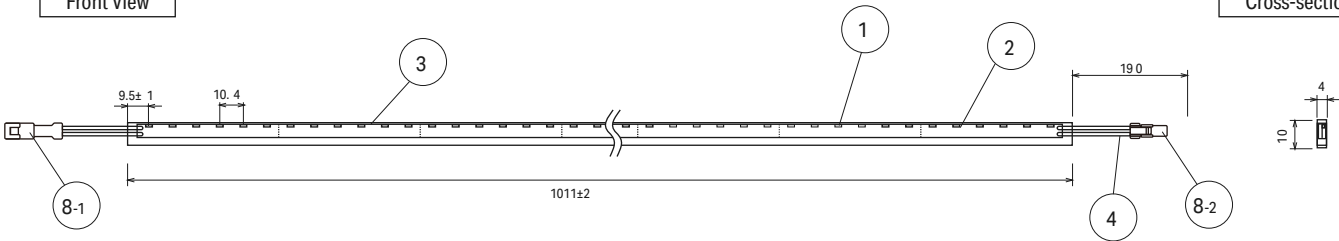
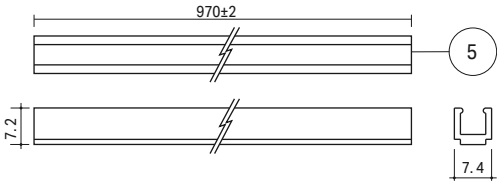







Front View


Cross-section

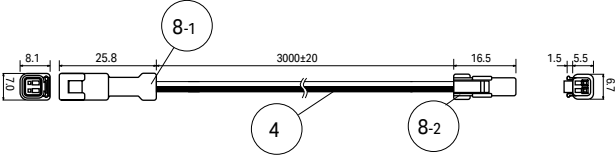

|                                                                                     |                                                                                     |                                                                                      |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Accessories :<br>Mounting rail (LFX-RL1000)                                         | Mounting clip for rail<br>10pcs/ 1bag                                               | IP65 connector                                                                       |
|    |   |   |
| Accessories :<br>Mounting parts (LFX-RL0015)<br>L=15mm (10pcs/ 1bag)                | Mounting clip for rail<br>10pcs/ 1bag                                               | Accessories :<br>Outdoor cable 3M TR connector (CAD-3000-MEFE-0)                     |
|  |  |  |

Spec • Rating may be subject to change without announcements

Unit Of Measure : m m
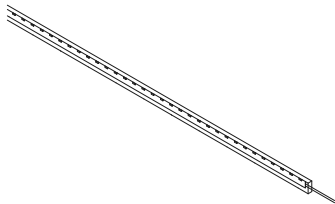
|   | Part Name              | Material         | Note                           | Drawing                                                                               |
|---|------------------------|------------------|--------------------------------|---------------------------------------------------------------------------------------|
| 1 | LED                    |                  | SMD type                       |  |
| 2 | Tape substrate         | FPC              | White                          |                                                                                       |
| 3 | Body                   | Flexible Acrylic | Clear / Diffuser ※Custum order |                                                                                       |
| 4 | Lead wire              |                  | UL1007 AWG22 Black+, White-    |                                                                                       |
| 5 | Mounting rail          | AES              | White                          |                                                                                       |
| 6 | Mounting clip for rail | Polycarbonate    | Clear                          |                                                                                       |
| 7 | Mounting parts         | Polycarbonate    | White                          |                                                                                       |
| 8 | IP65 connector         | Nylon            | White, UL94V-0                 |                                                                                       |
|   |                        |                  |                                |                                                                                       |
|   |                        |                  |                                |                                                                                       |

| Spec | Input voltage : DC24V                                      | Light Source color :                            | Item Number                                                                                                                                                                                                                                                   |
|------|------------------------------------------------------------|-------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      | Wattage : 4.2W                                             | Daylight white : D : 7100K (Ra74 / 331lm/W)     | LFXF10-T1000-D- CL or DF -O<br>LFXF10-T1000-N- CL or DF -O<br>LFXF10-T1000-W- CL or DF -O<br>LFXF10-T1000-WW- CL or DF -O<br>LFXF10-T1000-L30- CL or DF -O<br>LFXF10-T1000-L27- CL or DF -O<br>LFXF10-T1000-L24- CL or DF -O<br>LFXF10-T1000-L19- CL or DF -O |
|      | Weight : 40g                                               | Natural white : N : 5300K                       |                                                                                                                                                                                                                                                               |
|      | Number of LEDs : 96                                        | White : W : 4200K (Ra70 / 317lm/W)              |                                                                                                                                                                                                                                                               |
|      | Max. length per circuit : 5m                               | Warm white 3500K : WW : 3500K (Ra75 / 298lm/W)  |                                                                                                                                                                                                                                                               |
|      | Min. allowable bend range : R50mm                          | Warm white 3000K : L30 : 3000K (Ra70 / 292lm/W) |                                                                                                                                                                                                                                                               |
|      | Environment : In&Outdoors (IP65)                           | Warm white 2700K : L27 : 2700K (Ra71 / 278lm/W) |                                                                                                                                                                                                                                                               |
|      | Attachments : -                                            | Warm white 2400K : L24 : 2400K (Ra65 / 251lm/W) |                                                                                                                                                                                                                                                               |
|      | Accessories : Mounting rail, Mounting clip, Mounting parts | Warm white 2100K : L21 : 2100K                  |                                                                                                                                                                                                                                                               |
|      |                                                            | Warm white 1900K : L19 : 1900K                  |                                                                                                                                                                                                                                                               |
|      |                                                            |                                                 |                                                                                                                                                                                                                                                               |

|                  |                           |
|------------------|---------------------------|
| Job/Project Name | Area/Location/Circuit No. |
| Product Code     | Qty. Length(mm)           |