

RECTA

Luci RECTA


Luci RECTA 100

Luci Pte., Ltd.


2022.09.12




Front View







Side View 1

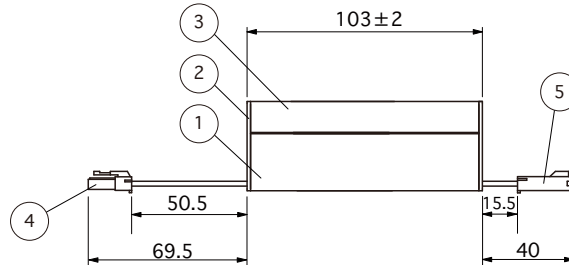

Side View 2

Accessories :
Mounting parts A (LTH-PTA)

(2pcs included, 2pcs/1bag)

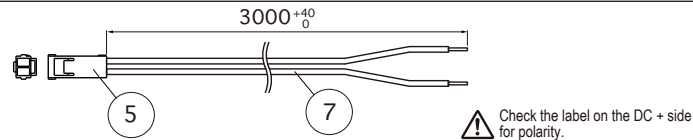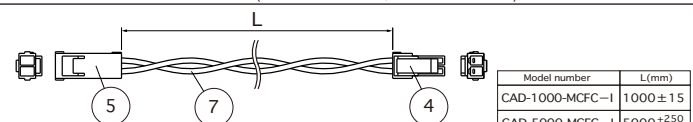Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)Installation Dimensions
(Side View)

Unit Of Measure : mm

The specifications and prices are subject to change without prior notice.

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Side cover	Polycarbonate	Diffuser	
3	Cover	Polycarbonate	Diffuser	
4	Connector	Nylon	UL94 V-2 White	
5	Connector	Nylon	UL94 V-2 White	
6	Mounting parts	Stainless steel	Silver	
7	Lead wire		UL1007 AWG20	
8				
9				

Spec	Input voltage : DC24V	Light Source color :	Item Number
Power consumption : 3.1W		Natural white : N : 5000K (238 lm/ Ra 92)	LRE-0103-N-DF-I LRE-0103-W-DF-I LRE-0103-WW-DF-I LRE-0103-L30-DF-I LRE-0103-L27-DF-I LRE-0103-L24-DF-I
Weight : 50g		White : W : 4000K (238 lm/ Ra 92)	
Lamp fitting length(L) : 103mm		Warm white 3500K : WW : 3500K (230 lm/ Ra 93)	
Max. sets connectable : 3.3m		Warm white 3000K : L30 : 3000K (222 lm/ Ra 94)	
Environment : Indoors (No Condensation)		Warm white 2700K : L27 : 2700K (215 lm/ Ra 93)	
Attachments : Mounting parts A (LTH-PTA) (2pcs/1bag)		Warm white 2400K : L24 : 2400K (199 lm/ Ra 93)	
Option parts : Power supply cable 3000mm,			
Joint cable 1000mm,			

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

RECTA

Luci RECTA


Luci RECTA 200

Luci Pte., Ltd.


2022.09.12


Luci


Front View



Side View 1

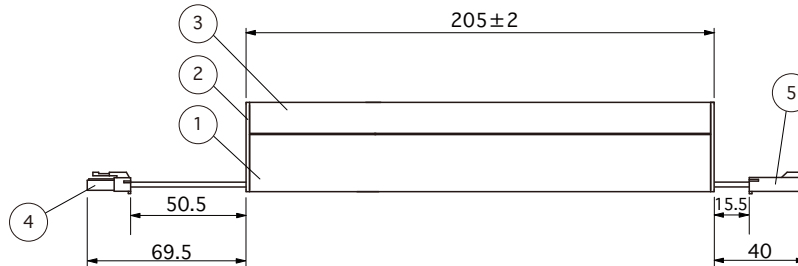


Side View 2





Accessories :
Mounting parts A (LTH-PTA)



(2pcs included, 2pcs/1bag)



Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCINN-I)




Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)

Installation Dimensions
(Side View)

Unit Of Measure : mm

The specifications and prices are subject to change without prior notice.

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Side cover	Polycarbonate	Diffuser	
3	Cover	Polycarbonate	Diffuser	
4	Connector	Nylon	UL94 V-2 White	
5	Connector	Nylon	UL94 V-2 White	
6	Mounting parts	Stainless steel	Silver	
7	Lead wire		UL1007 AWG20	
8				
9				

Spec	Input voltage : DC24V	Light Source color :	Item Number
Power consumption : 6.2W		Natural white : N : 5000K (476 lm/ Ra 92)	LRE-0205-N-DF-I LRE-0205-W-DF-I LRE-0205-WW-DF-I LRE-0205-L30-DF-I LRE-0205-L27-DF-I LRE-0205-L24-DF-I
Weight : 90g		White : W : 4000K (476 lm/ Ra 92)	
Lamp fitting length(L) : 205mm		Warm white 3500K : WW : 3500K (460 lm/ Ra 93)	
Max. sets connectable : 3.3m		Warm white 3000K : L30 : 3000K (445 lm/ Ra 94)	
Environment : Indoors (No Condensation)		Warm white 2700K : L27 : 2700K (430 lm/ Ra 93)	
Attachments : Mounting parts A (LTH-PTA) (2pcs/1bag)		Warm white 2400K : L24 : 2400K (399 lm/ Ra 93)	
Option parts : Power supply cable 3000mm,			
Joint cable 1000mm,			

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

RECTA

Luci RECTA


Luci RECTA 300




Luci Pte., Ltd.

2022.09.12


Front View




Side View 1

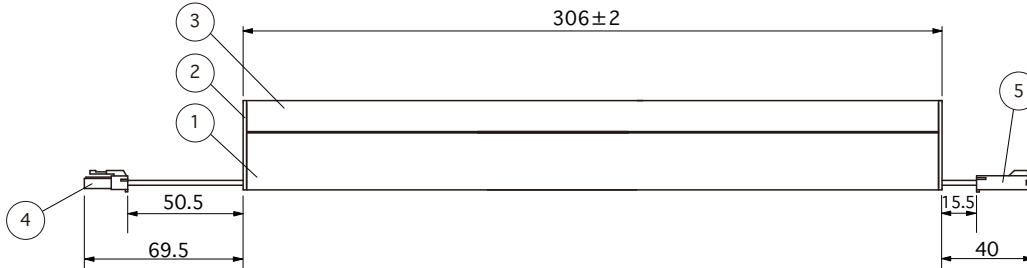

Side View 2



Accessories : Mounting parts A (LTH-PTA) (2pcs included, 2pcs/1bag)	Option parts : Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)						
	Option parts : Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)						
	<table border="1"> <thead> <tr> <th>Model number</th><th>L(mm)</th></tr> </thead> <tbody> <tr> <td>CAD-1000-MCFC-I</td><td>1000±15</td></tr> <tr> <td>CAD-5000-MCFC-I</td><td>5000±250</td></tr> </tbody> </table>	Model number	L(mm)	CAD-1000-MCFC-I	1000±15	CAD-5000-MCFC-I	5000±250
Model number	L(mm)						
CAD-1000-MCFC-I	1000±15						
CAD-5000-MCFC-I	5000±250						



Unit Of Measure : mm

The specifications and prices are subject to change without prior notice.

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Side cover	Polycarbonate	Diffuser	
3	Cover	Polycarbonate	Diffuser	
4	Connector	Nylon	UL94 V-2 White	
5	Connector	Nylon	UL94 V-2 White	
6	Mounting parts	Stainless steel	Silver	
7	Lead wire		UL1007 AWG20	
8				
9				

Spec	Input voltage : DC24V	Light Source color :	Item Number
Power consumption : 9.3W		Natural white : N : 5000K (714 lm/ Ra 92)	LRE-0306-N-DF-I LRE-0306-W-DF-I LRE-0306-WW-DF-I LRE-0306-L30-DF-I LRE-0306-L27-DF-I LRE-0306-L24-DF-I
Weight : 140g		White : W : 4000K (714 lm/ Ra 92)	
Lamp fitting length(L) : 306mm		Warm white 3500K : WW : 3500K (690 lm/ Ra 93)	
Max. sets connectable : 3.3m		Warm white 3000K : L30 : 3000K (667 lm/ Ra 94)	
Environment : Indoors (No Condensation)		Warm white 2700K : L27 : 2700K (645 lm/ Ra 93)	
Attachments : Mounting parts A (LTH-PTA) (2pcs/1bag)		Warm white 2400K : L24 : 2400K (598 lm/ Ra 93)	
Option parts : Power supply cable 3000mm,			
Joint cable 1000mm,			

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

RECTA

Luci RECTA

Luci RECTA 400




Luci Pte., Ltd.

2022.09.12


Front View




Side View 1

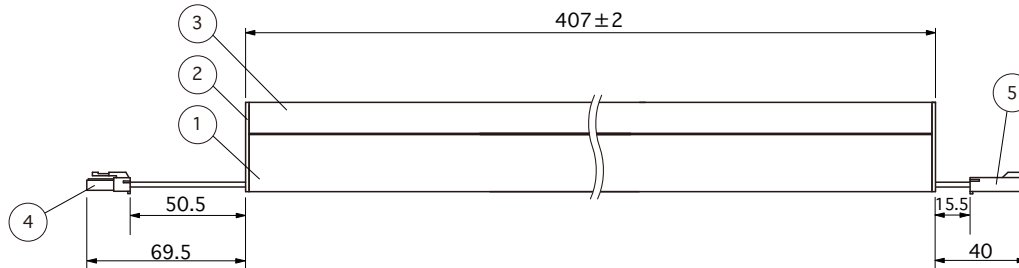


Side View 2




Accessories :
Mounting parts A (LTH-PTA)
(2pcs included, 2pcs/1bag)




Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)



Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)



Model number	L(mm)
CAD-1000-MCFC-I	1000±15
CAD-5000-MCFC-I	5000+250/-0

Installation Dimensions
(Side View)

Unit Of Measure : mm

The specifications and prices are subject to change without prior notice.

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Side cover	Polycarbonate	Diffuser	
3	Cover	Polycarbonate	Diffuser	
4	Connector	Nylon	UL94 V-2 White	
5	Connector	Nylon	UL94 V-2 White	
6	Mounting parts	Stainless steel	Silver	
7	Lead wire		UL1007 AWG20	
8				
9				

Spec	Input voltage : DC24V	Light Source color :	Item Number
Power consumption : 12.5W		Natural white : N : 5000K (952 lm/ Ra 92)	LRE-0407-N-DF-I LRE-0407-W-DF-I LRE-0407-WW-DF-I LRE-0407-L30-DF-I LRE-0407-L27-DF-I LRE-0407-L24-DF-I
Weight : 180g		White : W : 4000K (952 lm/ Ra 92)	
Lamp fitting length(L) : 407mm		Warm white 3500K : WW : 3500K (921 lm/ Ra 93)	
Max. sets connectable : 3.3m		Warm white 3000K : L30 : 3000K (890 lm/ Ra 94)	
Environment : Indoors (No Condensation)		Warm white 2700K : L27 : 2700K (860 lm/ Ra 93)	
Attachments : Mounting parts A (LTH-PTA) (2pcs/1bag)		Warm white 2400K : L24 : 2400K (798 lm/ Ra 93)	
Option parts : Power supply cable 3000mm,			
Joint cable 1000mm,			

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

RECTA

Luci RECTA


Luci RECTA 500




Luci Pte., Ltd.

2022.09.12


Front View




Side View 1

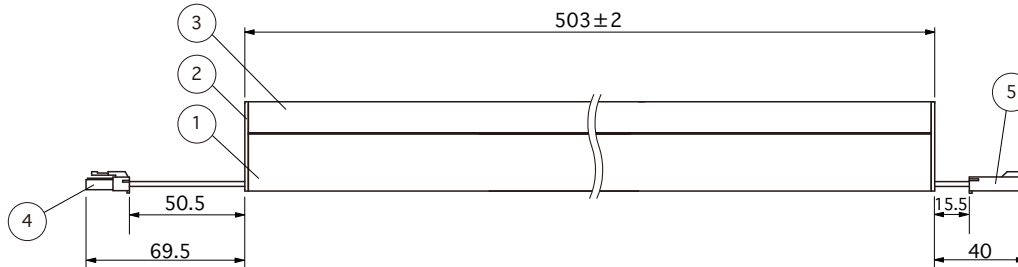

Side View 2



Accessories : Mounting parts A (LTH-PTA) (2pcs included, 2pcs/1bag)	Option parts : Power supply cable 3000mm for SL connector (CAD-3000-MCNN-I)					
	Option parts : Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)					
	<table border="1"> <thead> <tr> <th>Model number</th> <th>L(mm)</th> </tr> </thead> <tbody> <tr> <td>CAD-1000-MCFC-I</td> <td>1000±15</td> </tr> <tr> <td>CAD-5000-MCFC-I</td> <td>5000⁺²⁵⁰₀</td> </tr> </tbody> </table>	Model number	L(mm)	CAD-1000-MCFC-I	1000±15	CAD-5000-MCFC-I
Model number	L(mm)					
CAD-1000-MCFC-I	1000±15					
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀					



Unit Of Measure : mm

The specifications and prices are subject to change without prior notice.

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Side cover	Polycarbonate	Diffuser	
3	Cover	Polycarbonate	Diffuser	
4	Connector	Nylon	UL94 V-2 White	
5	Connector	Nylon	UL94 V-2 White	
6	Mounting parts	Stainless steel	Silver	
7	Lead wire		UL1007 AWG20	
8				
9				

Spec	Input voltage : DC24V	Light Source color :	Item Number
Power consumption : 15.6W		Natural white : N : 5000K (1190 lm/ Ra 92)	LRE-0503-N-DF-I LRE-0503-W-DF-I LRE-0503-WW-DF-I LRE-0503-L30-DF-I LRE-0503-L27-DF-I LRE-0503-L24-DF-I
Weight : 220g		White : W : 4000K (1190 lm/ Ra 92)	
Lamp fitting length(L) : 503mm		Warm white 3500K : WW : 3500K (1151 lm/ Ra 93)	
Max. sets connectable : 3.3m		Warm white 3000K : L30 : 3000K (1113 lm/ Ra 94)	
Environment : Indoors (No Condensation)		Warm white 2700K : L27 : 2700K (1075 lm/ Ra 93)	
Attachments : Mounting parts A (LTH-PTA) (2pcs/1bag)		Warm white 2400K : L24 : 2400K (998 lm/ Ra 93)	
Option parts : Power supply cable 3000mm,			
Joint cable 1000mm,			

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ

Hong Kong Marketing Office

Korea Office

Shanghai China mainland Regional HQ

Tel: +65-6291-2410

Tel: +852-2219-8462 / Fax: +852-2219-8461

Tel: +82-2-508-2541

Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

RECTA

Luci RECTA


Luci RECTA 600




Luci Pte., Ltd.

2022.09.12


Front View




Side View 1

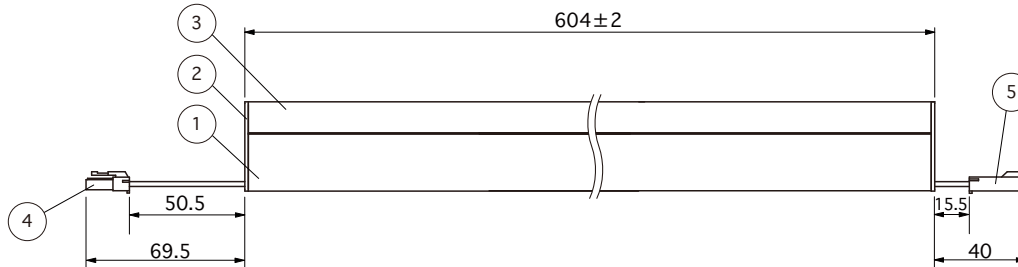

Side View 2



Accessories : Mounting parts A (LTH-PTA) (2pcs included, 2pcs/1bag)	Option parts : Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)					
	Option parts : Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)					
	<table border="1"> <thead> <tr> <th>Model number</th> <th>L(mm)</th> </tr> </thead> <tbody> <tr> <td>CAD-1000-MCFC-I</td> <td>1000±15</td> </tr> <tr> <td>CAD-5000-MCFC-I</td> <td>5000⁺²⁵⁰₀</td> </tr> </tbody> </table>	Model number	L(mm)	CAD-1000-MCFC-I	1000±15	CAD-5000-MCFC-I
Model number	L(mm)					
CAD-1000-MCFC-I	1000±15					
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀					

Installation Dimensions
(Side View)

Unit Of Measure : mm

The specifications and prices are subject to change without prior notice.

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Side cover	Polycarbonate	Diffuser	
3	Cover	Polycarbonate	Diffuser	
4	Connector	Nylon	UL94 V-2 White	
5	Connector	Nylon	UL94 V-2 White	
6	Mounting parts	Stainless steel	Silver	
7	Lead wire		UL1007 AWG20	
8				
9				

Spec	Input voltage : DC24V	Light Source color :	Item Number
Power consumption : 18.7W		Natural white : N : 5000K (1428 lm/ Ra 92)	LRE-0604-N-DF-I LRE-0604-W-DF-I LRE-0604-WW-DF-I LRE-0604-L30-DF-I LRE-0604-L27-DF-I LRE-0604-L24-DF-I
Weight : 260g		White : W : 4000K (1428 lm/ Ra 92)	
Lamp fitting length(L) : 604mm		Warm white 3500K : WW : 3500K (1381 lm/ Ra 93)	
Max. sets connectable : 3.3m		Warm white 3000K : L30 : 3000K (1335 lm/ Ra 94)	
Environment : Indoors (No Condensation)		Warm white 2700K : L27 : 2700K (1290 lm/ Ra 93)	
Attachments : Mounting parts A (LTH-PTA) (2pcs/1bag)		Warm white 2400K : L24 : 2400K (1197lm / Ra 93)	
Option parts : Power supply cable 3000mm,			
Joint cable 1000mm,			

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

RECTA

Luci RECTA


Luci RECTA 700




Luci Pte., Ltd.

2022.09.12


Front View







Side View 1

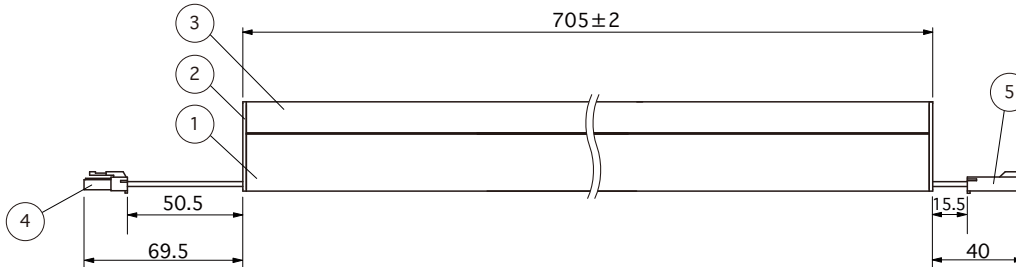

Side View 2

Accessories :
Mounting parts A (LTH-PTA)

(2pcs included, 2pcs/1bag)

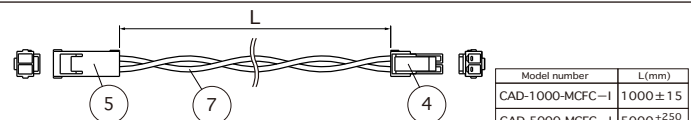Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)Installation Dimensions
(Side View)

Unit Of Measure : mm

The specifications and prices are subject to change without prior notice.

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Side cover	Polycarbonate	Diffuser	
3	Cover	Polycarbonate	Diffuser	
4	Connector	Nylon	UL94 V-2 White	
5	Connector	Nylon	UL94 V-2 White	
6	Mounting parts	Stainless steel	Silver	
7	Lead wire		UL1007 AWG20	
8				
9				

Spec	Input voltage : DC24V	Light Source color :	Item Number
Power consumption : 21.8W		Natural white : N : 5000K (1666 lm/ Ra 92)	LRE-0705-N-DF-I LRE-0705-W-DF-I LRE-0705-WW-DF-I LRE-0705-L30-DF-I LRE-0705-L27-DF-I LRE-0705-L24-DF-I
Weight : 310g		White : W : 4000K (1666 lm/ Ra 92)	
Lamp fitting length(L) : 705mm		Warm white 3500K : WW : 3500K (1612 lm/ Ra 93)	
Max. sets connectable : 3.3m		Warm white 3000K : L30 : 3000K (1558 lm/ Ra 94)	
Environment : Indoors (No Condensation)		Warm white 2700K : L27 : 2700K (1505 lm/ Ra 93)	
Attachments : Mounting parts A (LTH-PTA) (2pcs/1bag)		Warm white 2400K : L24 : 2400K (1397 lm/ Ra 93)	
Option parts : Power supply cable 3000mm,			
Joint cable 1000mm,			

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

RECTA

Luci RECTA


Luci RECTA 800




Luci Pte., Ltd.

2022.09.12


Front View




Side View 1

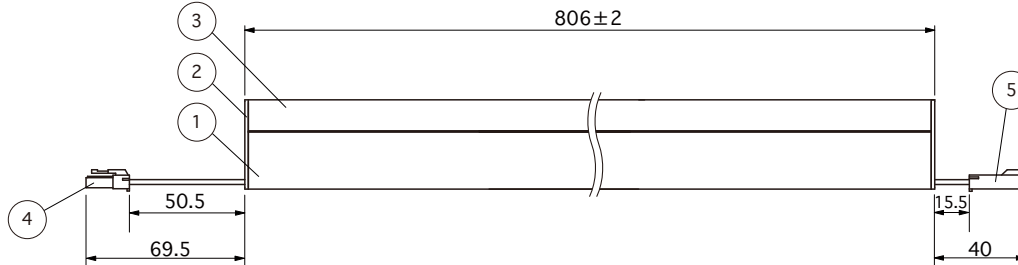

Side View 2



Accessories : Mounting parts A (LTH-PTA) (2pcs included, 2pcs/1bag)	Option parts : Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I) Check the label on the DC + side for polarity. Option parts : Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I) <table border="1"> <thead> <tr> <th>Model number</th><th>L(mm)</th></tr> </thead> <tbody> <tr> <td>CAD-1000-MCFC-I</td><td>1000±15</td></tr> <tr> <td>CAD-5000-MCFC-I</td><td>5000+250/-0</td></tr> </tbody> </table>	Model number	L(mm)	CAD-1000-MCFC-I	1000±15	CAD-5000-MCFC-I	5000+250/-0
Model number	L(mm)						
CAD-1000-MCFC-I	1000±15						
CAD-5000-MCFC-I	5000+250/-0						

Installation Dimensions
(Side View)

Unit Of Measure : mm

The specifications and prices are subject to change without prior notice.

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Side cover	Polycarbonate	Diffuser	
3	Cover	Polycarbonate	Diffuser	
4	Connector	Nylon	UL94 V-2 White	
5	Connector	Nylon	UL94 V-2 White	
6	Mounting parts	Stainless steel	Silver	
7	Lead wire		UL1007 AWG20	
8				
9				

Spec	Input voltage : DC24V	Light Source color :	Item Number
Power consumption : 24.9W		Natural white : N : 5000K (1904 lm/ Ra 92)	LRE-0806-N-DF-I LRE-0806-W-DF-I LRE-0806-WW-DF-I LRE-0806-L30-DF-I LRE-0806-L27-DF-I LRE-0806-L24-DF-I
Weight : 350g		White : W : 4000K (1904 lm/ Ra 92)	
Lamp fitting length(L) : 806mm		Warm white 3500K : WW : 3500K (1842 lm/ Ra 93)	
Max. sets connectable : 3.3m		Warm white 3000K : L30 : 3000K (1780 lm/ Ra 94)	
Environment : Indoors (No Condensation)		Warm white 2700K : L27 : 2700K (1720 lm/ Ra 93)	
Attachments : Mounting parts A (LTH-PTA) (2pcs/1bag)		Warm white 2400K : L24 : 2400K (1596 lm/ Ra 93)	
Option parts : Power supply cable 3000mm,			
Joint cable 1000mm,			

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

RECTA

Luci RECTA


Luci RECTA 900




Luci Pte., Ltd.

2022.09.12


Front View







Side View 1

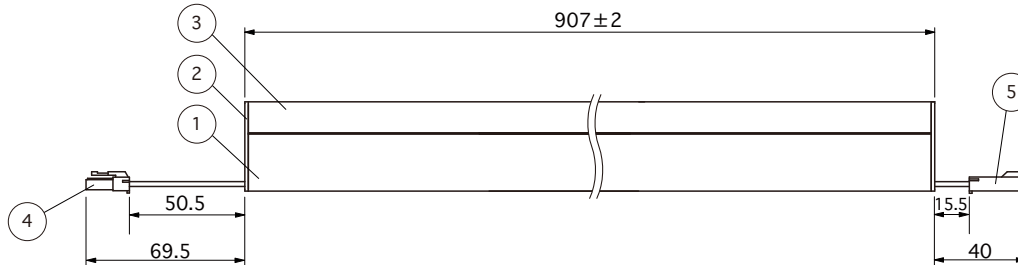

Side View 2

Accessories :
Mounting parts A (LTH-PTA)

(2pcs included, 2pcs/1bag)

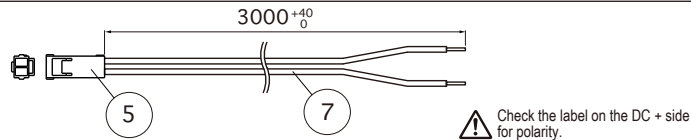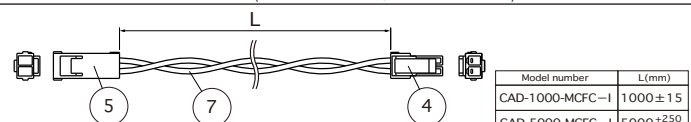Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCNN-I)Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)Installation Dimensions
(Side View)

Unit Of Measure : mm

The specifications and prices are subject to change without prior notice.

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Side cover	Polycarbonate	Diffuser	
3	Cover	Polycarbonate	Diffuser	
4	Connector	Nylon	UL94 V-2 White	
5	Connector	Nylon	UL94 V-2 White	
6	Mounting parts	Stainless steel	Silver	
7	Lead wire		UL1007 AWG20	
8				
9				

Spec	Input voltage : DC24V	Light Source color :	Item Number
Power consumption : 28.0W		Natural white : N : 5000K (2142 lm/ Ra 92)	LRE-0907-N-DF-I LRE-0907-W-DF-I LRE-0907-WW-DF-I LRE-0907-L30-DF-I LRE-0907-L27-DF-I LRE-0907-L24-DF-I
Weight : 390g		White : W : 4000K (2142 lm/ Ra 92)	
Lamp fitting length(L) : 907mm		Warm white 3500K : WW : 3500K (2072 lm/ Ra 93)	
Max. sets connectable : 3.3m		Warm white 3000K : L30 : 3000K (2003 lm/ Ra 94)	
Environment : Indoors (No Condensation)		Warm white 2700K : L27 : 2700K (1935 lm/ Ra 93)	
Attachments : Mounting parts A (LTH-PTA) (2pcs/1bag)		Warm white 2400K : L24 : 2400K (1796 lm/ Ra 93)	
Option parts : Power supply cable 3000mm,			
Joint cable 1000mm,			

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

RECTA

Luci RECTA


Luci RECTA 1000

Luci Pte., Ltd.


2022.09.12




Front View







Side View 1

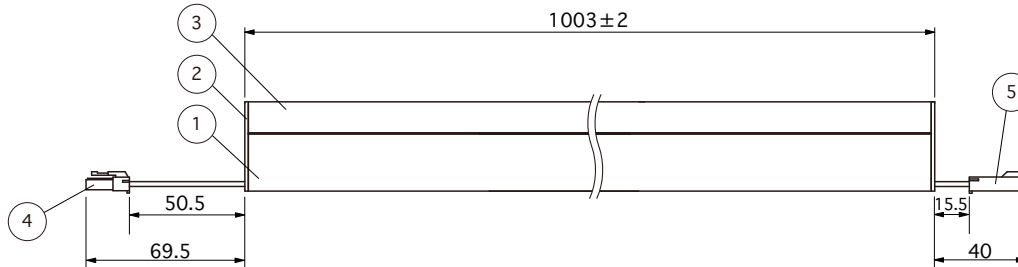

Side View 2

Accessories :
Mounting parts A (LTH-PTA)

(2pcs included, 2pcs/1bag)

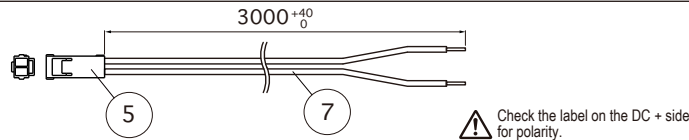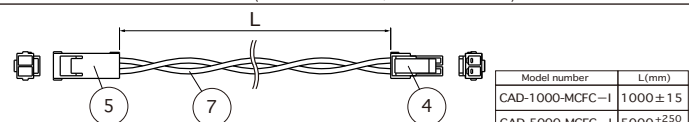Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)Installation Dimensions
(Side View)

Unit Of Measure : mm

The specifications and prices are subject to change without prior notice.

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Side cover	Polycarbonate	Diffuser	
3	Cover	Polycarbonate	Diffuser	
4	Connector	Nylon	UL94 V-2 White	
5	Connector	Nylon	UL94 V-2 White	
6	Mounting parts	Stainless steel	Silver	
7	Lead wire		UL1007 AWG20	
8				
9				

Spec	Input voltage : DC24V	Light Source color :	Item Number
Power consumption : 31.2W		Natural white : N : 5000K (2380 lm/ Ra 92)	LRE-1003-N-DF-I LRE-1003-W-DF-I LRE-1003-WW-DF-I LRE-1003-L30-DF-I LRE-1003-L27-DF-I LRE-1003-L24-DF-I
Weight : 420g		White : W : 4000K (2380 lm/ Ra 92)	
Lamp fitting length(L) : 1003mm		Warm white 3500K : WW : 3500K (2303 lm/ Ra 93)	
Max. sets connectable : 3.3m		Warm white 3000K : L30 : 3000K (2226 lm/ Ra 94)	
Environment : Indoors (No Condensation)		Warm white 2700K : L27 : 2700K (2150 lm/ Ra 93)	
Attachments : Mounting parts A (LTH-PTA) (2pcs/1bag)		Warm white 2400K : L24 : 2400K (1996 lm/ Ra 93)	
Option parts : Power supply cable 3000mm,			
Joint cable 1000mm,			

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp