

RECTA

Luci SHIN RECTA


Luci SHIN RECTA




Luci Pte., Ltd.

2025.01.27


Front View




Side View

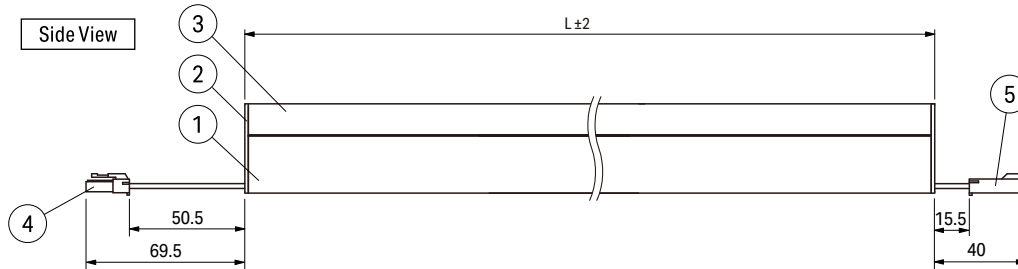


Side View




Attachment :
Mounting parts A (LTH-PTA)
2pcs : 103mm ~ 1003mm
3pcs : 1106mm ~ 1407mm
4pcs : 1502mm
Accessories :
Mounting parts A (LYH-PTA) 2pcs/1bag




Accessories :
Power supply cable 3000mm for SL connector (CAD-3000-MCNN-I)

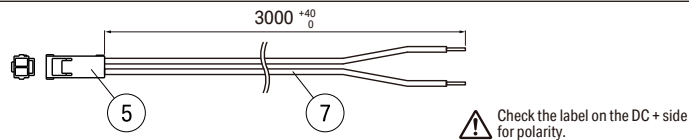

Accessories :
Joint cable 1000mm/5000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)

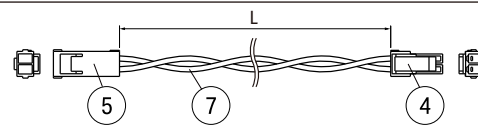

Model number	L(mm)
CAD-1000-MCFC-I	1000±15
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₋₀

Installation Dimensions
(Side View)

The specifications and prices are subject to change without prior notice.

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body	Anodised aluminium	Silver	
2	Side cover	Polycarbonate	Diffuser	
3	Cover	Polycarbonate	Diffuser	
4	Connector	Nylon	UL94 V-2 White	
5	Connector	Nylon	UL94 V-2 White	
6	Mounting parts	Stainless steel	Silver	
7	Lead wire		UL1007 AWG20	
8				
9				

Spec	Input voltage : DC24V	Light source color	Daylight white : D : 6500K	Model No.
	Wattage : _ W (Refer to appendix)		Natural white : N : 5000K	LREY-[Length]-[Light source color]-DF-I-[Wattage] 0103 D: 6500K 10: 10.1 W / m 0205 N: 5000K 21: 21.6 W / m 0306 W: 4000K 31: 31.6 W / m 0407 WW: 3500K 0503 L30: 3000K 0604 L27: 2700K 0705 L25: 2500K 0806 L22: 2200K 0907 L20: 2000K 1003 L18: 1800K 1106 1204 1306 1407 1502
	Max. length per circuit: 10.1 W/m 21.6 W/m : 5m / 31.6 W/m : 3m		White : W : 4000K	
	Weight : _ g (Refer to appendix)		Warm white 3500K : WW : 3500K	
	Environment : Indoors 0 ~ 35°C (No Condensation)		Warm white 3000K : L30 : 3000K	
	Attachments : Mounting parts A (LTH-PTA) (2pcs: 111mm~1011mm 4pcs: 1061mm~1411mm)		Warm white 2700K : L27 : 2700K	
	Accessories : Mounting parts A (LTH-PTA) (2pcs/1bag)		Warm white 2500K : L25 : 2500K	
	Power supply cable 3000mm		Warm white 2200K : L22 : 2200K	
	Joint cable 1000mm, 5000mm		Warm white 2000K : L20 : 2000K	
			Warm white 1800K : L18 : 1800K	

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd.

http://www.luci.co.jp

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.


Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / E-mail: info@luci.co.jp

Specifications [LREY]

LREY - [Length] - [Light source color] - DF- I - [Wattage]

Specifications by length

[Length]	Fitting length (L)	[Wattage]			Weight
		10.1W/m	21.6W/m	31.6W/m	
0103	103.0mm	1.0W	2.1W	3.2W	60g
0205	205.0mm	2.0W	4.3W	6.3W	100g
0306	306.0mm	3.0W	6.4W	9.5W	140g
0407	407.0mm	4.0W	8.6W	12.7W	180g
0503	503.0mm	5.0W	10.7W	15.8W	220g
0604	604.0mm	6.0W	12.9W	19.0W	260g
0705	705.0mm	7.1W	15.0W	22.1W	300g
0806	806.0mm	8.1W	17.2W	25.3W	340g
0907	907.0mm	9.1W	19.3W	28.5W	380g
1003	1003.0mm	10.1W	21.5W	31.6W	420g
1106	1106.0mm	11.1W	23.6W	34.8W	460g
1204	1204.0mm	12.1W	25.8W	38.0W	500g
1306	1306.0mm	13.1W	27.9W	41.1W	540g
1407	1407.0mm	14.1W	30.1W	44.3W	580g
1502	1502.0mm	15.1W	32.2W	47.5W	620g

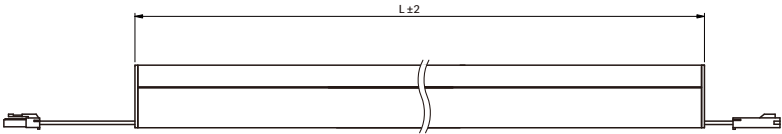

Photometry characteristic

Wattage 10 : 10.1W/m										
[Light source color]	D	N	W	WW	L30	L27	L25	L22	L20	L18
Luminous flux	1317lm/m	1305lm/m	1282lm/m	1270lm/m	1235lm/m	1166lm/m	862lm/m	804lm/m	734lm/m	711lm/m
Luminaire efficiency	130.6lm/W	129.5lm/W	127.2lm/W	126.0lm/W	122.5lm/W	115.6lm/W	85.5lm/W	79.8lm/W	72.8lm/W	70.5lm/W

Wattage 20 : 20.1W/m										
[Light source color]	D	N	W	WW	L30	L27	L25	L22	L20	L18
Luminous flux	2786lm/m	2762lm/m	2712lm/m	2688lm/m	2614lm/m	2466lm/m	1825lm/m	1701lm/m	1553lm/m	1504lm/m
Luminaire efficiency	129.6lm/W	128.5lm/W	126.2lm/W	125.0lm/W	121.6lm/W	114.7lm/W	84.9lm/W	79.1lm/W	72.3lm/W	70.0lm/W

Wattage 31 : 31.6W/m										
[Light source color]	D	N	W	WW	L30	L27	L25	L22	L20	L18
Luminous flux	3950lm/m	3916lm/m	3846lm/m	3811lm/m	3706lm/m	3496lm/m	2587lm/m	2412lm/m	2202lm/m	2133lm/m
Luminaire efficiency	124.9lm/W	123.8lm/W	121.6lm/W	120.4lm/W	117.1lm/W	110.5lm/W	81.8lm/W	76.2lm/W	69.6lm/W	67.4lm/W

[Light source color]	D	N	W	WW	L30	L27	L25	L22	L20	L18
CRI	Ra96	Ra93	Ra97	Ra97	Ra95	Ra94	Ra94	Ra93	Ra91	Ra90

The values are measured values, not guaranteed values.