

RIMiT flex series

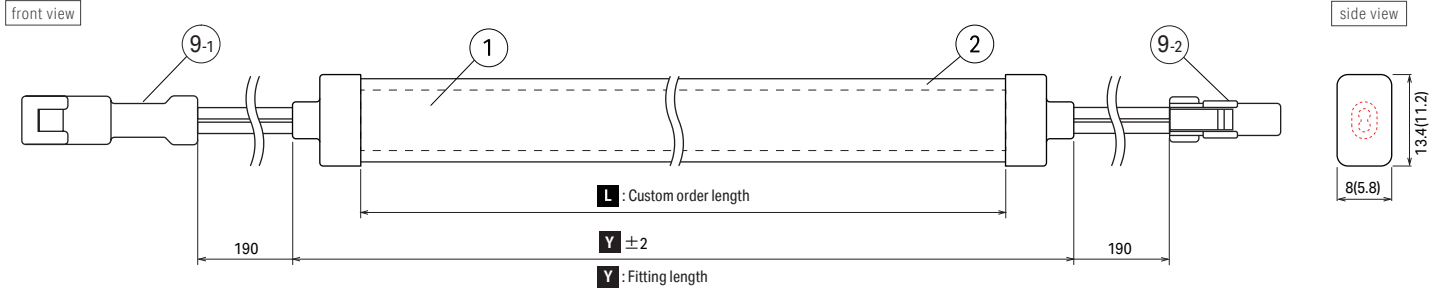
Luci RIMiT flex

Luci RIMiT flex IP65 (Both ends lead wire, Outdoor)




Luci Pte., Ltd.


2024.10.24








Installation dimensions (Side view)

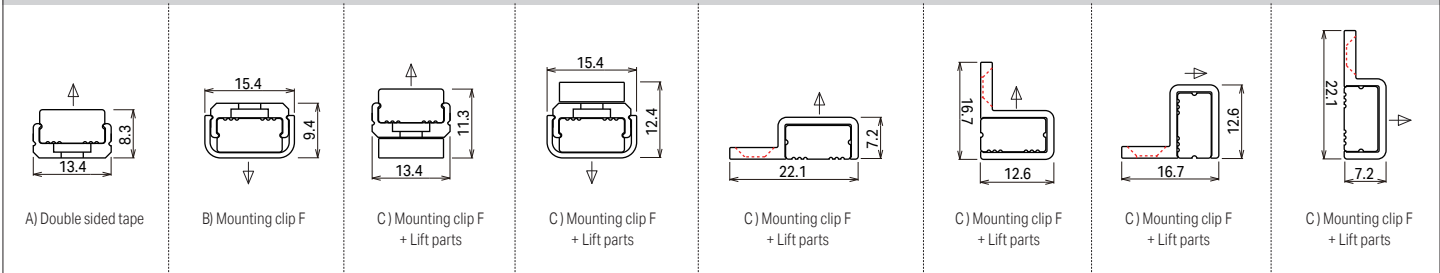

Connector

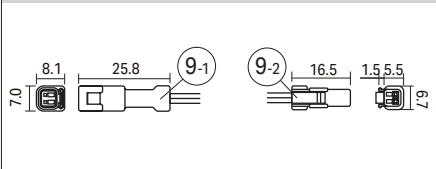

Accessories

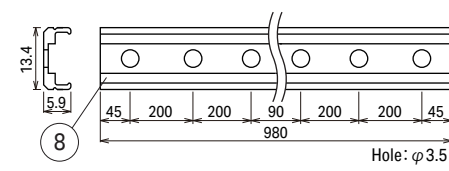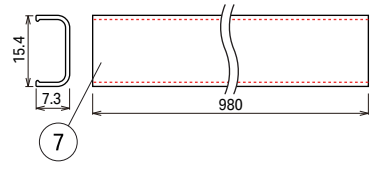Cable 5M TR Connector
(CAD-5000-MEFE-O)Mounting clip A for RIMiT flex
(LRF-PT-A) 5pcs/1bagMounting clip B for RIMiT flex
(LRF-PT-B) 5pcs/1bagMounting rail (LRF-RL1000)
Aluminum mounting rail (LRF-RL1000-AL)Rail cover for Mounting rail
(LRF-C1000)

Part Name	Material	Note	Drawing
1 Body		Flexible circuit board	
2 Tube	Silicone	Diffuser / White	
3 Cap	Silicone	Diffuser	
4 Lead wire	Copper, Vinyl	UL1007 AWG26 Black:+ White:-	
5 Mounting clip A	Polycarbonate	Clear	
6 Mounting clip B	Polycarbonate	Clear	
7 Rail cover	Polycarbonate	Clear	
8 Mounting rail	Polycarbonate / Aluminum	White / Alumite treatment, White painting	
9 Connector	Nylon	UL94V-0, White	
10 -	-	-	

Specifications	Light Source Color	Delivered CCT	Model Number
Input voltage : DC24V	Natural White N	4100K Ra 96 620 lm	LRF-T*W-N-DF-O-9
Wattage: 9.7W/m	White W	3400K Ra 91 642 lm	LRF-T*W-W-DF-O-9
Max. length per circuit : 4m	Warm white WW	3000K Ra 90 624 lm	LRF-T*W-WW-DF-O-9
Weight : 67g (@L1000)	Warm white L30	2700K Ra 90 566 lm	LRF-T*W-L30-DF-O-9
Environment : In/Outdoor (No Condensation) IP65	Warm white L27	2400K Ra 91 535 lm	LRF-T*W-L27-DF-O-9
Accessories : Mounting clip	Warm white L24	2200K Ra 89 491 lm	LRF-T*W-L24-DF-O-9
Mounting rail			
Aluminum mounting rail			
Rail cover			

Job / Project Name			Area / Location / Circuit No.
Product Code	Qty.	Length (mm)	
Luci Pte. Ltd.	http://www.luci.co.jp	E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ	Hong Kong Marketing Office	Korea Office	Shanghai China mainland Regional HQ
Tel: +65-6291-2410	Tel: +852-2219-8462	Tel: +82-2-508-2541	Tel: +86-21-5238-9115

RIMiT flex series

Luci RIMiT flex

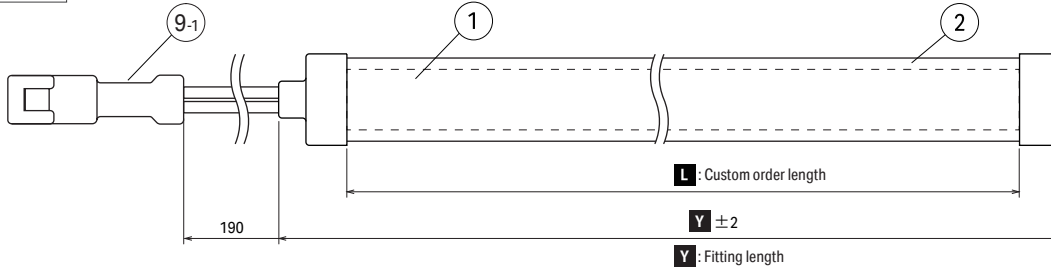
Luci RIMiT flex IP65 (One end lead wire, Outdoor)




Luci Pte., Ltd.

2024.10.24


front view




side view








Installation dimensions (Side view)

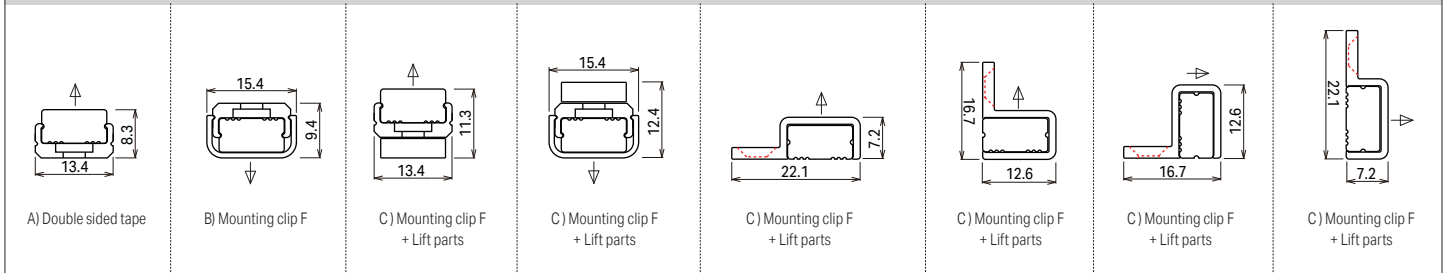

Connector



Accessories

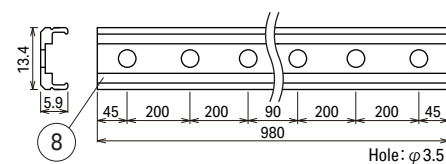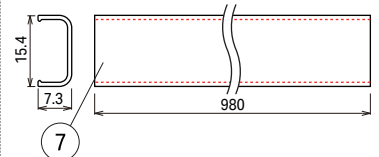Cable 5M TR Connector
(CAD-5000-MEFE-O)Mounting clip A for RIMiT flex
(LRF-PT-A) 5pcs/1bagMounting clip B for RIMiT flex
(LRF-PT-B) 5pcs/1bagMounting rail (LRF-RL1000)
Aluminum mounting rail (LRF-RL1000-AL)Rail cover for Mounting rail
(LRF-C1000)

Part Name	Material	Note	Drawing
1 Body		Flexible circuit board	
2 Tube	Silicone	Diffuser / White	
3 Cap	Silicone	Diffuser	
4 Lead wire	Copper, Vinyl	UL1007 AWG26 Black:+ White:-	
5 Mounting clip A	Polycarbonate	Clear	
6 Mounting clip B	Polycarbonate	Clear	
7 Rail cover	Polycarbonate	Clear	
8 Mounting rail	Polycarbonate / Aluminum	White / Alumite treatment, White painting	
9 Connector	Nylon	UL94V-0, White	
10 -	-	-	

Specifications	Light Source Color	Delivered CCT	Model Number
Input voltage: DC24V	Natural White N	4100K Ra 96	620 lm LRF-T*S-N-DF-O-9
Wattage: 9.7W/m	White W	3400K Ra 91	642 lm LRF-T*S-W-DF-O-9
Max. length per circuit: 4m	Warm white WW	3000K Ra 90	624 lm LRF-T*S-WW-DF-O-9
Weight: 67g (@L1000)	Warm white L30	2700K Ra 90	566 lm LRF-T*S-L30-DF-O-9
Environment: In/Outdoor (No Condensation)IP65	Warm white L27	2400K Ra 91	535 lm LRF-T*S-L27-DF-O-9
Accessories: Mounting clip	Warm white L24	2200K Ra 89	491 lm LRF-T*S-L24-DF-O-9
Mounting rail			
Aluminum mounting rail			
Rail cover			

Job / Project Name

Area / Location / Circuit No.

Product Code

Qty.

Length (mm)

Luci Pte. Ltd.
Singapore World HQ
Tel: +65-6291-2410<http://www.luci.co.jp>
Hong Kong Marketing Office
Tel: +852-2219-8462E-mail: info@luci.co.jp
Korea Office
Tel: +82-2-508-2541LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115

Luci RIMiT flex Indoor_ Custom order length


Length	length (mm) L	Fitting length (mm) Y		Wattage (W)
		Both ends	One end	
0025	25	47	43	0.2
0050	50	72	68	0.5
0075	75	97	93	0.7
0100	100	122	118	1.0
0125	125	147	143	1.2
0150	150	172	168	1.5
0175	175	197	193	1.7
0200	200	222	218	1.9
0225	225	247	243	2.2
0250	250	272	268	2.4
0275	275	297	293	2.7
0300	300	322	318	2.9
0325	325	347	343	3.1
0350	350	372	368	3.4
0375	375	397	393	3.6
0400	400	422	418	3.9
0425	425	447	443	4.1
0450	450	472	468	4.4
0475	475	497	493	4.6
0500	500	522	518	4.8
0525	525	547	543	5.1
0550	550	572	568	5.3
0575	575	597	593	5.6
0600	600	622	618	5.8
0625	625	647	643	6.1
0650	650	672	668	6.3
0675	675	697	693	6.5
0700	700	722	718	6.8
0725	725	747	743	7.0
0750	750	772	768	7.3
0775	775	797	793	7.5
0800	800	822	818	7.7
0825	825	847	843	8.0
0850	850	872	868	8.2
0875	875	897	893	8.5
0900	900	922	918	8.7
0925	925	947	943	9.0
0950	950	972	968	9.2
0975	975	997	993	9.4
1000	1000	1022	1018	9.7
1025	1025	1048	1044	9.9
1050	1050	1073	1069	10.2
1075	1075	1098	1094	10.4
1100	1100	1123	1119	10.6
1125	1125	1148	1144	10.9
1150	1150	1173	1169	11.1
1175	1175	1198	1194	11.4
1200	1200	1223	1219	11.6
1225	1225	1248	1244	11.9
1250	1250	1273	1269	12.1
1275	1275	1298	1294	12.3
1300	1300	1323	1319	12.6
1325	1325	1348	1344	12.8
1350	1350	1373	1369	13.1

Length	length (mm) L	Fitting length (mm) Y		Wattage (W)
		Both ends	One end	
1375	1375	1398	1394	13.3
1400	1400	1423	1419	13.6
1425	1425	1448	1444	13.8
1450	1450	1473	1469	14.0
1475	1475	1498	1494	14.3
1500	1500	1523	1519	14.5
1525	1525	1548	1544	14.8
1550	1550	1573	1569	15.0
1575	1575	1598	1594	15.2
1600	1600	1623	1619	15.5
1625	1625	1648	1644	15.7
1650	1650	1673	1669	16.0
1675	1675	1698	1694	16.2
1700	1700	1723	1719	16.5
1725	1725	1748	1744	16.7
1750	1750	1773	1769	16.9
1775	1775	1798	1794	17.2
1800	1800	1823	1819	17.4
1825	1825	1848	1844	17.7
1850	1850	1873	1869	17.9
1875	1875	1898	1894	18.2
1900	1900	1923	1919	18.4
1925	1925	1948	1944	18.6
1950	1950	1973	1969	18.9
1975	1975	1998	1994	19.1
2000	2000	2023	2019	19.4
2025	2025	2048	2044	19.6
2050	2050	2073	2069	19.8
2075	2075	2098	2094	20.1
2100	2100	2123	2119	20.3
2125	2125	2148	2144	20.6
2150	2150	2173	2169	20.8
2175	2175	2198	2194	21.1
2200	2200	2223	2219	21.3
2225	2225	2248	2244	21.5
2250	2250	2273	2269	21.8
2275	2275	2298	2294	22.0
2300	2300	2323	2319	22.3
2325	2325	2348	2344	22.5
2350	2350	2373	2369	22.7
2375	2375	2398	2394	23.0
2400	2400	2423	2419	23.2
2425	2425	2448	2444	23.5
2450	2450	2473	2469	23.7
2475	2475	2498	2494	24.0
2500	2500	2523	2519	24.2
2525	2525	2548	2544	24.4
2550	2550	2573	2569	24.7
2575	2575	2598	2594	24.9
2600	2600	2623	2619	25.2
2625	2625	2648	2644	25.4
2650	2650	2673	2669	25.7
2675	2675	2698	2694	25.9
2700	2700	2723	2719	26.1

Length	length (mm) L	Fitting length (mm) Y		Wattage (W)
		Both ends	One end	
2725	2725	2749	2745	26.4
2750	2750	2774	2770	26.6
2775	2775	2799	2795	26.9
2800	2800	2824	2820	27.1
2825	2825	2849	2845	27.3
2850	2850	2874	2870	27.6
2875	2875	2899	2895	27.8
2900	2900	2924	2920	28.1
2925	2925	2949	2945	28.3
2950	2950	2974	2970	28.6
2975	2975	2999	2995	28.8
3000	3000	3024	3020	29.0
3025	3025	3050	3046	29.3
3050	3050	3075	3071	29.5
3075	3075	3100	3096	29.8
3100	3100	3125	3121	30.0
3125	3125	3150	3146	30.3
3150	3150	3175	3171	30.5
3175	3175	3200	3196	30.7
3200	3200	3225	3221	31.0
3225	3225	3250	3246	31.2
3250	3250	3275	3271	31.5
3275	3275	3300	3296	31.7
3300	3300	3325	3321	31.9
3325	3325	3350	3346	32.2
3350	3350	3375	3371	32.4
3375	3375	3400	3396	32.7
3400	3400	3425	3421	32.9
3425	3425	3450	3446	33.2
3450	3450	3475	3471	33.4
3475	3475	3500	3496	33.6
3500	3500	3525	3521	33.9
3525	3525	3550	3546	34.1
3550	3550	3575	3571	34.4
3575	3575	3600	3596	34.6
3600	3600	3625	3621	34.8
3625	3625	3650	3646	35.1
3650	3650	3675	3671	35.3
3675	3675	3700	3696	35.6
3700	3700	3725	3721	35.8
3725	3725	3750	3746	36.1
3750	3750	3775	3771	36.3
3775	3775	3800	3796	36.5
3800	3800	3825	3821	36.8
3825	3825	3850	3846	37.0
3850	3850	3875	3871	37.3
3875	3875	3900	3896	37.5
3900	3900	3925	3921	37.8
3925	3925	3950	3946	38.0
3950	3950	3975	3971	38.2
3975	3975	4000	3996	38.5
4000	4000	4025	4021	38.7

External dimensions

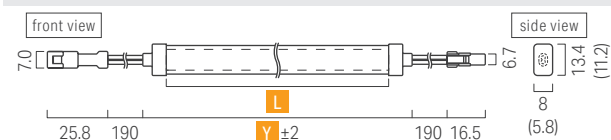Luci RIMiT flex / Outdoor, Both ends lead wire



Luci RIMiT flex / Outdoor, One end lead wire

