
**L** : Custom order length (108 - 1008mm)


Pendant mounting (ceiling)

Mounting with Hanging bracket for RIMiT (LRM-PT-K) (The pendant fittings are pre-set at 15mm from both ends of the lighting fixture).

The wires are attached at 15 mm ± 1 mm from both ends of the LED fixture.




Attach the washers of the Hanging bracket to the LED fixture at both ends (2 points at each end) with screws (recommended: flat head screw M3 available at local markets). Secure the hanging bracket by rotating its body to lock it firmly in position.



Attach the LED fixture by inserting the wires into the Hanging bracket and adjust the installation height at both ends (2 points at each end). Cut off and dispose any excessive wires.


Instruction for RIMiT lead wire clips usage

Enlarged view (cross-section)




Attachments / Accessories


Lead and Wire clip for RIMiT (LRM-PT-H) 5pcs/1bag



Accessories

Hanging bracket for RIMiT (LRM-PT-K) 2pcs/1bag



Part Name		Material	Note	Drawing	
1	Body	Aluminum	Alumite treatment, White painting		
2	Cover	Polycarbonate	Diffuser		
3	Side cover	ABS	White		
4	Lead wire		UL1007 AWG26 Grey:+ Grey:-		
5	Wire	Stainless steel	Φ8, Silver		
6	Lead and Wire clip	Polycarbonate	Clear		
7	Hanging bracket	Brass, Steel, Stainless steel	Nickel-plated, Chrome-plated, Silver		
8					
9					
10					
Specifications		Light Source Color	Delivered CCT	Model Number	
Input voltage : DC24V		Natural White N	4600K Ra 92	484 lm	LRMUS-T*S-N-DF-I-6(P)
Wattage: 6.4W/m		White W	3700K Ra 91	474 lm	LRMUS-T*S-W-DF-I-6(P)
Max. length per circuit : Not connectable		Warm white WW	3300K Ra 93	440 lm	LRMUS-T*S-WW-DF-I-6(P)
Weight : 70g (@L1008)		Warm white L30	2900K Ra 92	440 lm	LRMUS-T*S-L30-DF-I-6(P)
Environment : Indoor (No Condensation)		Warm white L27	2600K Ra 92	412 lm	LRMUS-T*S-L27-DF-I-6(P)
Accessories : Lead and Wire clip		Warm white L24	2400K Ra 92	380 lm	LRMUS-T*S-L24-DF-I-6(P)
Hanging bracket					
Job / Project Name				Area / Location / Circuit No.	
Product Code		Qty.	Length (mm)		
Luci Pte. Ltd.		http://www.luci.co.jp		LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD. Shanghai China mainland Regional HQ Tel: +86-21-5238-9115	
Singapore World HQ		Hong Kong Marketing Office			
Tel: +65-6291-2410		Tel: +852-2219-8462			
		E-mail: info@luci.co.jp			
		Korea Office			
		Tel: +82-2-508-2541			

RIMiT series

Luci RIMiT kk


Luci RIMiT kk (One end lead wire, Pendant)




Luci Pte., Ltd.

2024.08.01


front view



side view

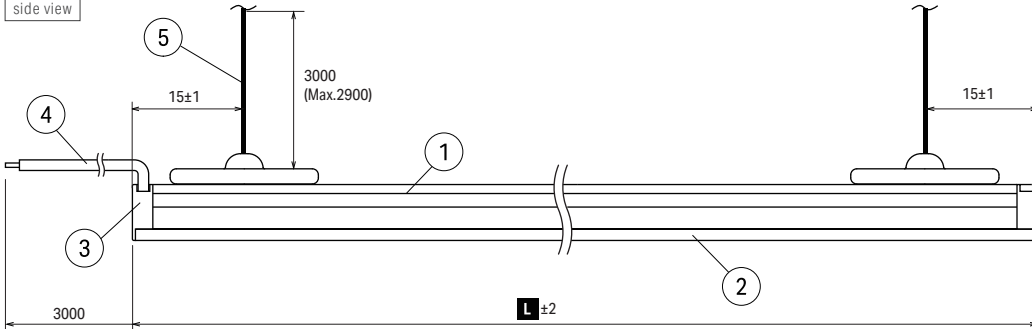


side view


**L** : Custom order length (108 - 1008mm)

Pendant mounting (ceiling)

Mounting with Hanging bracket for RIMiT (LRM-PT-K) (The pendant fittings are pre-set at 15mm from both ends of the lighting fixture).
The wires are attached at 15 mm \pm 1 mm from both ends of the LED fixture.



Attach the washers of the Hanging bracket to the LED fixture at both ends (2 points at each end) with screws (recommended: flat head screw M3 available at local markets). Secure the hanging bracket by rotating its body to lock it firmly in position.




Attach the LED fixture by inserting the wires into the Hanging bracket and adjust the installation height at both ends (2 points at each end). Cut off and dispose any excessive wires.

Instruction for RIMiT lead wire clips usage


Enlarged view (cross-section)

Attachments **Accessories**
Lead and Wire clip for RIMiT (LRM-PT-H)




Attachments / Accessories

Lead and Wire clip for RIMiT (LRM-PT-H) 5pcs/1bag




Accessories

Hanging bracket for RIMiT (LRM-PT-K) 2pcs/1bag




Part Name		Material	Note	Drawing
1	Body	Aluminum	Alumite treatment, White painting	
2	Cover	Polycarbonate	Diffuser	
3	Side cover	ABS	White	
4	Lead wire		UL1007 AWG26 Grey:+ Grey:-	
5	Wire	Stainless steel	Φ8, Silver	
6	Lead and Wire clip	Polycarbonate	Clear	
7	Hanging bracket	Brass, Steel, Stainless steel	Nickel-plated, Chrome-plated, Silver	
8				
9				
10				
Specifications		Light Source Color	Delivered CCT	Model Number
Input voltage : DC24V		Natural White N	4600K Ra 94 416 lm	LRMKK-T*S-N-DF-I-6(P)
Wattage: 6.4W/m		White W	3700K Ra 92 401 lm	LRMKK-T*S-W-DF-I-6(P)
Max. length per circuit : Not connectable		Warm white WW	3300K Ra 94 366 lm	LRMKK-T*S-WW-DF-I-6(P)
Weight : 77g (@L1008)		Warm white L30	2900K Ra 92 355 lm	LRMKK-T*S-L30-DF-I-6(P)
Environment : Indoor (No Condensation)		Warm white L27	2600K Ra 92 340 lm	LRMKK-T*S-L27-DF-I-6(P)
Accessories : Lead and Wire clip		Warm white L24	2400K Ra 91 338 lm	LRMKK-T*S-L24-DF-I-6(P)
Hanging bracket				
Job / Project Name				Area / Location / Circuit No.
<div></div>				<div></div>
Product Code		Qty.	Length (mm)	
<div></div>		<div></div>	<div></div>	
Luci Pte. Ltd.		http://www.luci.co.jp		LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ		Hong Kong Marketing Office		Shanghai China mainland Regional HQ
Tel: +65-6291-2410		Tel: +852-2219-8462		Tel: +86-21-5238-9115


front view



side view

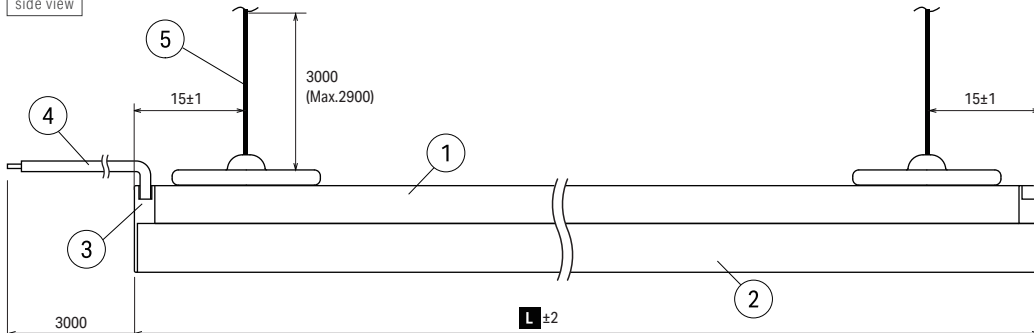


side view

**L** : Custom order length (108 - 1008mm)


Pendant mounting (ceiling)

Mounting with Hanging bracket for RIMiT (LRM-PT-K) (The pendant fittings are pre-set at 15mm from both ends of the lighting fixture).

The wires are attached at 15 mm ± 1 mm from both ends of the LED fixture.



Attach the washers of the Hanging bracket to the LED fixture at both ends (2 points at each end) with screws (recommended: flat head screw M3 available at local markets). Secure the hanging bracket by rotating its body to lock it firmly in position.




Attach the LED fixture by inserting the wires into the Hanging bracket and adjust the installation height at both ends (2 points at each end). Cut off and dispose any excessive wires.

Instruction for RIMiT lead wire clips usage


Enlarged view (cross-section)

Attachments **Accessories**
Lead and Wire clip for RIMiT (LRM-PT-H)




Attachments / Accessories


Lead and Wire clip for RIMiT (LRM-PT-H) 5pcs/1bag



Accessories

Hanging bracket for RIMiT (LRM-PT-K) 2pcs/1bag



Part Name	Material	Note	Drawing
1 Body	Aluminum	Alumite treatment, White painting	
2 Cover	Polycarbonate	Diffuser	
3 Side cover	ABS	White	
4 Lead wire		UL1007 AWG26 Grey:+ Grey:-	
5 Wire	Stainless steel	Φ8, Silver	
6 Lead and Wire clip	Polycarbonate	Clear	
7 Hanging bracket	Brass, Steel, Stainless steel	Nickel-plated, Chrome-plated, Silver	
8			
9			
10			

Specifications	Light Source Color	Delivered CCT	Model Number
Input voltage: DC24V	Natural White N	4600K Ra 92	518 lm LRMSM-T*S-N-DF-I-6(P)
Wattage: 6.4W/m	White W	3700K Ra 92	512 lm LRMSM-T*S-W-DF-I-6(P)
Max. length per circuit: Not connectable	Warm white WW	3300K Ra 92	486 lm LRMSM-T*S-WW-DF-I-6(P)
Weight: 80g (@L1008)	Warm white L30	2900K Ra 91	478 lm LRMSM-T*S-L30-DF-I-6(P)
Environment: Indoor (No Condensation)	Warm white L27	2600K Ra 91	454 lm LRMSM-T*S-L27-DF-I-6(P)
Accessories: Lead and Wire clip	Warm white L24	2400K Ra 92	416 lm LRMSM-T*S-L24-DF-I-6(P)
Hanging bracket			

Job / Project Name

Area / Location / Circuit No.

Product Code

Qty.

Length (mm)

Luci Pte. Ltd.
Singapore World HQ
Tel: +65-6291-2410

<http://www.luci.co.jp>
Hong Kong Marketing Office
Tel: +852-2219-8462

E-mail: info@luci.co.jp
Korea Office
Tel: +82-2-508-2541

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115

RIMiT series

Luci RIMiT mr


Luci RIMiT mr (One end lead wire, Pendant)




Luci Pte., Ltd.

2024.08.01


front view



side view

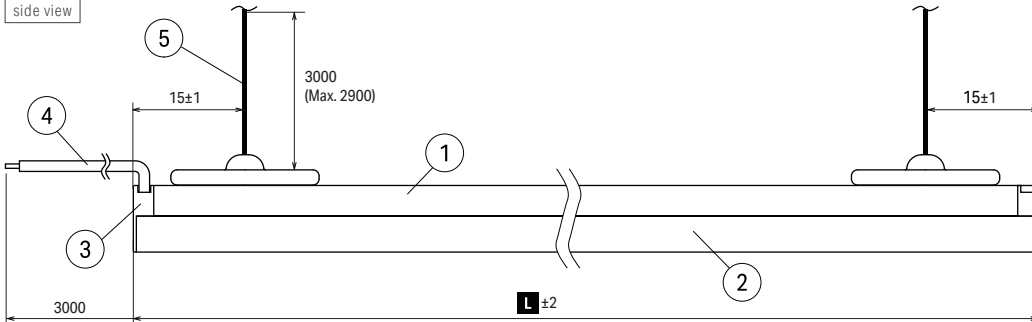


side view




Pendant mounting (ceiling)

Mounting with Hanging bracket for RIMiT (LRM-PT-K) (The pendant fittings are pre-set at 15mm from both ends of the lighting fixture).
The wires are attached at 15 mm ± 1 mm from both ends of the LED fixture.




Attach the washers of the Hanging bracket to the LED fixture at both ends (2 points at each end) with screws (recommended: flat head screw M3 available at local markets). Secure the hanging bracket by rotating its body to lock it firmly in position.



Attach the LED fixture by inserting the wires into the Hanging bracket and adjust the installation height at both ends (2 points at each end). Cut off and dispose any excessive wires.


Instruction for RIMiT lead wire clips usage

Enlarged view (cross-section)




Attachments / Accessories


Lead and Wire clip for RIMiT (LRM-PT-H) 5pcs/1bag




Accessories

Hanging bracket for RIMiT (LRM-PT-K) 2pcs/1bag




	Part Name	Material	Note	Drawing	
1	Body	Aluminum	Alumite treatment, White painting		
2	Cover	Polycarbonate	Diffuser		
3	Side cover	ABS	White		
4	Lead wire		UL1007 AWG26 Grey:+ Grey:-		
5	Wire	Stainless steel	Φ8, Silver		
6	Lead and Wire clip	Polycarbonate	Clear		
7	Hanging bracket	Brass, Steel, Stainless steel	Nickel-plated, Chrome-plated, Silver		
8					
9					
10					
Specifications		Light Source Color	Delivered CCT	Model Number	
Input voltage : DC24V		Natural White N	4600K Ra 91	538 lm	LRMMR-T*S-N-DF-I-6(P)
Wattage: 6.4W/m		White W	3700K Ra 92	541 lm	LRMMR-T*S-W-DF-I-6(P)
Max. length per circuit : Not connectable		Warm white WW	3300K Ra 92	512 lm	LRMMR-T*S-WW-DF-I-6(P)
Weight : 65g (@L1008)		Warm white L30	2900K Ra 91	503 lm	LRMMR-T*S-L30-DF-I-6(P)
Environment : Indoor (No Condensation)		Warm white L27	2600K Ra 92	470 lm	LRMMR-T*S-L27-DF-I-6(P)
Accessories : Lead and Wire clip		Warm white L24	2400K Ra 91	439 lm	LRMMR-T*S-L24-DF-I-6(P)
Hanging bracket					
Job / Project Name				Area / Location / Circuit No.	
<div></div>				<div></div>	
Product Code		Qty.	Length (mm)		
<div></div>		<div></div>	<div></div>		
Luci Pte. Ltd.		http://www.luci.co.jp		E-mail: info@luci.co.jp	
Singapore World HQ		Hong Kong Marketing Office		Korea Office	
Tel: +65-6291-2410		Tel: +852-2219-8462		Tel: +82-2-508-2541	
				LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.	
				Shanghai China mainland Regional HQ	
				Tel: +86-21-5238-9115	

front view




side view

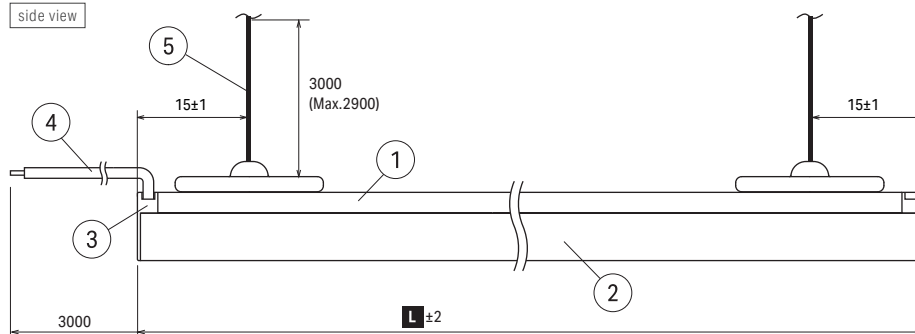

L : Custom order length (108 - 1008mm)


side view




Pendant mounting (ceiling)

Mounting with Hanging bracket for RIMiT (LRM-PT-K) (The pendant fittings are pre-set at 15mm from both ends of the lighting fixture).

The wires are attached at 15 mm ± 1 mm from both ends of the LED fixture.



Attach the washers of the Hanging bracket to the LED fixture at both ends (2 points at each end) with screws (recommended: flat head screw M3 available at local markets). Secure the hanging bracket by rotating its body to lock it firmly in position.




Attach the LED fixture by inserting the wires into the Hanging bracket and adjust the installation height at both ends (2 points at each end). Cut off and dispose any excessive wires.

Instruction for RIMiT lead wire clips usage


Enlarged view (cross-section)

Attachments Accessories
Lead and Wire clip for RIMiT (LRM-PT-H)




Attachments / Accessories


Lead and Wire clip for RIMiT (LRM-PT-H) 5pcs/1bag



Accessories

Hanging bracket for RIMiT (LRM-PT-K) 2pcs/1bag



Part Name	Material	Note	Drawing
1 Body	Aluminum	Alumite treatment, White painting	
2 Cover	Polycarbonate	Diffuser	
3 Side cover	ABS	White	
4 Lead wire		UL1007 AWG26 Grey;+ Grey;-	
5 Wire	Stainless steel	Φ8, Silver	
6 Lead and Wire clip	Polycarbonate	Clear	
7 Hanging bracket	Brass, Steel, Stainless steel	Nickel-plated, Chrome-plated, Silver	
8			
9			
10			

Specifications	Light Source Color	Delivered CCT	Model Number
Input voltage: DC24V	Natural White N	4600K Ra 91	582 lm LRMSA-T*S-N-DF-I-6(P)
Wattage: 6.4W/m	White W	3700K Ra 91	572 lm LRMSA-T*S-W-DF-I-6(P)
Max. length per circuit: Not connectable	Warm white WW	3300K Ra 92	545 lm LRMSA-T*S-WW-DF-I-6(P)
Weight: 78g (@L1008)	Warm white L30	2900K Ra 91	544 lm LRMSA-T*S-L30-DF-I-6(P)
Environment: Indoor (No Condensation)	Warm white L27	2600K Ra 91	506 lm LRMSA-T*S-L27-DF-I-6(P)
Accessories: Lead and Wire clip	Warm white L24	2400K Ra 92	473 lm LRMSA-T*S-L24-DF-I-6(P)
Hanging bracket			

Job / Project Name

Area / Location / Circuit No.

Product Code

Qty.

Length (mm)

Luci Pte. Ltd.
Singapore World HQ
Tel: +65-6291-2410


<http://www.luci.co.jp>
Hong Kong Marketing Office
Tel: +852-2219-8462

E-mail: info@luci.co.jp
Korea Office
Tel: +82-2-508-2541


LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115

front view

side view

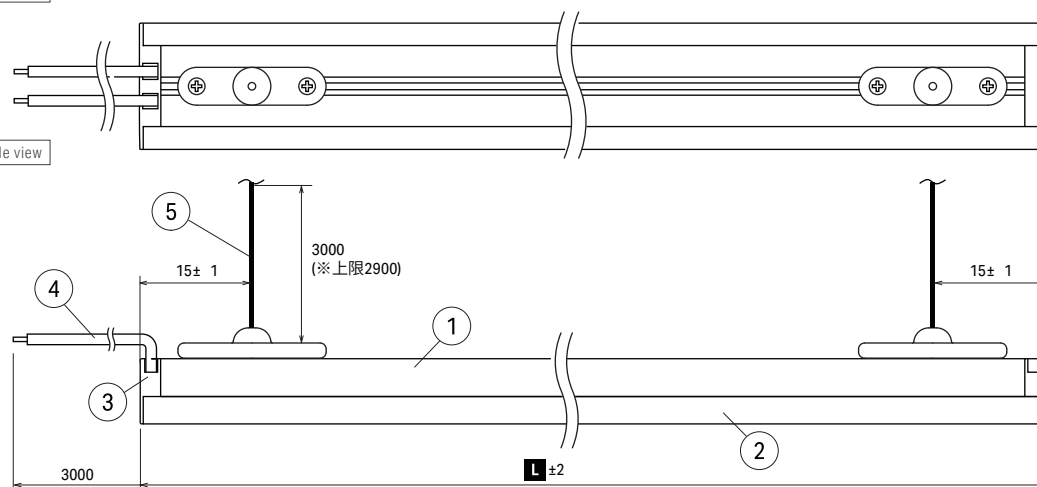

side view





L : Custom order length

Installing the product

Mounting with Hanging bracket for RIMiT (LRM-PT-K) (The pendant fittings are pre-set at 15mm from both ends of the lighting fixture).

The wires are attached at 15 mm ± 1 mm from both ends of the LED fixture.



Attach the washers of the Hanging bracket to the LED fixture at both ends (2 points at each end) with screws (recommended: flat head screw M3 available at local markets). Secure the hanging bracket by rotating its body to lock it firmly in position.


Attach the LED fixture by inserting the wires into the Hanging bracket and adjust the installation height at both ends (2 points at each end). Cut off and dispose any excessive wires.

Instructions for RIMiT and Wire clip for RIMiT

Enlarged view (cross-section)


Attachments Accessories

Lead and Wire clip for RIMiT (LRM-PT-H)




Attachments / Accessories


Lead and Wire clip for RIMiT (LRM-PT-H) 5pcs/1bag



Accessories

Hanging bracket for RIMiT (LRM-PT-K) 2pcs/1bag

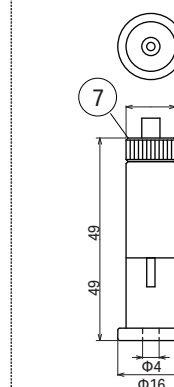

	Part Name	Material	Note	Drawing	
1	Body	Aluminum	Alumite treatment, White painting		
2	Cover	Polycarbonate	Diffuser		
3	Side cover	ABS	White		
4	Lead wire		UL1007 AWG26 Grey:+ Grey:-		
5	Wire	Stainless steel	Φ8, Silver		
6	Lead and Wire clip	Polycarbonate	Clear		
7	Hanging bracket	Brass, Steel, Stainless steel	Nickel-plated, Chrome-plated, Silver		
8					
9					
10					
Specifications		Light Source Color	Deliverd CCT	Model Number	
Input voltage : DC24V		Natural White N	4600K Ra 91	543 lm	LRMSK-T*S-N-DF-I-6(P)
Wattage: 6.4W/m		White W	3700K Ra 91	543 lm	LRMSK-T*S-W-DF-I-6(P)
Max. length per curcuit : Not connectable		Warm white WW	3300K Ra 91	522 lm	LRMSK-T*S-WW-DF-I-6(P)
Weight : 70g (@L1008)		Warm white L30	2900K Ra 92	494 lm	LRMSK-T*S-L30-DF-I-6(P)
Environment : Indoor (No Condensation)		Warm white L27	2600K Ra 91	510 lm	LRMSK-T*S-L27-DF-I-6(P)
Accessories : Lead and Wire clip		Warm white L24	2400K Ra 92	450 lm	LRMSK-T*S-L24-DF-I-6(P)
Hanging bracket					
Job / Project Name				Area / Location / Circuit No.	
Product Code		Qty.	Length (mm)		
Luci Pte. Ltd.		http://www.luci.co.jp		E-mail: info@luci.co.jp	
Singapore World HQ		Hong Kong Marketing Office		Korea Office	
Tel: +65-6291-2410		Tel: +852-2219-8462		Tel: +82-2-508-2541	
				LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.	
				Shanghai China mainland Regional HQ	
				Tel: +86-21-5238-9115	