

RIMiT series

Luci RIMiT hs


Luci RIMiT hs (Both ends lead wire)




Luci Pte. Ltd.

2025.02.03


front view




side view

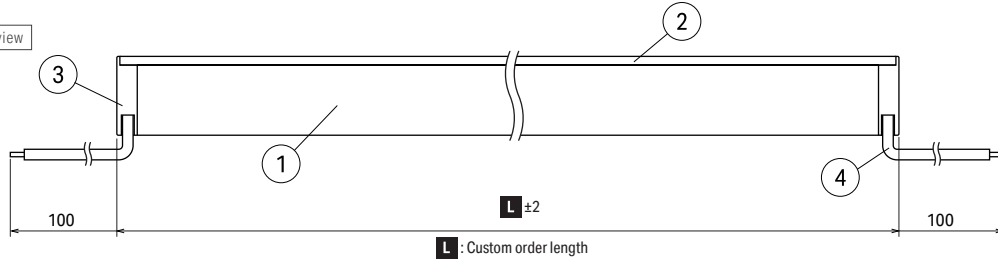

side view




Installation dimensions (Side view)

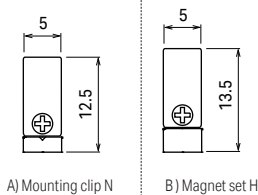


Accessories

Mounting clip N for RIMiT hs
(LRMHS-PT-N) 5pcs/1bag

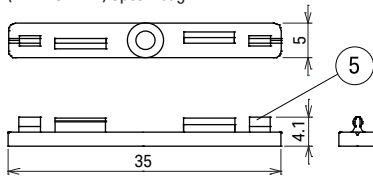

Recommended: Flat head screw M2.3

Magnet set H
(MG-H) 5pcs/1bag



Part Name	Material	Note	Drawing
1 Body	Aluminum	Alumite treatment, White painting	
2 Cover	Polycarbonate	Diffuser	
3 Side cover	ABS	White	
4 Lead wire		UL1007 AWG26 Black:+ White:-	
5 Mounting clip N for RIMiT hs	Polycarbonate	Clear	
6 Magnet set H	Neogium, Stainless steel	Silver	
7			
8			
9			
10			

Specifications	Light Source Color	Delivered CCT	Model Number
Input voltage : DC24V	Natural White N	4600K Ra 92 158 lm	LRMHS-T*W-N-DF-I-4
Wattage : 4.5W/m	White W	3700K Ra 91 139 lm	LRMHS-T*W-W-DF-I-4
Max. length per circuit : 3.5m	Warm white WW	3300K Ra 93 144 lm	LRMHS-T*W-WW-DF-I-4
Weight : 65g (@L1008)	Warm white L30	2900K Ra 92 136 lm	LRMHS-T*W-L30-DF-I-4
Environment : Indoor (No Condensation)	Warm white L27	2600K Ra 92 125 lm	LRMHS-T*W-L27-DF-I-4
Accessories : Mounting clip N for RIMiThs	Warm white L24	2400K Ra 91 110 lm	LRMHS-T*W-L24-DF-I-4
Magnet set H			

Job / Project Name

Area / Location / Circuit No.

Product Code

Qty.

Length (mm)

Luci Pte. Ltd.

Singapore World HQ
Tel: +65-6291-2410

http://www.luci.co.jp

Hong Kong Marketing Office
Tel: +852-2219-8462


E-mail: info@luci.co.jp

Korea Office
Tel: +82-2-508-2541


LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115


front view




side view




side view

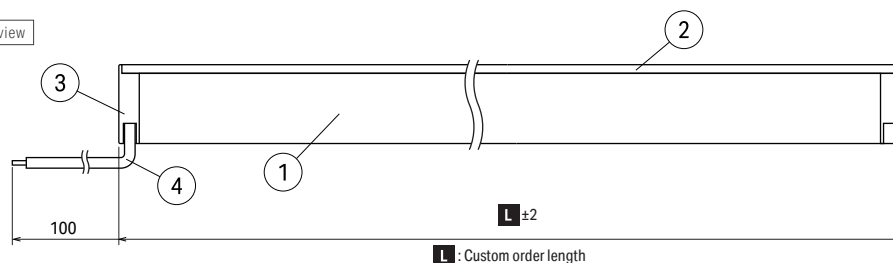

Installation dimensions (Side view)




A) Mounting clip N



B) Magnet set H


Accessories


Mounting clip N for RIMiT hs
(LRMHS-PT-N) 5pcs/1bag

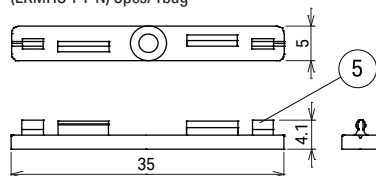

Recommended: Flat head screw M2.3

Magnet set H
(MG-H) 5pcs/1bag



	Part Name	Material	Note	Drawing
1	Body	Aluminum	Alumite treatment, White painting	
2	Cover	Polycarbonate	Diffuser	
3	Side cover	ABS	White	
4	Lead wire		UL1007 AWG26 Black:+ White:-	
5	Mounting clip N for RIMiT hs	Polycarbonate	Clear	
6	Magnet set H	Neogium, Stainless steel	Silver	
7				
8				
9				
10				

Specifications	Light Source Color	Delivered CCT	Model Number
Input voltage: DC24V	Natural White N	4600K Ra 92	158 lm LRMHS-T*S-N-DF-I-4
Wattage: 4.5W/m	White W	3700K Ra 91	139 lm LRMHS-T*S-W-DF-I-4
Max. length per circuit: 3.5m	Warm white WW	3300K Ra 93	144 lm LRMHS-T*S-WW-DF-I-4
Weight: 65g (@L1008)	Warm white L30	2900K Ra 92	136 lm LRMHS-T*S-L30-DF-I-4
Environment: Indoor (No Condensation)	Warm white L27	2600K Ra 92	125 lm LRMHS-T*S-L27-DF-I-4
Accessories: Mounting clip N for RIMiT hs	Warm white L24	2400K Ra 91	110 lm LRMHS-T*S-L24-DF-I-4
Magnet set H			

Job / Project Name

Area / Location / Circuit No.

Product Code

Qty.

Length (mm)

Luci Pte. Ltd.

Singapore World HQ

Tel: +65-6291-2410

http://www.luci.co.jp

Hong Kong Marketing Office

Tel: +852-2219-8462

E-mail: info@luci.co.jp

Korea Office

Tel: +82-2-508-2541

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Shanghai China mainland Regional HQ

Tel: +86-21-5238-9115

RIMiT series

Luci RIMiT hs


Luci RIMiT hs (Both ends lead wire, Connector)




Luci Pte. Ltd.

2025.02.03


front view



side view

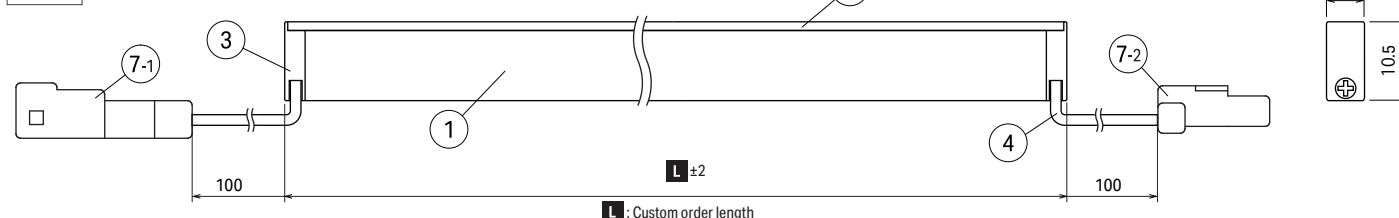

Installation dimensions (Side view)

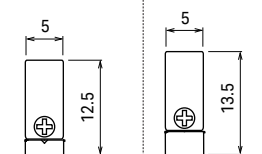


A) Mounting clip N

B) Magnet set H



Connector



Accessories

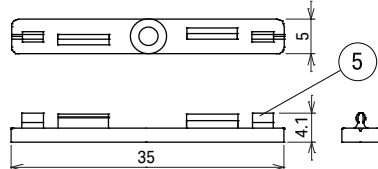Mounting clip N for RIMiT hs
(LRMHS-PT-N) 5pcs/1bag

Recommended: Flat head screw M2.3

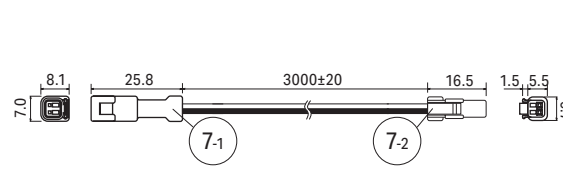Magnet set H
(MG-H) 5pcs/1bagPower supply cable 3M with TR connector
(CAD-3000-MEFE-O)

Part Name	Material	Note	Drawing
1 Body	Aluminum	Alumite treatment, White painting	
2 Cover	Polycarbonate	Diffuser	
3 Side cover	ABS	White	
4 Lead wire		UL1007 AWG26 Black:+ White:-	
5 Mounting clip N for RIMiT hs	Polycarbonate	Clear	
6 Magnet set H	Neogium, Stainless steel	Silver	
7 Connector	Nylon	8-1:SLR-02VF(JST) White, 8-2:SLP-02V(JST) White	
8			
9			
10			

Specifications	Light Source Color		Delivered CCT			Model Number
Input voltage: DC24V	Natural White	N	4600K	Ra 92	158 lm	LRMHS-T*W-N-DF-I-4(C)
Wattage: 4.5W/m	White	W	3700K	Ra 91	139 lm	LRMHS-T*W-W-DF-I-4(C)
Max. length per circuit: 3.5m	Warm white	WW	3300K	Ra 93	144 lm	LRMHS-T*W-WW-DF-I-4(C)
Weight: 65g @L1008)	Warm white	L30	2900K	Ra 92	136 lm	LRMHS-T*W-L30-DF-I-4(C)
Environment: Indoor (No Condensation)	Warm white	L27	2600K	Ra 92	125 lm	LRMHS-T*W-L27-DF-I-4(C)
Accessories: Mounting clip N for RIMiThs	Warm white	L24	2400K	Ra 91	110 lm	LRMHS-T*W-L24-DF-I-4(C)
Magnet set H						

Job / Project Name

Area / Location / Circuit No.

Product Code

Qty.

Length (mm)

Luci Pte. Ltd.

Singapore World HQ

Tel: +65-6291-2410

<http://www.luci.co.jp>

Hong Kong Marketing Office

Tel: +852-2219-8462

E-mail: info@luci.co.jp

Korea Office

Tel: +82-2-508-2541

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Shanghai China mainland Regional HQ

Tel: +86-21-5238-9115

RIMiT series

Luci RIMiT hs

Luci RIMiT hs (One end lead wire, Connector)




Luci Pte. Ltd.

2025.02.03

front view




side view

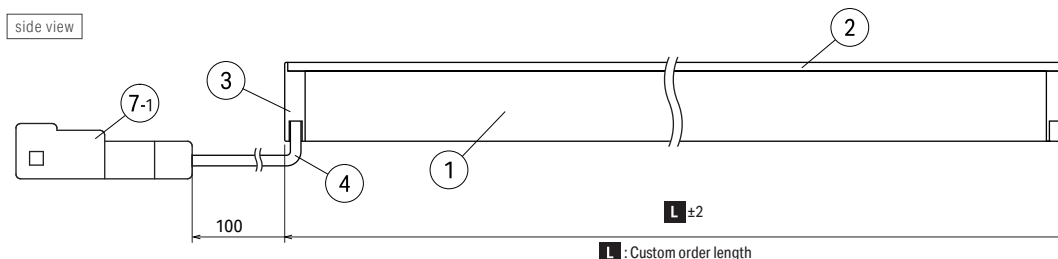


L : Custom order length


side view



Installation dimensions (Side view)



A) Mounting clip N




B) Magnet set H



Connector



Accessories

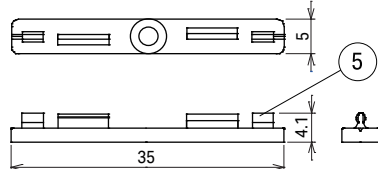Mounting clip N for RIMiT hs
(LRMHS-PT-N) 5pcs/1bag

Recommended: Flat head screw M2.3

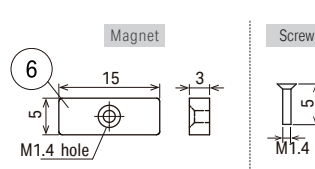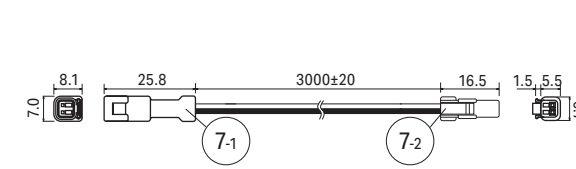Magnet set H
(MG-H) 5pcs/1bagPower supply cable 3M with TR connector
(CAD-3000-MEFE-O)

	Part Name	Material	Note	Drawing
1	Body	Aluminum	Alumite treatment, White painting	
2	Cover	Polycarbonate	Diffuser	
3	Side cover	ABS	White	
4	Lead wire		UL1007 AWG26 Black:+ White:-	
5	Mounting clip N for RIMiT hs	Polycarbonate	Clear	
6	Magnet set H	Neogium, Stainless steel	Silver	
7	Connector	Nylon	8-1:SLR-02VF(JST) White, 8-2:SLP-02V(JST) White	
8				
9				
10				

Specifications	Light Source Color	Delivered CCT	Model Number
Input voltage: DC24V	Natural White N	4600K Ra 92	158 lm LRMHS-T*S-N-DF-I-4(C)
Wattage: 4.5W/m	White W	3700K Ra 91	139 lm LRMHS-T*S-W-DF-I-4(C)
Max. length per circuit: 3.5m	Warm white WW	3300K Ra 93	144 lm LRMHS-T*S-WW-DF-I-4(C)
Weight: 65g (@L1008)	Warm white L30	2900K Ra 92	136 lm LRMHS-T*S-L30-DF-I-4(C)
Environment: Indoor (No Condensation)	Warm white L27	2600K Ra 92	125 lm LRMHS-T*S-L27-DF-I-4(C)
Accessories: Mounting clip N for RIMiT hs	Warm white L24	2400K Ra 91	110 lm LRMHS-T*S-L24-DF-I-4(C)
Magnet set H			

Job / Project Name

Area / Location / Circuit No.

Product Code

Qty.

Length (mm)

Luci Pte. Ltd.
Singapore World HQ
Tel: +65-6291-2410

<http://www.luci.co.jp>
Hong Kong Marketing Office
Tel: +852-2219-8462

E-mail: info@luci.co.jp
Korea Office
Tel: +82-2-508-2541

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115

Luci RIMiThs _ Custom order length

Length	Model No.	Fitting length (mm)	Wattage (W)	Mounting Clip
0033	LRMHS-T0033*-*-DF-I-4	32.2	0.1	1 pcs Recommended pitch 60 to 230mm
0058	LRMHS-T0058*-*-DF-I-4	57.2	0.2	
0083	LRMHS-T0083*-*-DF-I-4	82.2	0.3	
0108	LRMHS-T0108*-*-DF-I-4	107.2	0.5	
0133	LRMHS-T0133*-*-DF-I-4	132.2	0.6	
0158	LRMHS-T0158*-*-DF-I-4	157.2	0.7	
0183	LRMHS-T0183*-*-DF-I-4	182.2	0.8	
0208	LRMHS-T0208*-*-DF-I-4	207.2	0.9	
0233	LRMHS-T0233*-*-DF-I-4	232.2	1.0	
0258	LRMHS-T0258*-*-DF-I-4	257.2	1.1	3 pcs Recommended pitch 140 to 370mm
0283	LRMHS-T0283*-*-DF-I-4	282.2	1.2	
0308	LRMHS-T0308*-*-DF-I-4	307.2	1.4	
0333	LRMHS-T0333*-*-DF-I-4	332.2	1.5	
0358	LRMHS-T0358*-*-DF-I-4	357.2	1.6	
0383	LRMHS-T0383*-*-DF-I-4	382.2	1.7	
0408	LRMHS-T0408*-*-DF-I-4	407.2	1.8	
0433	LRMHS-T0433*-*-DF-I-4	432.2	1.9	
0458	LRMHS-T0458*-*-DF-I-4	457.2	2.0	
0483	LRMHS-T0483*-*-DF-I-4	482.2	2.1	
0508	LRMHS-T0508*-*-DF-I-4	507.2	2.3	
0533	LRMHS-T0533*-*-DF-I-4	532.2	2.4	
0558	LRMHS-T0558*-*-DF-I-4	557.2	2.5	
0583	LRMHS-T0583*-*-DF-I-4	582.2	2.6	
0608	LRMHS-T0608*-*-DF-I-4	607.2	2.7	
0633	LRMHS-T0633*-*-DF-I-4	632.2	2.8	
0658	LRMHS-T0658*-*-DF-I-4	657.2	2.9	
0683	LRMHS-T0683*-*-DF-I-4	682.2	3.1	
0708	LRMHS-T0708*-*-DF-I-4	707.2	3.2	4 pcs Recommended pitch 250 to 400mm
0733	LRMHS-T0733*-*-DF-I-4	732.2	3.3	
0758	LRMHS-T0758*-*-DF-I-4	757.2	3.4	
0783	LRMHS-T0783*-*-DF-I-4	782.2	3.5	
0808	LRMHS-T0808*-*-DF-I-4	807.2	3.6	
0833	LRMHS-T0833*-*-DF-I-4	832.2	3.7	
0858	LRMHS-T0858*-*-DF-I-4	857.2	3.8	
0883	LRMHS-T0883*-*-DF-I-4	882.2	4.0	
0908	LRMHS-T0908*-*-DF-I-4	907.2	4.1	
0933	LRMHS-T0933*-*-DF-I-4	932.2	4.2	
0958	LRMHS-T0958*-*-DF-I-4	957.2	4.3	
0983	LRMHS-T0983*-*-DF-I-4	982.2	4.4	
1008	LRMHS-T1008*-*-DF-I-4	1007.2	4.5	
1033	LRMHS-T1033*-*-DF-I-4	1032.2	4.6	
1058	LRMHS-T1058*-*-DF-I-4	1057.2	4.7	
1083	LRMHS-T1083*-*-DF-I-4	1082.2	4.9	
1108	LRMHS-T1108*-*-DF-I-4	1107.2	5.0	
1133	LRMHS-T1133*-*-DF-I-4	1132.2	5.1	5 pcs Recommended pitch 315 to 375mm
1158	LRMHS-T1158*-*-DF-I-4	1157.2	5.2	
1183	LRMHS-T1183*-*-DF-I-4	1182.2	5.3	
1208	LRMHS-T1208*-*-DF-I-4	1207.2	5.4	
1233	LRMHS-T1233*-*-DF-I-4	1232.2	5.5	
1258	LRMHS-T1258*-*-DF-I-4	1257.2	5.7	
1283	LRMHS-T1283*-*-DF-I-4	1282.2	5.8	
1308	LRMHS-T1308*-*-DF-I-4	1307.2	5.9	
1333	LRMHS-T1333*-*-DF-I-4	1332.2	6.0	
1358	LRMHS-T1358*-*-DF-I-4	1357.2	6.1	
1383	LRMHS-T1383*-*-DF-I-4	1382.2	6.2	
1408	LRMHS-T1408*-*-DF-I-4	1407.2	6.3	
1433	LRMHS-T1433*-*-DF-I-4	1432.2	6.4	
1458	LRMHS-T1458*-*-DF-I-4	1457.2	6.6	
1483	LRMHS-T1483*-*-DF-I-4	1482.2	6.7	
1508	LRMHS-T1508*-*-DF-I-4	1507.2	6.8	

Accessories

LRMHS-PT-N	Mounting clip N for RIMiThs 5pcs/1bag
MG-H	Magnet set H 5pcs/1bag