


LRMKK-T

Color management
MacAdam 3 step  1 years warranty

- Compact 7.4 mm square cross-sectional size
- Custom lengths available in every 25mm increment, up to 1508mm
- Selectable between both and one side cable feed, open end or connector

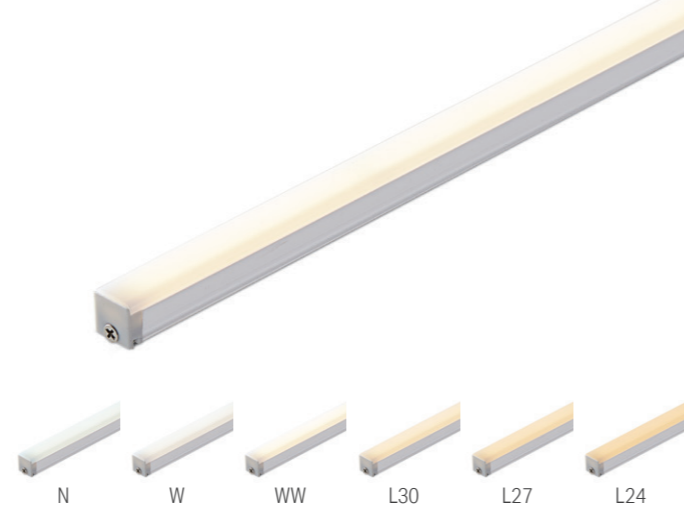

Model No. (Open end)

LRMKK-T - - DF - I - 6


Model No. (Connector)

LRMKK-T - - DF - I - 6 (C)

Product Name - Length / Lead wire - Light source color - Cover Type - Wattage Connector

LRMKK - Refer to Custom order length - W: Both ends S: One end - N: Natural white W: White WW: Warm white 3500K L30: Warm white 3000K L27: Warm white 2700K L24: Warm white 2400K - DF: Diffuser - Environment I: Indoor - 6: 6.4W/m (C): Connector

Light Intensity



Specification

Model No.	Open end	LRMKK-T1000 S/W- <input type="text"/> -DF-I-6
	Connector	LRMKK-T1000 S/W- <input type="text"/> -DF-I-6 (C)
Power consumption		6.4 W/m
Fitting length(L)		33 to 1508mm (Refer to Custom order length)
Weight		76g / 1008 mm
Luminaire efficacy(2700K)		52.5 lm/W

Light source color	Delivered CCT	○ = Device inventory
N 5000K Ra 94	4600K	○ 394 lm
W 4000K Ra 92	3700K	○ 380 lm
WW 3500K Ra 94	3300K	○ 351 lm
L30 3000K Ra 92	2900K	○ 341 lm
L27 2700K Ra 92	2600K	○ 334 lm
L24 2400K Ra 91	2400K	○ 306 lm

The optical data provided on the each product pages are for reference only; the data values are not guaranteed. Please use as reference materials for your planning.

General Specification

Input voltage	DC24V
Environment	Indoor (no condensation)
Max. length Per circuit	3.5m
Material (body)	Polycarbonate, Aluminum
Attachments	-
Accessories	1 Mounting clip for RIMiT kk 2 Lift Parts for RIMiT 3 Magnet set A 4 Cable 5M TR Connector 5 Magnetic tape 6 double-sided tape
Certification	CE
Dimmable	Yes (0-10V/1-10V, DMX, DALI, PWM)
Power Supplies	Required

Max. connectable length per power supply

Length of LED fixture (70% loading factor) *: split into multiple circuits	Power supply
6.4 W/m	
~5.4 m*	50W power supply
~10.9 m*	100W power supply
~16.4 m*	150W power supply

External dimension


Luci RIMiT kk Indoor / W Both ends lead wire, Open end

LRMKK-T W - - DF - I - 6



Luci RIMiT kk Indoor / W Both ends lead wire, (C) Connector

LRMKK-T W - - DF - I - 6 (C)

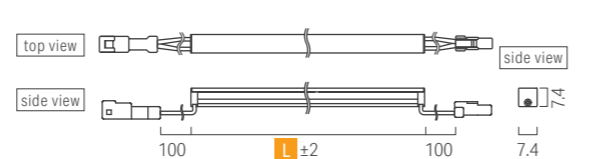


Custom order products size

Length	Fitting length	Power consumption	Mounting Clip
0033	32.2	0.2	1 pcs
0058	57.2	0.3	
0083	82.2	0.5	
0108	107.2	0.6	2 pcs Recommended pitch 60 to 230mm
0133	132.2	0.8	
0158	157.2	1.0	
0183	182.2	1.1	
0208	207.2	1.3	
0233	232.2	1.4	
0258	257.2	1.6	3 pcs Recommended pitch 140 to 370mm
0283	282.2	1.8	
0308	307.2	1.9	
0333	332.2	2.1	
0358	357.2	2.2	
0383	382.2	2.4	
0408	407.2	2.6	
0433	432.2	2.7	
0458	457.2	2.9	
0483	482.2	3.0	
0508	507.2	3.2	
0533	532.2	3.4	
0558	557.2	3.5	
0583	582.2	3.7	
0608	607.2	3.8	
0633	632.2	4.0	
0658	657.2	4.2	
0683	682.2	4.3	
0708	707.2	4.5	
0733	732.2	4.6	
0758	757.2	4.8	



Length	Fitting length	Power consumption	Mounting Clip
0783	782.2	5.0	4 pcs Recommended pitch 250 to 400mm
0808	807.2	5.1	
0833	832.2	5.3	
0858	857.2	5.4	
0883	882.2	5.6	
0908	907.2	5.8	
0933	932.2	5.9	
0958	957.2	6.1	
0983	982.2	6.2	
1008	1007.2	6.4	
1033	1032.2	6.6	
1058	1057.2	6.7	
1083	1082.2	6.9	
1108	1107.2	7.0	
1133	1132.2	7.2	
1158	1157.2	7.4	
1183	1182.2	7.5	
1208	1207.2	7.7	
1233	1232.2	7.8	
1258	1257.2	8.0	
1283	1282.2	8.2	
1308	1307.2	8.3	
1333	1332.2	8.5	
1358	1357.2	8.6	
1383	1382.2	8.8	
1408	1407.2	9.0	
1433	1432.2	9.1	
1458	1457.2	9.3	
1483	1482.2	9.4	
1508	1507.2	9.6	

Cross sectional view when installing accesories

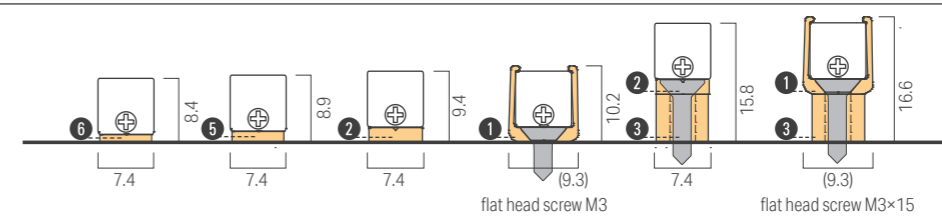
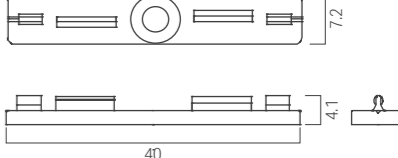


Accessories

1 Mounting clip for RIMiT kk
Model No.: LRMKK-PT-C
5 pcs/1 bag



2 Mounting clip D for RIMiT
Model No.: LRM-PT-D
5 pcs/1 bag

3 Lift Parts for RIMiT
Model No.: LRM-PT-B
2 pcs/1 bag



Lift parts must be used with 1 mounting clip

For magnet installation, please refer the required number of clip to the table on P.8





4 Power supply cable 5M
Model No.: CAD-5000-MEFE-O

1 pcs per circuit for connecting the LED fixture to power supply or dimmer driver.

5 Magnetic tape for RIMiT 5m
Model No.: LRM-MT5



6 Double sided tape 15m
Model No.: LFP-AT15

Width: 10mm

