

RIMiT series

Luci RIMiT zen


Luci RIMiT zen (One end lead wire, Open end)




Luci Pte., Ltd.

2024.09.12


front view




side view

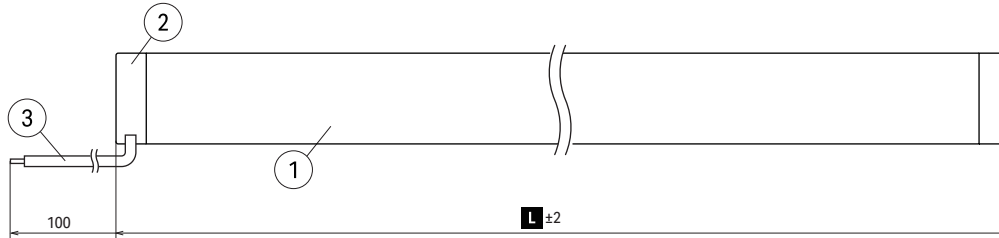



side view

**L** : Custom order length (109 - 1009 mm)




Installation dimensions (Side view)



A) Mounting clip

B) Mounting clip
+ MagnetC) Mounting clip
+ Lift parts

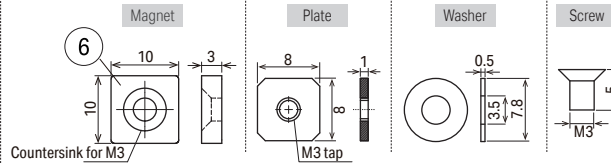Accessories

Mounting clip for RIMiT zen
(LRMZE-PT-L) 5pcs/1bagLift parts for RIMiT
(LRM-PT-B) 5pcs/1bagMagnet set A
(MG-A) 5pcs/1bag

	Part Name	Material	Note	Drawing
1	Body	Aluminum	Diffuser	
2	Side cover	ABS	White	
3	Lead wire		UL1007 AWG26 Black:+ White:-	
4	Mounting clip for RIMiT zen	Polycarbonate	Clear	
5	Lift parts	Polycarbonate	Clear	
6	Magnet set	Neogium, Stainless steel, Steel	Magnet, Washer, Plate, Screw	
7				
8				
9				
10				

Specifications	Light Source Color	Delivered CCT	Model Number
Input voltage : DC24V	Natural White N	4200K Ra 91 479 lm	LRMZE-T*SS-N-DF-I-8
Wattage: 8.9W/m	White W	3500K Ra 96 571 lm	LRMZE-T*SS-W-DF-I-8
Max. length per circuit: 1m	Warm white WW	3100K Ra 94 578 lm	LRMZE-T*SS-WW-DF-I-8
Weight : 70g (@L1009)	Warm white L30	2700K Ra 94 510 lm	LRMZE-T*SS-L30-DF-I-8
Environment : Indoor (No Condensation)	Warm white L27	2400K Ra 95 501 lm	LRMZE-T*SS-L27-DF-I-8
Accessories : Mounting clip for RIMiT zen	Warm white L24	2200K Ra 92 466 lm	LRMZE-T*SS-L24-DF-I-8
Lift parts			
Magnet set			

Job / Project Name

Area / Location / Circuit No.

Product Code

Qty.

Length (mm)

Luci Pte. Ltd.
Singapore World HQ
Tel: +65-6291-2410

<http://www.luci.co.jp>
Hong Kong Marketing Office
Tel: +852-2219-8462

E-mail: info@luci.co.jp
Korea Office
Tel: +82-2-508-2541

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115

RIMiT series

Luci RIMiT zen


Luci RIMiT zen (Midpoint lead wire)




Luci Pte., Ltd.

2024.09.12


front view




side view

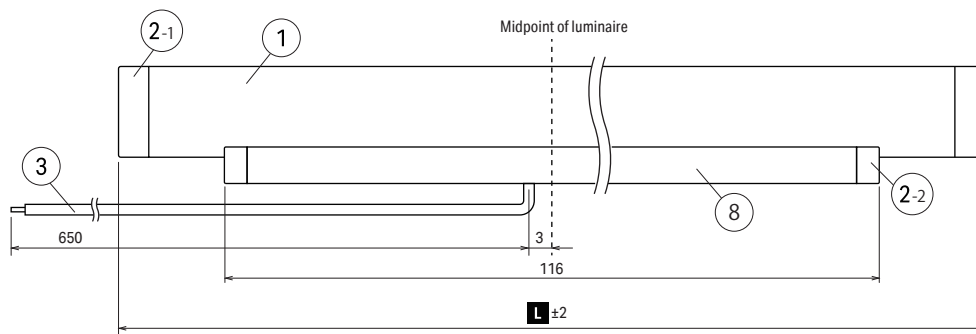




side view




Installation dimensions (Side view)




A) Mounting clip

B) Mounting clip
+ MagnetC) Mounting clip
+ Lift parts


D) Mounting clip D

E) Mounting clip D
+ Lift parts


Accessories

Mounting clip for RIMiT zen
(LRMZE-PT-L) 5pcs/1bag

4


Lift parts for RIMiT
(LRM-PT-B) 5pcs/1bag

5


Magnet set A
(MG-A) 5pcs/1bag

6


Countersink for M3




Plate



Washer



Screw

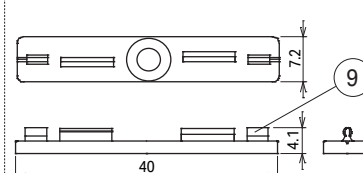Mounting clip D
(LRM-PT-D) 5pcs/1bag

9

Part Name	Material	Note	Drawing
1 Body	Aluminum	Diffuser	
2 Side cover	ABS	White	
3 Lead wire		UL1007 AWG26 Black;+ White:-	
4 Mounting clip for RIMiT zen	Polycarbonate	Clear	
5 Lift parts	Polycarbonate	Clear	
6 Magnet set	Neogium, Stainless steel, Steel	Magnet, Washer, Plate, Screw	
7 -	-	-	
8 Heat sink	Aluminum		
9 Mounting clip D	Polycarbonate	Clear	
10			

Specifications	Light Source Color	Deliverd CCT	Model Number
Input voltage: DC24V	Natural White N	4200K Ra 91	LRMZE-T*SC-N-DF-I-8
Wattage: 4.5W/509m	White W	3500K Ra 96	LRMZE-T*SC-W-DF-I-8
Max. length per curcuit: 0.5m	Warm white WW	3100K Ra 94	LRMZE-T*SC-WW-DF-I-8
Weight: 38g (@L509)	Warm white L30	2700K Ra 94	LRMZE-T*SC-L30-DF-I-8
Environment: Indoor (No Condensation)	Warm white L27	2400K Ra 95	LRMZE-T*SC-L27-DF-I-8
Accessories: Mounting clip for RIMiT zen	Warm white L24	2200K Ra 92	LRMZE-T*SC-L24-DF-I-8
Lift parts			
Mounting clip D			
Magnet set			

Job / Project Name			Area / Location / Circuit No.
Product Code	Qty.	Length (mm)	
Luci Pte. Ltd.	http://www.luci.co.jp	E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ	Hong Kong Marketing Office	Korea Office	Shanghai China mainland Regional HQ
Tel: +65-6291-2410	Tel: +852-2219-8462	Tel: +82-2-508-2541	Tel: +86-21-5238-9115

RIMiT series

Luci RIMiT zen


Luci RIMiT sk (One end lead wire, Connector)




Luci Pte., Ltd.

2024.09.12


front view




side view

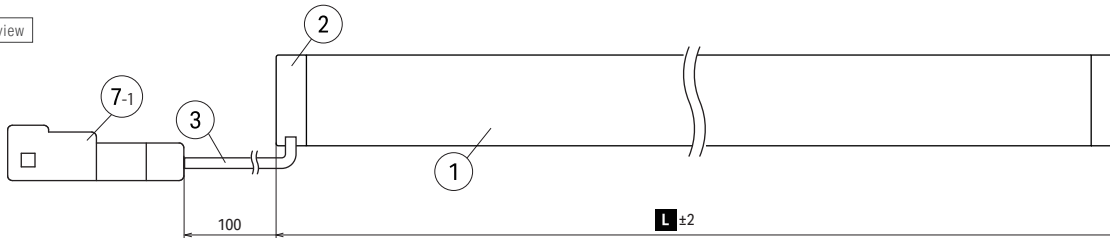



side view

**L** : Custom order length (109 - 1009 mm)


Installation dimensions (Side view)







A) Mounting clip

B) Mounting clip
+ MagnetC) Mounting clip
+ Lift parts

Connector



Accessories

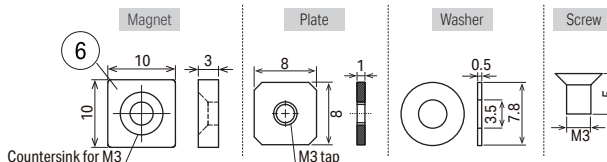Cable 5M TR Connector
(CAD-5000-MEFE-0)Mounting clip for RIMiT zen
(LRMZE-PT-L) 5pcs/1bagLift parts for RIMiT
(LRM-PT-B) 5pcs/1bagMagnet set A
(MG-A) 5pcs/1bag

	Part Name	Material	Note	Drawing
1	Body	Aluminum	Diffuser	
2	Side cover	ABS	White	
3	Lead wire		UL1007 AWG26 Black:+ White:-	
4	Mounting clip for RIMiT zen	Polycarbonate	Clear	
5	Lift parts	Polycarbonate	Clear	
6	Magnet set	Neogium, Stainless steel, Steel	Magnet, Washer, Plate, Screw	
7	Connector	Nylon	UL94V-0, White	
8				
9				
10				

Specifications	Light Source Color	Deliverd CCT	Model Number
Input voltage: DC24V	Natural White N	4200K Ra 91 479 lm	LRMZE-T*SS-N-DF-I-8(C) LRMZE-T*SS-W-DF-I-8(C) LRMZE-T*SS-WW-DF-I-8(C) LRMZE-T*SS-L30-DF-I-8(C) LRMZE-T*SS-L27-DF-I-8(C) LRMZE-T*SS-L24-DF-I-8(C)
Wattage: 8.9W/m	White W	3500K Ra 96 571 lm	
Max. length per curcuit: 1m	Warm white WW	3100K Ra 94 578 lm	
Weight: 70g (@L1009)	Warm white L30	2700K Ra 94 510 lm	
Environment: Indoor (No Condensation)	Warm white L27	2400K Ra 95 501 lm	
Accessories: Mounting clip for RIMiT zen	Warm white L24	2200K Ra 92 466 lm	
Lift parts			
Magnet set			

Job / Project Name

Area / Location / Circuit No.

Product Code

Qty.

Length (mm)

Luci Pte. Ltd.
Singapore World HQ
Tel: +65-6291-2410

<http://www.luci.co.jp>
Hong Kong Marketing Office
Tel: +852-2219-8462

E-mail: info@luci.co.jp
Korea Office
Tel: +82-2-508-2541


LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115

Luci RIMiT zen _ Custom order length


One end lead wire

Length	Model No.		Fitting length (mm)	Wattage (W)	Mounting Clip
	Open end	Connector	L		
0034	LRMZE-T0034SS*-DF-I-8	LRMZE-T0034SS*-DF-I-8(C)	34	0.2	1 pcs
0059	LRMZE-T0059SS*-DF-I-8	LRMZE-T0059SS*-DF-I-8(C)	59	0.4	
0084	LRMZE-T0084SS*-DF-I-8	LRMZE-T0084SS*-DF-I-8(C)	84	0.7	
0109	LRMZE-T0109SS*-DF-I-8	LRMZE-T0109SS*-DF-I-8(C)	109	0.9	
0134	LRMZE-T0134SS*-DF-I-8	LRMZE-T0134SS*-DF-I-8(C)	134	1.1	
0159	LRMZE-T0159SS*-DF-I-8	LRMZE-T0159SS*-DF-I-8(C)	159	1.3	
0184	LRMZE-T0184SS*-DF-I-8	LRMZE-T0184SS*-DF-I-8(C)	184	1.6	
0209	LRMZE-T0209SS*-DF-I-8	LRMZE-T0209SS*-DF-I-8(C)	209	1.8	
0234	LRMZE-T0234SS*-DF-I-8	LRMZE-T0234SS*-DF-I-8(C)	234	2.0	
0259	LRMZE-T0259SS*-DF-I-8	LRMZE-T0259SS*-DF-I-8(C)	259	2.2	2 pcs Recommended pitch 60 to 230mm
0284	LRMZE-T0284SS*-DF-I-8	LRMZE-T0284SS*-DF-I-8(C)	284	2.5	
0309	LRMZE-T0309SS*-DF-I-8	LRMZE-T0309SS*-DF-I-8(C)	309	2.7	
0334	LRMZE-T0334SS*-DF-I-8	LRMZE-T0334SS*-DF-I-8(C)	334	2.9	
0359	LRMZE-T0359SS*-DF-I-8	LRMZE-T0359SS*-DF-I-8(C)	359	3.1	
0384	LRMZE-T0384SS*-DF-I-8	LRMZE-T0384SS*-DF-I-8(C)	384	3.3	
0409	LRMZE-T0409SS*-DF-I-8	LRMZE-T0409SS*-DF-I-8(C)	409	3.6	
0434	LRMZE-T0434SS*-DF-I-8	LRMZE-T0434SS*-DF-I-8(C)	434	3.8	
0459	LRMZE-T0459SS*-DF-I-8	LRMZE-T0459SS*-DF-I-8(C)	459	4.0	3 pcs Recommended pitch 140 to 370mm
0484	LRMZE-T0484SS*-DF-I-8	LRMZE-T0484SS*-DF-I-8(C)	484	4.2	
0509	LRMZE-T0509SS*-DF-I-8	LRMZE-T0509SS*-DF-I-8(C)	509	4.5	
0534	LRMZE-T0534SS*-DF-I-8	LRMZE-T0534SS*-DF-I-8(C)	534	4.7	
0559	LRMZE-T0559SS*-DF-I-8	LRMZE-T0559SS*-DF-I-8(C)	559	4.9	
0584	LRMZE-T0584SS*-DF-I-8	LRMZE-T0584SS*-DF-I-8(C)	584	5.1	
0609	LRMZE-T0609SS*-DF-I-8	LRMZE-T0609SS*-DF-I-8(C)	609	5.4	
0634	LRMZE-T0634SS*-DF-I-8	LRMZE-T0634SS*-DF-I-8(C)	634	5.6	
0659	LRMZE-T0659SS*-DF-I-8	LRMZE-T0659SS*-DF-I-8(C)	659	5.8	4 pcs Recommended pitch 250 to 400mm
0684	LRMZE-T0684SS*-DF-I-8	LRMZE-T0684SS*-DF-I-8(C)	684	6.0	
0709	LRMZE-T0709SS*-DF-I-8	LRMZE-T0709SS*-DF-I-8(C)	709	6.2	
0734	LRMZE-T0734SS*-DF-I-8	LRMZE-T0734SS*-DF-I-8(C)	734	6.5	
0759	LRMZE-T0759SS*-DF-I-8	LRMZE-T0759SS*-DF-I-8(C)	759	6.7	
0784	LRMZE-T0784SS*-DF-I-8	LRMZE-T0784SS*-DF-I-8(C)	784	6.9	
0809	LRMZE-T0809SS*-DF-I-8	LRMZE-T0809SS*-DF-I-8(C)	809	7.1	
0834	LRMZE-T0834SS*-DF-I-8	LRMZE-T0834SS*-DF-I-8(C)	834	7.4	
0859	LRMZE-T0859SS*-DF-I-8	LRMZE-T0859SS*-DF-I-8(C)	859	7.6	
0884	LRMZE-T0884SS*-DF-I-8	LRMZE-T0884SS*-DF-I-8(C)	884	7.8	4 pcs Recommended pitch 250 to 400mm
0909	LRMZE-T0909SS*-DF-I-8	LRMZE-T0909SS*-DF-I-8(C)	909	8.0	
0934	LRMZE-T0934SS*-DF-I-8	LRMZE-T0934SS*-DF-I-8(C)	934	8.3	
0959	LRMZE-T0959SS*-DF-I-8	LRMZE-T0959SS*-DF-I-8(C)	959	8.5	
0984	LRMZE-T0984SS*-DF-I-8	LRMZE-T0984SS*-DF-I-8(C)	984	8.7	
1009	LRMZE-T1009SS*-DF-I-8	LRMZE-T1009SS*-DF-I-8(C)	1009	8.9	

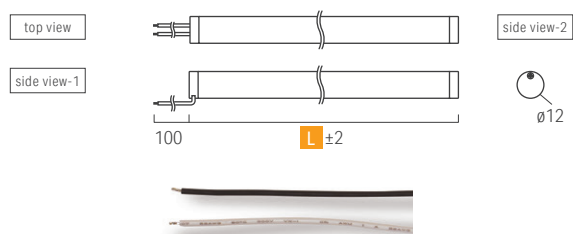Open end lead wire



Connector

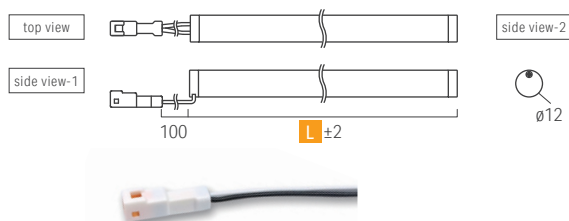

Note for RIMiT zen special order lengths

In sizes 0534-1009mm, please note that a thin dark spot will appear in the center as part of the product's design. We recommend placing your order with this consideration in mind.


Accessories	LRMZE-PT-L	Mounting clip for zen 5pcs/1bag
	LRM-PT-D	Mounting clip D 5pcs/1bag
	MG-A	Magnet set A 5pcs/1bag
	LRM-PT-B	Lift parts 5pcs/1bag

Luci RIMiT zen _ Custom order length

Midpoint lead wire

Length	Model No.	Fitting length (mm) L	Wattage (W)	Mounting Clip
0159	LRMZE-T0159SC-*-DF-I-8	159	1.3	2 pcs
0209	LRMZE-T0209SC-*-DF-I-8	209	1.8	
0259	LRMZE-T0259SC-*-DF-I-8	259	2.2	
0309	LRMZE-T0309SC-*-DF-I-8	309	2.7	
0359	LRMZE-T0359SC-*-DF-I-8	359	3.1	
0409	LRMZE-T0409SC-*-DF-I-8	409	3.6	
0459	LRMZE-T0459SC-*-DF-I-8	459	4.0	
0509	LRMZE-T0509SC-*-DF-I-8	509	4.5	

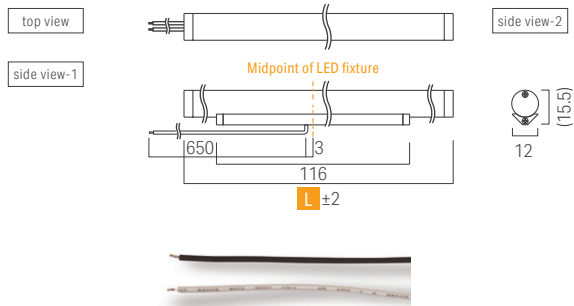Midpoint lead wire



For the midpoint lead wire type, a white heatsink is mounted at the center of the lighting fixture.

Accessories	LRM-PT-D	Mounting clip D 5pcs/1bag
	LRM-PT-B	Lift parts 5pcs/1bag