

silux series


Luci silux K(4.3W/m)

Luci silux K(4.3W/m) 74



Luci

Luci Pte. Ltd.







2022.07.12

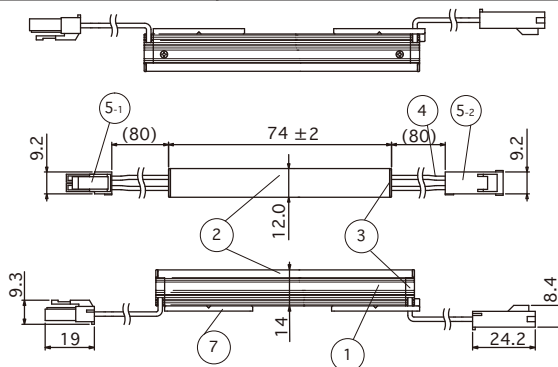

Side View


-Multiclip K Mounted
(Upward lighting)

Installation Dimensions (Side View)

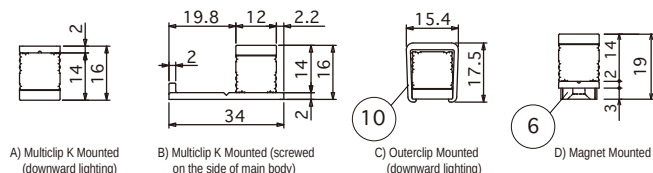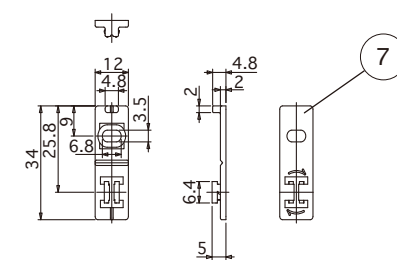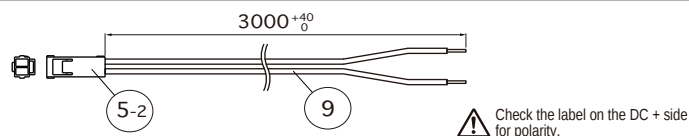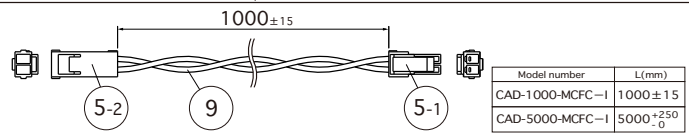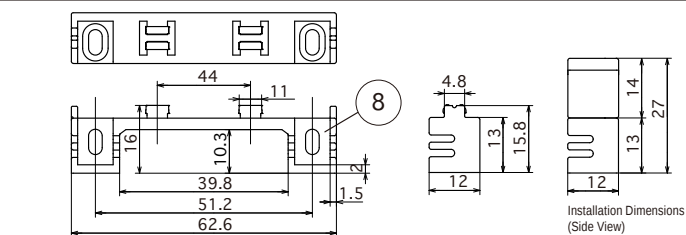Accessories • Option parts :
Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)Option parts : Outerclip for silux
(LSX-PT-A) (5pcs / 1bag)Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)Option parts :
Liftclip for silux (LSX-PTL) (2pcs / 1bag)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black+, white-	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 15g	Light Source color :	Item Number
Power consumption : 0.3W	Number of LEDs : 14		Natural white : N : 5000K (15 lm* / Ra 93)	LSXK-0074-N-DF-I-4 LSXK-0074-W-DF-I-4 LSXK-0074-WW-DF-I-4 LSXK-0074-L30-DF-I-4 LSXK-0074-L27-DF-I-4 LSXK-0074-L24-DF-I-4 LSXK-0074-L21-DF-I-4
Max. sets connectable : 6m			White : W : 4000K (15 lm* / Ra 94)	
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (14 lm* / Ra 94)	
Operating temperature : 0°C~+35°C (No Condensation)			Warm white 3000K : L30 : 3000K (14 lm* / Ra 93)	
Accessories : Multiclip K (3pcs / 1 bag)			Warm white 2700K : L27 : 2700K (13 lm* / Ra 93)	
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (12 lm* / Ra 94)	
Joint cable 1000mm,			Warm white 2100K : L21 : 2400K (11 lm* / Ra 90)	
Multiclip K (3pcs / 1 bag)				
Liftclip (2pcs / 1 bag)				
Outerclip (5pcs / 1 bag)				
Magnet attachment				

*=Equivalent

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series


Luci silux K(4.3W/m)

Luci silux K(4.3W/m) 259



Luci

Luci Pte. Ltd.

2022.07.12

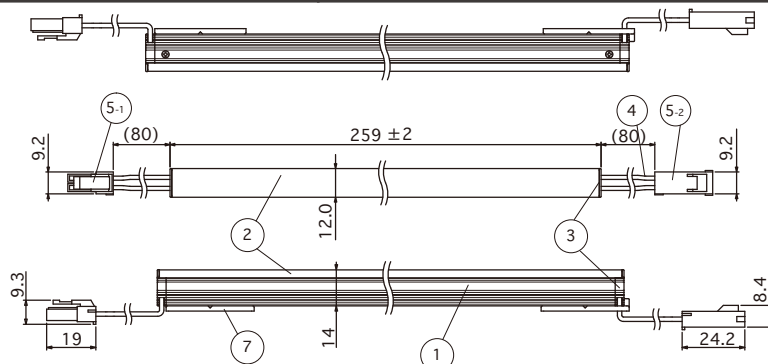


Installation Dimensions (Side View)

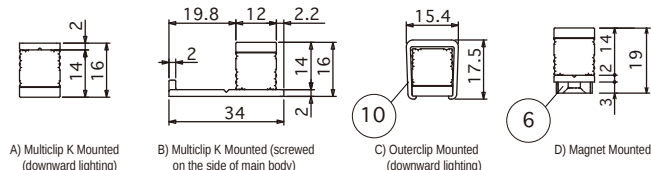


Option parts :

Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)


 Check the label on the DC + side for polarity.

Option parts :


Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Model number	L(mm)
CAD-1000-MCFC-I	1000 ^{±15}
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀

Accessories • Option parts :

Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

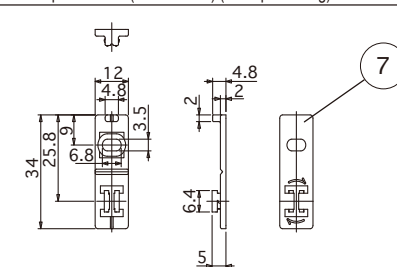


Option parts : Outerclip for silux (LSX-PT-A) (5pcs / 1bag)




Option parts :

Liftclip for silux (LSX-PTL) (2pcs / 1bag)

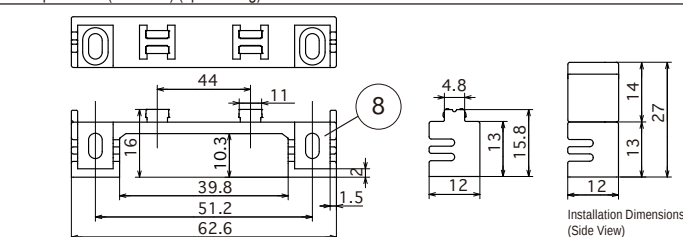

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 40g	Light Source color :	Item Number
Power consumption : 1W	Number of LEDs : 49		Natural white : N : 5000K (53 lm* / Ra 93)	LSXK-0259-N-DF-I-4
Max. sets connectable : 6m			White : W : 4000K (53 lm* / Ra 94)	LSXK-0259-W-DF-I-4
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (51 lm* / Ra 94)	LSXK-0259-WW-DF-I-4
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K : L30 : 3000K (49 lm* / Ra 93)	LSXK-0259-L30-DF-I-4
Accessories : Multiclip K (3pcs / 1 bag)			Warm white 2700K : L27 : 2700K (47 lm* / Ra 93)	LSXK-0259-L27-DF-I-4
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (44 lm* / Ra 94)	LSXK-0259-L24-DF-I-4
Joint cable 1000mm,			Warm white 2100K : L21 : 2100K (41 lm* / Ra 90)	LSXK-0259-L21-DF-I-4
Multiclip K (3pcs / 1 bag)				
Liftclip (2pcs / 1 bag)				
Outerclip (5pcs / 1 bag)				
Magnet attachment				

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series


Luci silux K(4.3W/m)

Luci silux K(4.3W/m) 388



Luci

Luci Pte. Ltd.

2022.07.12

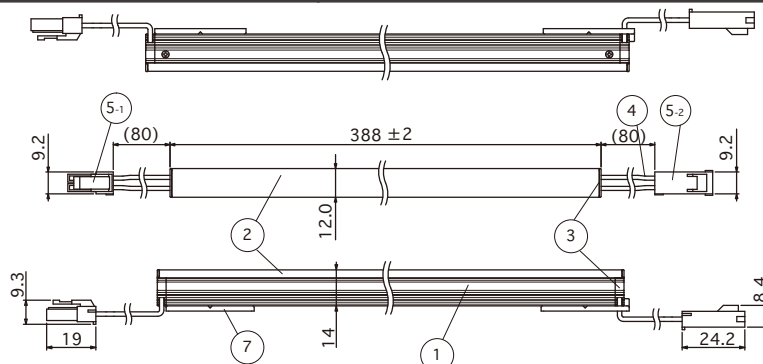


Installation Dimensions (Side View)

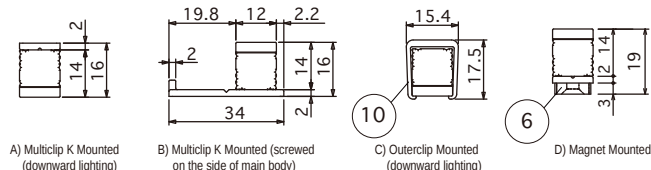


Option parts :

Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)


 Check the label on the DC + side for polarity.

Option parts :


Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Model number	L(mm)
CAD-1000-MCFC-I	1000 ^{±15}
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀

Accessories • Option parts :

Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

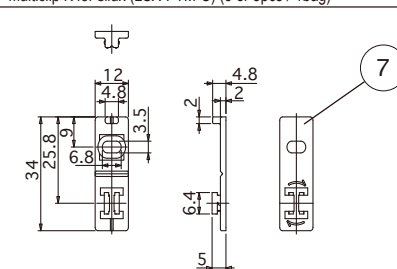


Option parts : Outerclip for silux (LSX-PT-A) (5pcs / 1bag)




Option parts :

Liftclip for silux (LSX-PTL) (2pcs / 1bag)

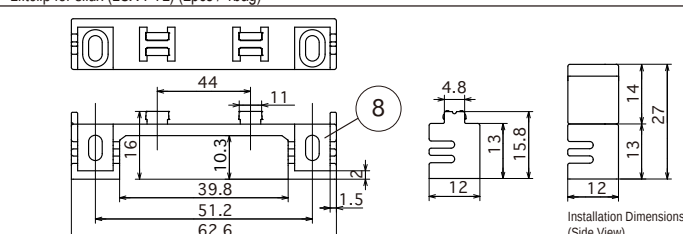

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

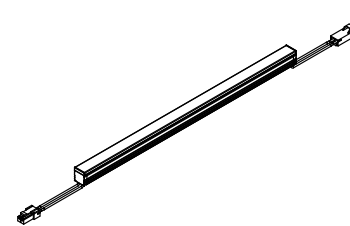	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 59g	Light Source color :	Item Number
Power consumption : 1.6W	Number of LEDs : 77		Natural white : N : 5000K (83 lm* / Ra 93)	LSXK-0388-N-DF-I-4
Max. sets connectable : 6m			White : W : 4000K (83 lm* / Ra 94)	LSXK-0388-W-DF-I-4
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (80 lm* / Ra 94)	LSXK-0388-WW-DF-I-4
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K : L30 : 3000K (78 lm* / Ra 93)	LSXK-0388-L30-DF-I-4
Accessories : Multiclip K (3pcs / 1 bag)			Warm white 2700K : L27 : 2700K (74 lm* / Ra 93)	LSXK-0388-L27-DF-I-4
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (69 lm* / Ra 94)	LSXK-0388-L24-DF-I-4
Joint cable 1000mm,			Warm white 2100K : L21 : 2100K (65 lm* / Ra 90)	LSXK-0388-L21-DF-I-4
Multiclip K (3pcs / 1 bag)				
Liftclip (2pcs / 1 bag)				
Outerclip (5pcs / 1 bag)				
Magnet attachment				

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series


Luci silux K(4.3W/m)

Luci silux K(4.3W/m) 509



Luci

Luci Pte. Ltd.

2022.07.12

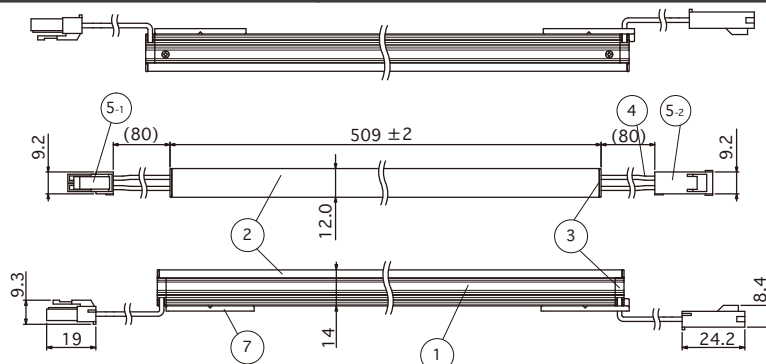



Installation Dimensions (Side View)

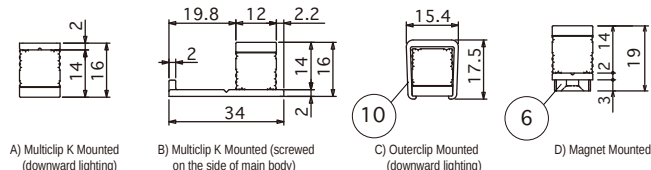


Option parts :

Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)


 Check the label on the DC + side for polarity.

Option parts :


Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Model number	L(mm)
CAD-1000-MCFC-I	1000 ^{±15}
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀

Accessories • Option parts :

Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

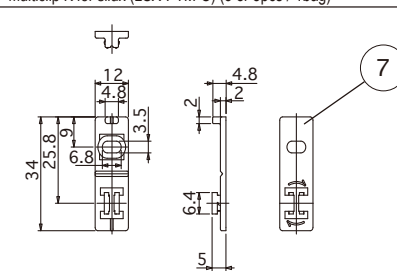


Option parts : Outerclip for silux (LSX-PT-A) (5pcs / 1bag)




Option parts :

Liftclip for silux (LSX-PTL) (2pcs / 1bag)

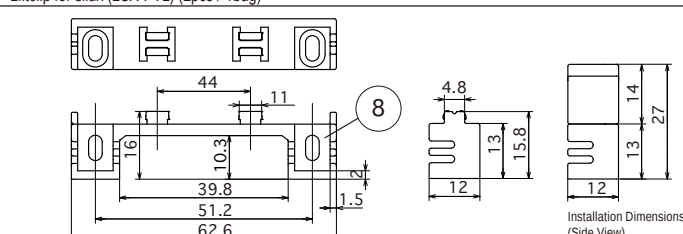

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

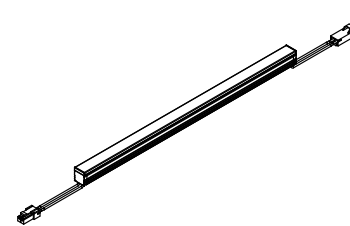	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 76g	Light Source color :	Item Number
	Power consumption : 2.1W	Number of LEDs : 98		
	Max. sets connectable : 6m			
	Environment : Indoors (No Condensation)			
	Operating temperature : 0°C~+35°C (No Condensation)			
	Accessories : Multiclip K (3pcs / 1 bag)			
	Option parts : Power supply cable 3000mm,			
	Joint cable 1000mm,			
	Multiclip K (3pcs / 1 bag)			
	Liftclip (2pcs / 1 bag)			
	Outerclip (5pcs / 1 bag)			
	Magnet attachment			
			Natural white : N : 5000K (106 lm * / Ra 93)	LSXK-0509-N-DF-I-4
			White : W : 4000K (106 lm * / Ra 94)	LSXK-0509-W-DF-I-4
			Warm white 3500K: WW : 3500K (102 lm * / Ra 94)	LSXK-0509-WW-DF-I-4
			Warm white 3000K : L30 : 3000K (99 lm * / Ra 93)	LSXK-0509-L30-DF-I-4
			Warm white 2700K : L27 : 2700K (95 lm / Ra 93)	LSXK-0509-L27-DF-I-4
			Warm white 2400K : L24 : 2400K (88 lm * / Ra 94)	LSXK-0509-L24-DF-I-4
			Warm white 2100K : L21 : 2100K (83 lm * / Ra 90)	LSXK-0509-L21-DF-I-4
			*=Equivalent	

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series


Luci silux K(4.3W/m)

Luci silux K(4.3W/m) 573



Luci

Luci Pte. Ltd.

2022.07.12

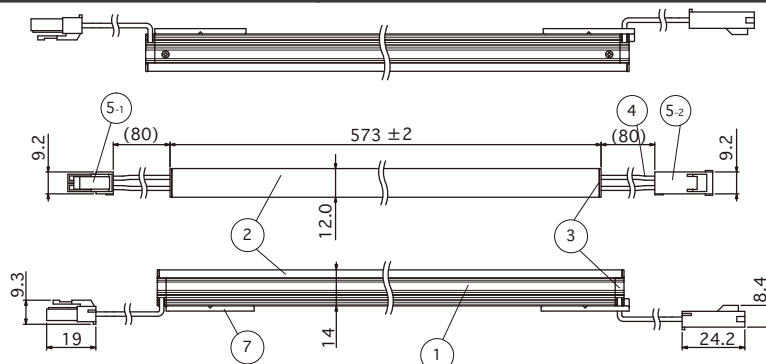



Installation Dimensions (Side View)

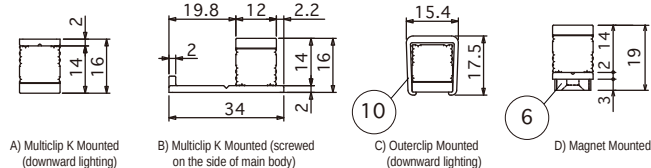


Option parts :

Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)


 Check the label on the DC + side for polarity.

Option parts :


Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Model number	L(mm)
CAD-1000-MCFC-I	1000 ± 15
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀

Accessories • Option parts :

Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

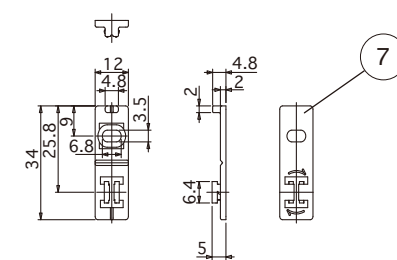


Option parts : Outerclip for silux (LSX-PT-A) (5pcs / 1bag)




Option parts :

Liftclip for silux (LSX-PTL) (2pcs / 1bag)

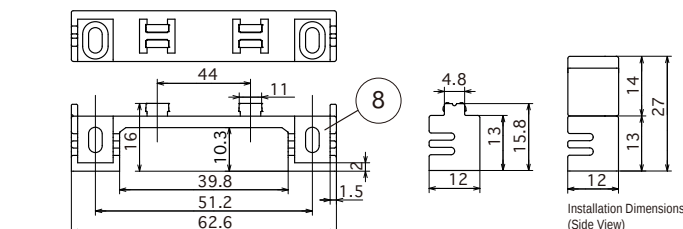

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

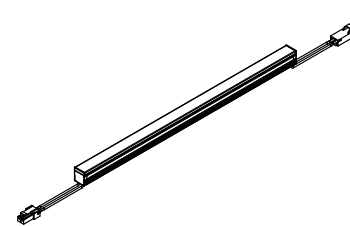	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 84g	Light Source color :	Item Number
Power consumption : 2.4W	Number of LEDs : 112		Natural white : N : 5000K (121 lm* / Ra 93)	LSXK-0573-N-DF-I-4
Max. sets connectable : 6m			White : W : 4000K (121 lm* / Ra 94)	LSXK-0573-W-DF-I-4
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (116 lm* / Ra 94)	LSXK-0573-WW-DF-I-4
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K : L30 : 3000K (114 lm* / Ra 93)	LSXK-0573-L30-DF-I-4
Accessories : Multiclip K (3pcs / 1bag)			Warm white 2700K : L27 : 2700K (109 lm* / Ra 93)	LSXK-0573-L27-DF-I-4
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (101 lm* / Ra 94)	LSXK-0573-L24-DF-I-4
Joint cable 1000mm,			Warm white 2100K : L21 : 2100K (95 lm* / Ra 90)	LSXK-0573-L21-DF-I-4
Multiclip K (3pcs / 1bag)				
Liftclip (2pcs / 1bag)				
Outerclip (5pcs / 1bag)				
Magnet attachment				

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)

Luci Pte. Ltd. http://www.luci.co.jp/ E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ Tel: +65-6291-2410	Shanghai China mainland Regional HQ Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727
Hong Kong Marketing Office Tel: +852-2219-8462 / Fax: +852-2219-8461	
Korea Office Tel: +82-2-508-2541	

silux series


Luci silux K(4.3W/m)

Luci silux K(4.3W/m) 702



Luci

Luci Pte. Ltd.

2022.07.12

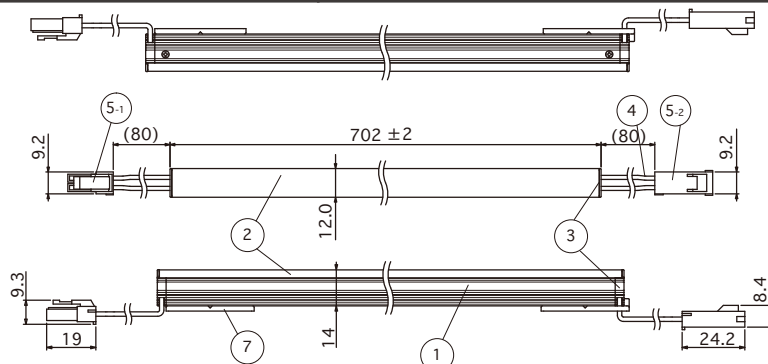


Installation Dimensions (Side View)

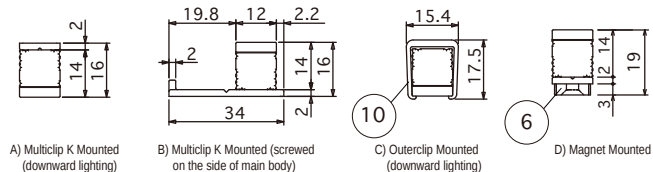


Option parts :

Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)


 Check the label on the DC + side for polarity.

Option parts :


Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Model number	L(mm)
CAD-1000-MCFC-I	1000 ± 15
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀

Accessories • Option parts :

Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

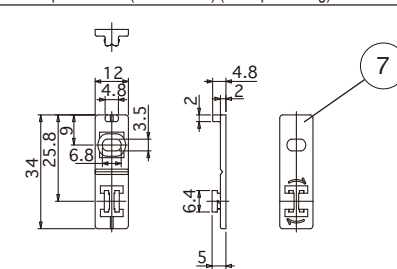


Option parts : Outerclip for silux (LSX-PT-A) (5pcs / 1bag)




Option parts :

Liftclip for silux (LSX-PTL) (2pcs / 1bag)

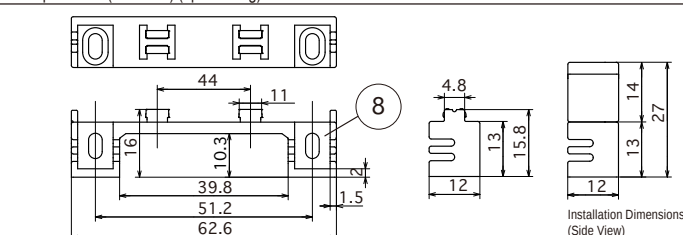

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

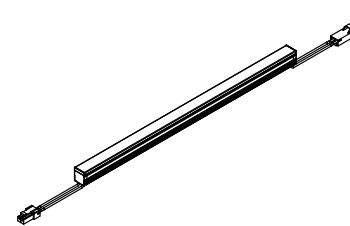	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 110g	Light Source color :	Item Number
Power consumption : 3.0W	Number of LEDs : 140		Natural white : N : 5000K (152 lm* / Ra 93)	LSXK-0702-N-DF-I-4
Max. sets connectable : 6m			White : W : 4000K (152 lm* / Ra 94)	LSXK-0702-W-DF-I-4
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (145 lm* / Ra 94)	LSXK-0702-WW-DF-I-4
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K : L30 : 3000K (142 lm* / Ra 93)	LSXK-0702-L30-DF-I-4
Accessories : Multiclip K (3pcs / 1 bag)			Warm white 2700K : L27 : 2700K (136 lm* / Ra 93)	LSXK-0702-L27-DF-I-4
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (126 lm* / Ra 94)	LSXK-0702-L24-DF-I-4
Joint cable 1000mm,			Warm white 2100K : L21 : 2100K (118 lm* / Ra 90)	LSXK-0702-L21-DF-I-4
Multiclip K (3pcs / 1 bag)				
Liftclip (2pcs / 1 bag)				
Outerclip (5pcs / 1 bag)				
Magnet attachment				

* = Equivalent

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series


Luci silux K(4.3W/m)

Luci silux K(4.3W/m) 823



Luci

Luci Pte. Ltd.

2022.07.12

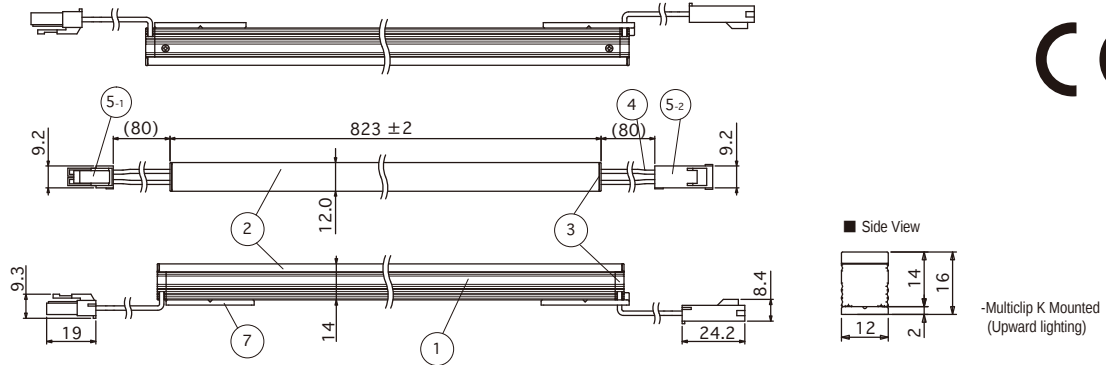



Installation Dimensions (Side View)

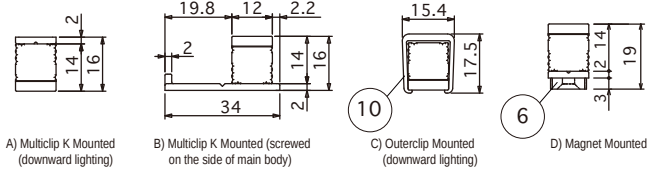


Option parts :

Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)




Option parts :

Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Accessories • Option parts :

Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

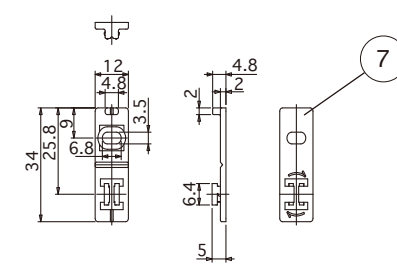


Option parts : Outerclip for silux

(LSX-PT-A) (5pcs / 1bag)




Option parts :

Liftclip for silux (LSX-PTL) (2pcs / 1bag)

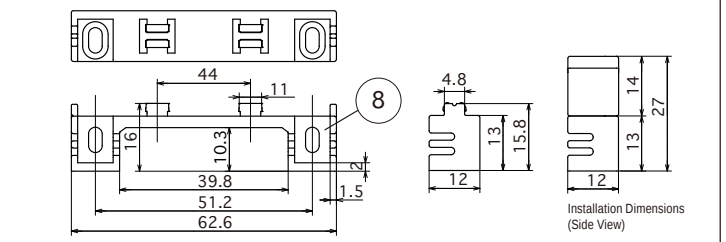

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

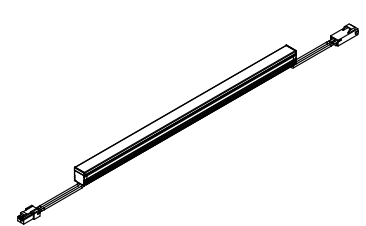	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 120g	Light Source color :	Item Number
Power consumption : 3.5W	Number of LEDs : 161		Natural white : N : 5000K (175 lm* / Ra 93)	LSXK-0823-N-DF-I-4
Max. sets connectable : 6m			White : W : 4000K (175 lm* / Ra 94)	LSXK-0823-W-DF-I-4
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (167 lm* / Ra 94)	LSXK-0823-WW-DF-I-4
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K : L30 : 3000K (164 lm* / Ra 93)	LSXK-0823-L30-DF-I-4
Accessories : Multiclip K (5pcs / 1bag)			Warm white 2700K : L27 : 2700K (156 lm* / Ra 93)	LSXK-0823-L27-DF-I-4
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (145 lm* / Ra 94)	LSXK-0823-L24-DF-I-4
Joint cable 1000mm,			Warm white 2100K : L21 : 2100K (136 lm* / Ra 90)	LSXK-0823-L21-DF-I-4
Multiclip K (3pcs / 1bag)				
Liftclip (2pcs / 1bag)				
Outerclip (5pcs / 1bag)				
Magnet attachment				

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series


Luci silux K(4.3W/m)

Luci silux K(4.3W/m) 1008




Luci

Luci Pte. Ltd.





2022.07.12

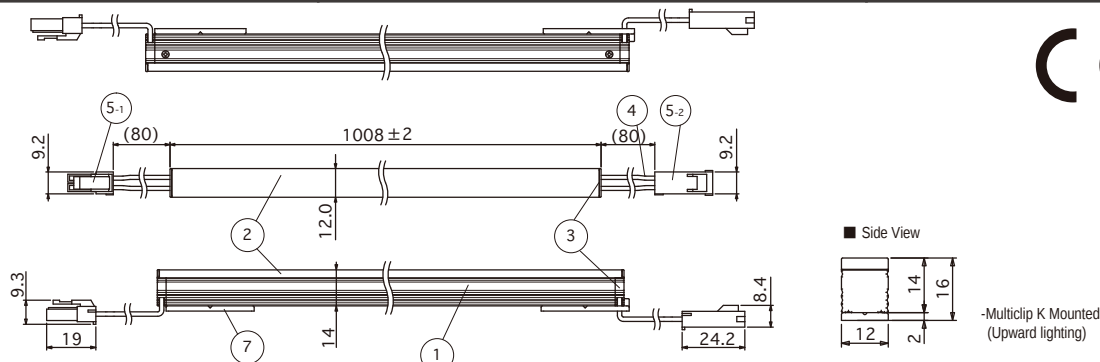

Installation Dimensions (Side View)

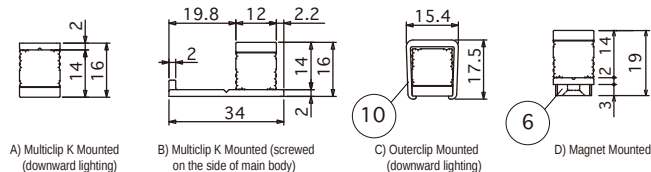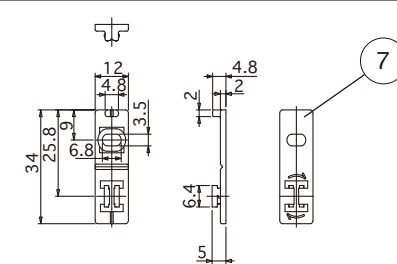
Accessories • Option parts :
Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

Option parts : Outerclip for silux (LSX-PT-A) (5pcs / 1bag)

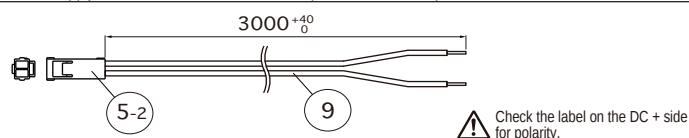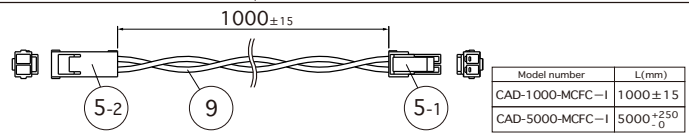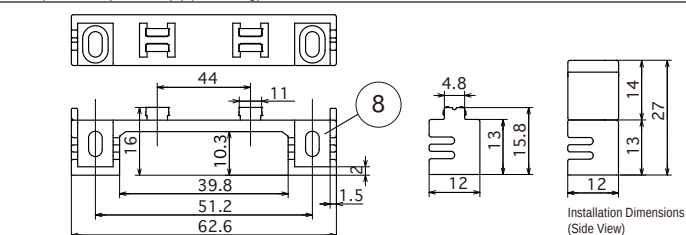Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCNN-I)Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)Option parts :
Liftclip for silux (LSX-PTL) (2pcs / 1bag)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

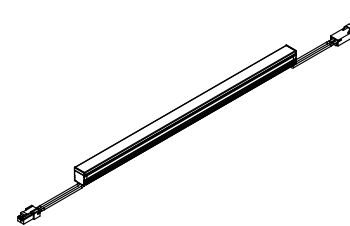	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 145g	Light Source color :	Item Number
Power consumption : 4.3W	Number of LEDs : 196		Natural white : N : 5000K (213 lm* / Ra 93)	LSXK-1008-N-DF-I-4 LSXK-1008-W-DF-I-4 LSXK-1008-WW-DF-I-4 LSXK-1008-L30-DF-I-4 LSXK-1008-L27-DF-I-4 LSXK-1008-L24-DF-I-4 LSXK-1008-L21-DF-I-4
Max. sets connectable : 6m			White : W : 4000K (213 lm* / Ra 94)	
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (204 lm* / Ra 94)	
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K : L30 : 3000K (199 lm* / Ra 93)	
Accessories : Multiclip K (5pcs / 1bag)			Warm white 2700K : L27 : 2700K (190 lm* / Ra 93)	
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (177 lm* / Ra 94)	
Joint cable 1000mm,			Warm white 2100K : L21 : 2100K (166 lm* / Ra 90)	
Multiclip K (3pcs / 1bag)				
Liftclip (2pcs / 1bag)				
Outerclip (5pcs / 1bag)				
Magnet attachment				

*=Equivalent

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series


Luci silux K(4.3W/m)

Luci silux K(4.3W/m) 1137



Luci

Luci Pte. Ltd.

2022.07.12

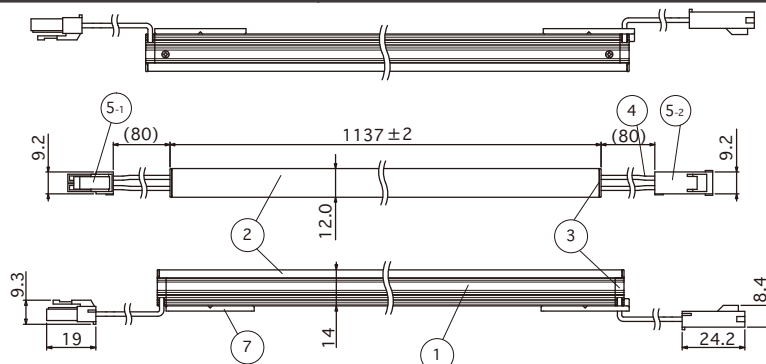


Installation Dimensions (Side View)

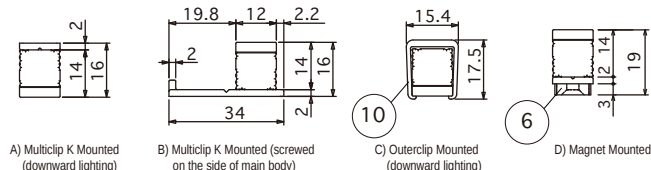


Option parts :

Power supply cable 3000mm for SL connector (CAD-3000-MCNN-I)


 Check the label on the DC + side for polarity.

Option parts :


Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Model number	L(mm)
CAD-1000-MCFC-I	1000 ^{±15}
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀

Accessories • Option parts :

Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

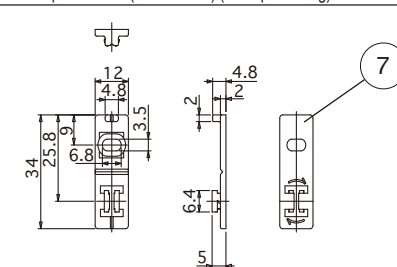


Option parts : Outerclip for silux (LSX-PT-A) (5pcs / 1bag)




Option parts :

Liftclip for silux (LSX-PTL) (2pcs / 1bag)

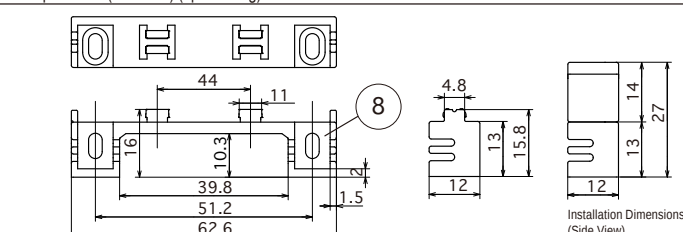

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

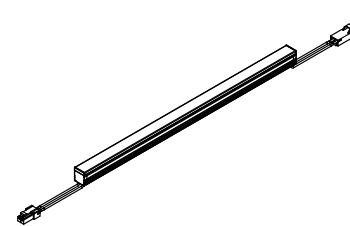	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 160g	Light Source color :	Item Number
Power consumption : 4.9W	Number of LEDs : 224		Natural white : N : 5000K (243 lm* / Ra 93)	LSXK-1137-N-DF-I-4 LSXK-1137-W-DF-I-4 LSXK-1137-WW-DF-I-4 LSXK-1137-L30-DF-I-4 LSXK-1137-L27-DF-I-4 LSXK-1137-L24-DF-I-4 LSXK-1137-L21-DF-I-4
Max. sets connectable : 6m			White : W : 4000K (243 lm* / Ra 94)	
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (233 lm* / Ra 94)	
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K : L30 : 3000K (228 lm* / Ra 93)	
Accessories : Multiclip K (5pcs / 1 bag)			Warm white 2700K : L27 : 2700K (218 lm* / Ra 93)	
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (202 lm* / Ra 94)	
Joint cable 1000mm,			Warm white 2100K : L21 : 2100K (190 lm* / Ra 90)	
Multiclip K (3pcs / 1 bag)				
Liftclip (2pcs / 1 bag)				
Outerclip (5pcs / 1 bag)				
Magnet attachment				

* = Equivalent

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series


Luci silux K(4.3W/m)

Luci silux K(4.3W/m) 1451



Luci

Luci Pte. Ltd.

2022.07.12

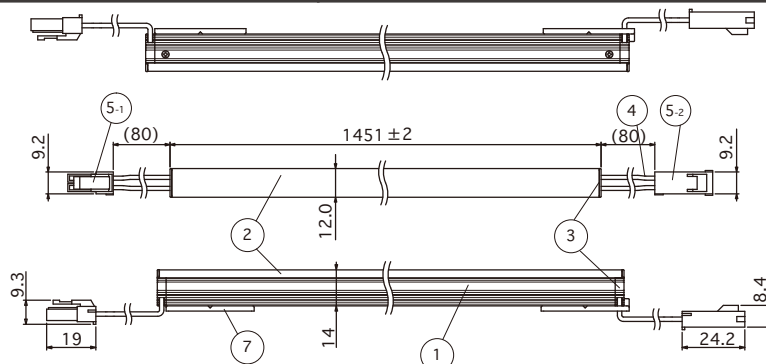



Installation Dimensions (Side View)

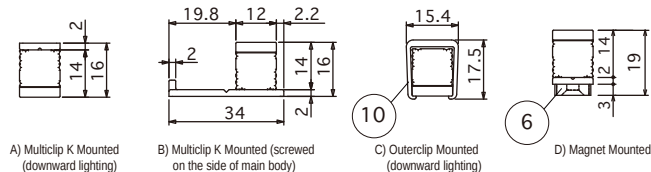


Option parts :

Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)


 Check the label on the DC + side for polarity.

Option parts :


Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Model number	L(mm)
CAD-1000-MCFC-I	1000 ^{±15}
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀

Accessories • Option parts :

Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

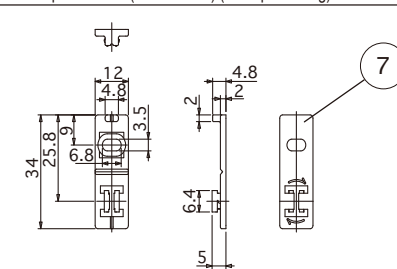


Option parts : Outerclip for silux (LSX-PT-A) (5pcs / 1bag)




Option parts :

Liftclip for silux (LSX-PTL) (2pcs / 1bag)

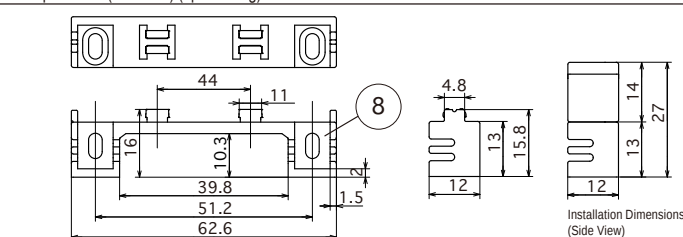

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

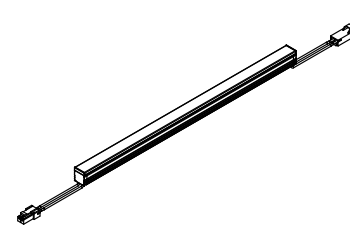	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 206g	Light Source color :	Item Number
Power consumption : 6.3W	Number of LEDs : 287		Natural white : N : 5000K (312 lm* / Ra 93)	LSXK-1451-N-DF-I-4
Max. sets connectable : 6m			White : W : 4000K (312 lm* / Ra 94)	LSXK-1451-W-DF-I-4
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (299 lm* / Ra 94)	LSXK-1451-WW-DF-I-4
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K : L30 : 3000K (292 lm* / Ra 93)	LSXK-1451-L30-DF-I-4
Accessories : Multiclip K (5pcs / 1bag)			Warm white 2700K : L27 : 2700K (279 lm* / Ra 93)	LSXK-1451-L27-DF-I-4
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (259 lm* / Ra 94)	LSXK-1451-L24-DF-I-4
Joint cable 1000mm,			Warm white 2100K : L21 : 2100K (243 lm* / Ra 90)	LSXK-1451-L21-DF-I-4
Multiclip K (3pcs / 1bag)				
Liftclip (2pcs / 1bag)				
Outerclip (5pcs / 1bag)				
Magnet attachment				

*=Equivalent

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series


Luci silux K(8.1W/m)

Luci silux K(8.1W/m) 74


Luci

Luci Pte. Ltd.






2022.07.12

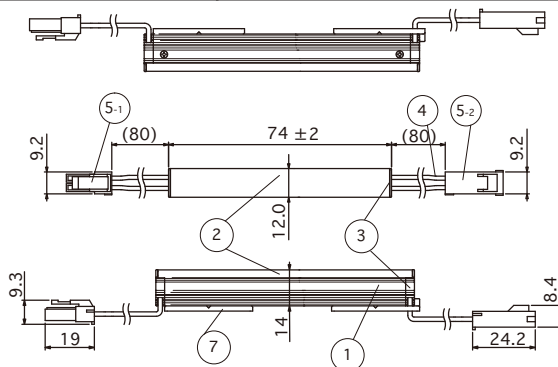


Side View

-Multiclip K Mounted
(Upward lighting)

Installation Dimensions (Side View)

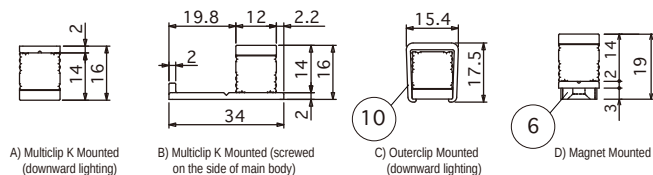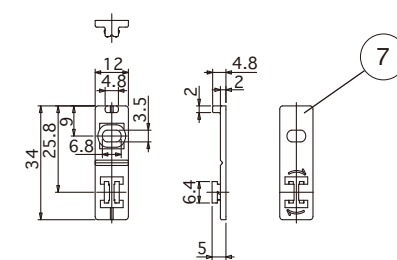
Accessories • Option parts :
Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)Option parts : Outerclip for silux
(LSX-PT-A) (5pcs / 1bag)Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)
 Check the label on the DC + side for polarity.
Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)

Model number	L(mm)
CAD-1000-MCFC-I	1000 ± 15
CAD-5000-MCFC-I	5000 ± 250 0

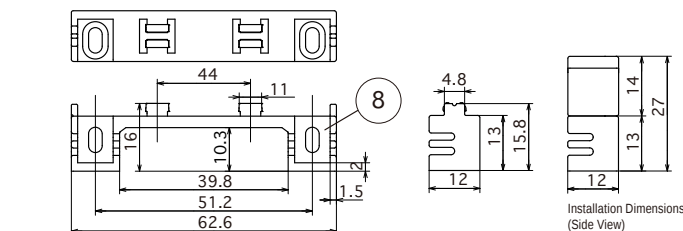Option parts :
Liftclip for silux (LSX-PTL) (2pcs / 1bag)Installation Dimensions
(Side View)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 15g	Light Source color :	Item Number
	Power consumption : 0.5W	Number of LEDs : 14	Natural white : N : 5000K (32 lm* / Ra 93)	LSXK-0074-N-DF-I-8 LSXK-0074-W-DF-I-8 LSXK-0074-WW-DF-I-8 LSXK-0074-L30-DF-I-8 LSXK-0074-L27-DF-I-8 LSXK-0074-L24-DF-I-8 LSXK-0074-L21-DF-I-8
	Max. sets connectable : 6m		White : W : 4000K (32 lm* / Ra 94)	
	Environment : Indoors (No Condensation)		Warm white 3500K : WW : 3500K (30 lm* / Ra 94)	
	Operating temperature : 0°C ~ +35°C (No Condensation)		Warm white 3000K : L30 : 3000K (30 lm* / Ra 93)	
	Accessories : Multiclip K (3pcs / 1 bag)		Warm white 2700K : L27 : 2700K (28 lm* / Ra 93)	
	Option parts : Power supply cable 3000mm,		Warm white 2400K : L24 : 2400K (26 lm* / Ra 94)	
	Joint cable 1000mm,		Warm white 2100K : L24 : 2400K (25 lm* / Ra 94)	
	Multiclip K (3pcs / 1 bag)			
	Liftclip (2pcs / 1 bag)			
	Outerclip (5pcs / 1 bag)			
	Magnet attachment			

*=Equivalent

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series


Luci silux K(8.1W/m)

Luci silux K(8.1W/m) 259



Luci

Luci Pte. Ltd.

2022.07.12

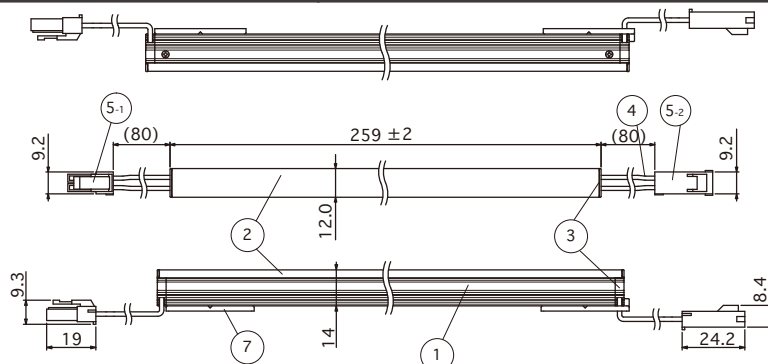


Installation Dimensions (Side View)

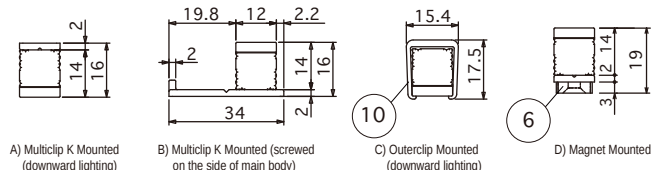


Option parts :

Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)


 Check the label on the DC + side for polarity.

Option parts :


Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Model number	L(mm)
CAD-1000-MCFC-I	1000 ^{±15}
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀

Accessories • Option parts :

Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

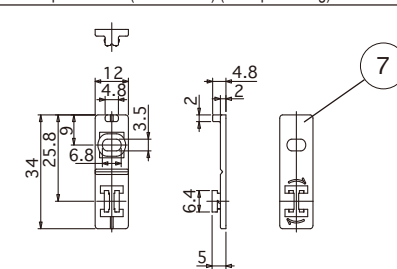


Option parts : Outerclip for silux (LSX-PT-A) (5pcs / 1bag)




Option parts :

Liftclip for silux (LSX-PTL) (2pcs / 1bag)

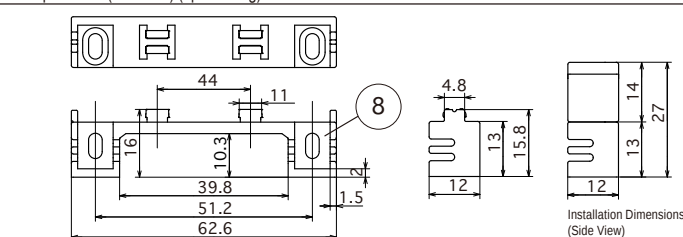

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 40g	Light Source color :	Item Number
Power consumption : 2.0W	Number of LEDs : 49		Natural white : N : 5000K (112 lm* / Ra 93)	LSXK-0259-N-DF-I-8
Max. sets connectable : 6m			White : W : 4000K (112 lm* / Ra 94)	LSXK-0259-W-DF-I-8
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (107 lm* / Ra 94)	LSXK-0259-WW-DF-I-8
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K : L30 : 3000K (105 lm* / Ra 93)	LSXK-0259-L30-DF-I-8
Accessories : Multiclip K (3pcs / 1 bag)			Warm white 2700K : L27 : 2700K (100 lm* / Ra 93)	LSXK-0259-L27-DF-I-8
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (93 lm* / Ra 94)	LSXK-0259-L24-DF-I-8
Joint cable 1000mm,			Warm white 2100K : L21 : 2100K (87 lm* / Ra 90)	LSXK-0259-L21-DF-I-8
Multiclip K (3pcs / 1 bag)				
Liftclip (2pcs / 1 bag)				
Outerclip (5pcs / 1 bag)				
Magnet attachment				

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series


Luci silux K(8.1W/m)

Luci silux K(8.1W/m) 388



Luci

Luci Pte. Ltd.

2022.07.12

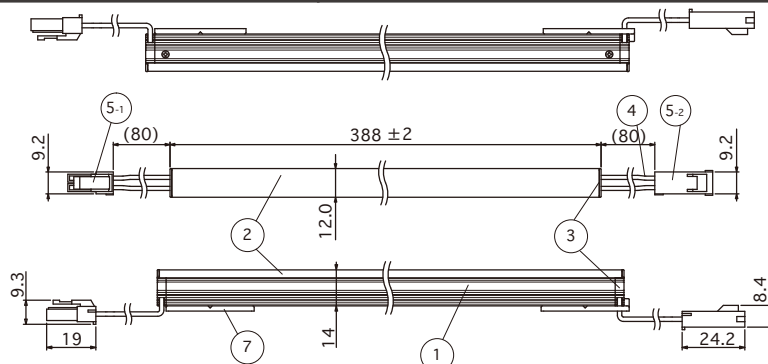


Installation Dimensions (Side View)

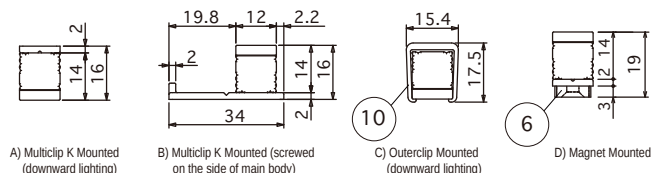


Option parts :

Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)


 Check the label on the DC + side for polarity.

Option parts :


Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Model number	L(mm)
CAD-1000-MCFC-I	1000 ^{±15}
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀

Accessories • Option parts :

Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

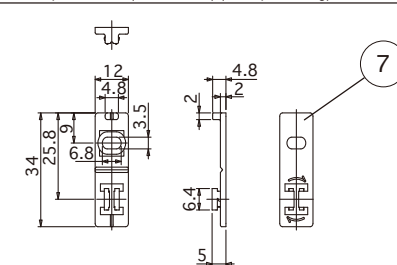


Option parts : Outerclip for silux (LSX-PT-A) (5pcs / 1bag)




Option parts :

Liftclip for silux (LSX-PTL) (2pcs / 1bag)

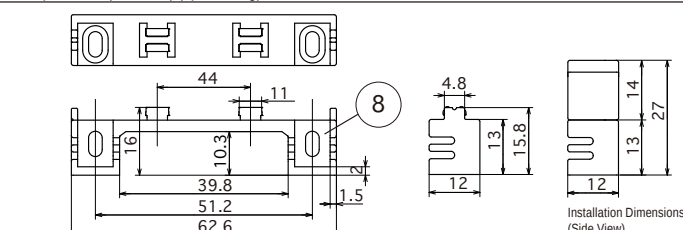

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

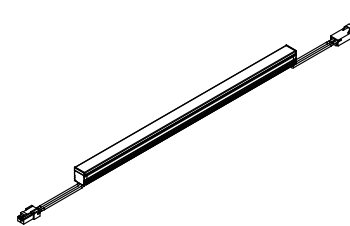	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 59g	Light Source color :	Item Number
Power consumption : 3.1W	Number of LEDs : 77		Natural white : N : 5000K (177 lm* / Ra 93)	LSXK-0388-N-DF-I-8
Max. sets connectable : 6m			White : W : 4000K (177 lm* / Ra 94)	LSXK-0388-W-DF-I-8
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (169 lm* / Ra 94)	LSXK-0388-WW-DF-I-8
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K : L30 : 3000K (165 lm* / Ra 93)	LSXK-0388-L30-DF-I-8
Accessories : Multiclip K (3pcs / 1 bag)			Warm white 2700K : L27 : 2700K (158 lm* / Ra 93)	LSXK-0388-L27-DF-I-8
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (146 lm* / Ra 94)	LSXK-0388-L24-DF-I-8
Joint cable 1000mm,			Warm white 2100K : L21 : 2100K (137 lm* / Ra 90)	LSXK-0388-L21-DF-I-8
Multiclip K (3pcs / 1 bag)				
Liftclip (2pcs / 1 bag)				
Outerclip (5pcs / 1 bag)				
Magnet attachment				

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series


Luci silux K(8.1W/m)

Luci silux K(8.1W/m) 573



Luci

Luci Pte. Ltd.

2022.07.12

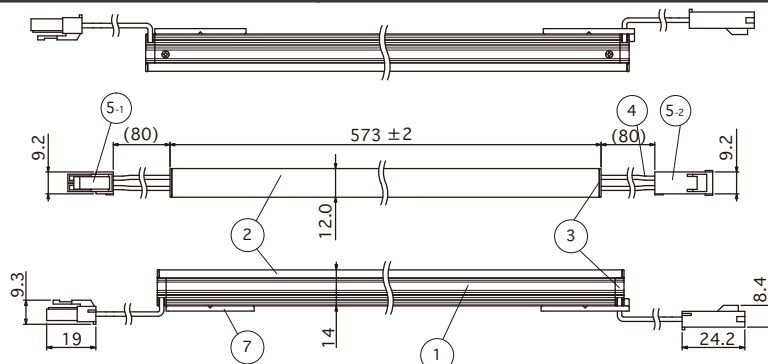


Installation Dimensions (Side View)

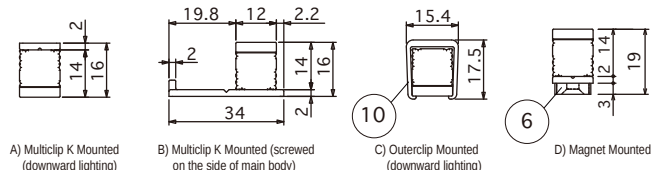


Option parts :

Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)


 Check the label on the DC + side for polarity.

Option parts :


Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Model number	L(mm)
CAD-1000-MCFC-I	1000 ^{±15}
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀

Accessories • Option parts :

Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

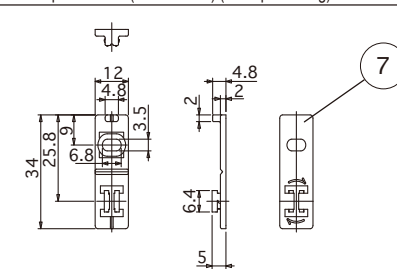


Option parts : Outerclip for silux (LSX-PT-A) (5pcs / 1bag)




Option parts :

Liftclip for silux (LSX-PTL) (2pcs / 1bag)

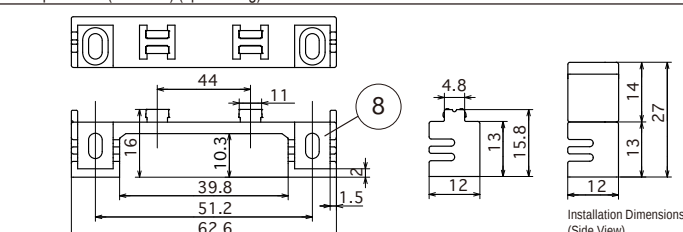

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

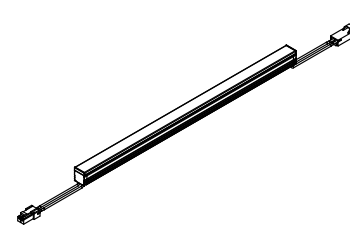	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 84g	Light Source color :	Item Number
Power consumption : 4.6W	Number of LEDs : 112		Natural white : N : 5000K (257 lm* / Ra 93)	LSXK-0573-N-DF-I-8
Max. sets connectable : 6m			White : W : 4000K (257 lm* / Ra 94)	LSXK-0573-W-DF-I-8
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (246 lm* / Ra 94)	LSXK-0573-WW-DF-I-8
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K : L30 : 3000K (241 lm* / Ra 93)	LSXK-0573-L30-DF-I-8
Accessories : Multiclip K (3pcs / 1 bag)			Warm white 2700K : L27 : 2700K (230 lm* / Ra 93)	LSXK-0573-L27-DF-I-8
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (213 lm* / Ra 94)	LSXK-0573-L24-DF-I-8
Joint cable 1000mm,			Warm white 2100K : L21 : 2100K (200 lm* / Ra 90)	LSXK-0573-L21-DF-I-8
Multiclip K (3pcs / 1 bag)				
Liftclip (2pcs / 1 bag)				
Outerclip (5pcs / 1 bag)				
Magnet attachment				

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series


Luci silux K(8.1W/m)

Luci silux K(8.1W/m) 702


Luci

Luci Pte. Ltd.







2022.07.12

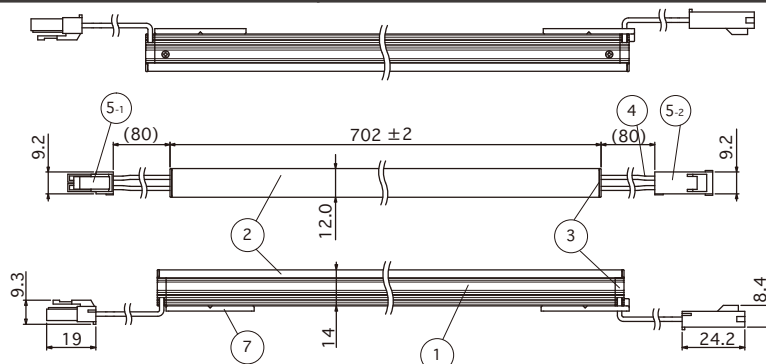

Side View

-Multiclip K Mounted
(Upward lighting)


Installation Dimensions (Side View)

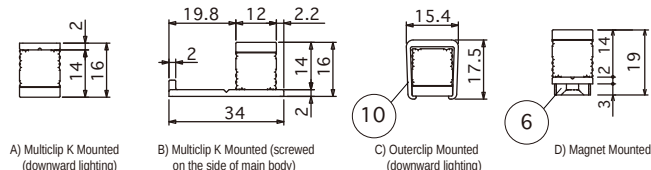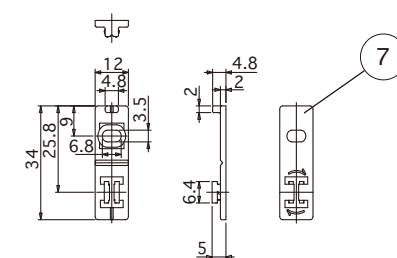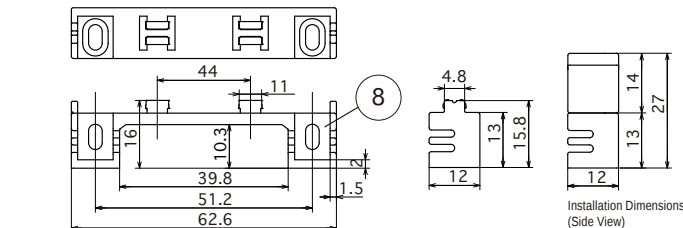Accessories • Option parts :
Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)Option parts : Outerclip for silux
(LSX-PT-A) (5pcs / 1bag)Option parts :
Liftclip for silux (LSX-PTL) (2pcs / 1bag)Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)⚠ Check the label on the DC + side
for polarity.Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)

Model number	L(mm)
CAD-1000-MCFC-I	1000 ± 15
CAD-5000-MCFC-I	5000 +250/-0

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

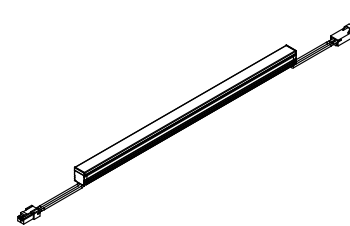	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 110g	Light Source color :	Item Number
Power consumption : 5.7W	Number of LEDs : 140		Natural white : N : 5000K (321 lm* / Ra 93)	LSXK-0702-N-DF-I-8
Max. sets connectable : 6m			White : W : 4000K (321 lm* / Ra 94)	LSXK-0702-W-DF-I-8
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (308 lm* / Ra 94)	LSXK-0702-WW-DF-I-8
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K : L30 : 3000K (301 lm* / Ra 93)	LSXK-0702-L30-DF-I-8
Accessories : Multiclip K (3pcs / 1 bag)			Warm white 2700K : L27 : 2700K (287 lm* / Ra 93)	LSXK-0702-L27-DF-I-8
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (267 lm* / Ra 94)	LSXK-0702-L24-DF-I-8
Joint cable 1000mm,			Warm white 2100K : L21 : 2100K (250 lm* / Ra 90)	LSXK-0702-L21-DF-I-8
Multiclip K (3pcs / 1 bag)				
Liftclip (2pcs / 1 bag)				
Outerclip (5pcs / 1 bag)				
Magnet attachment				

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series


Luci silux K(8.1W/m)

Luci silux K(8.1W/m) 823



Luci

Luci Pte. Ltd.


2022.07.12

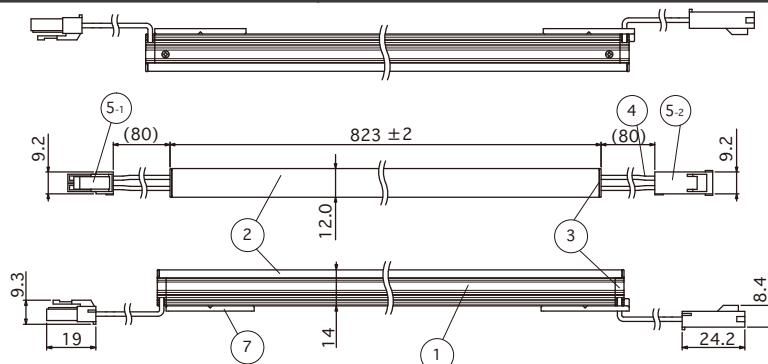■ Side View

-Multiclip K Mounted
(Upward lighting)


Installation Dimensions (Side View)

A) Multiclip K Mounted
(downward lighting)B) Multiclip K Mounted (screwed
on the side of main body)C) Outerclip Mounted
(downward lighting)

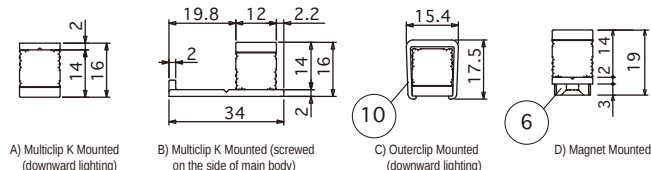D) Magnet Mounted


Option parts :

Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)

⚠ Check the label on the DC + side
for polarity.

Option parts :



Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)



Model number	L(mm)
CAD-1000-MCFC-I	1000 ± 15
CAD-5000-MCFC-I	5000 ± 250 0


Accessories • Option parts :

Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

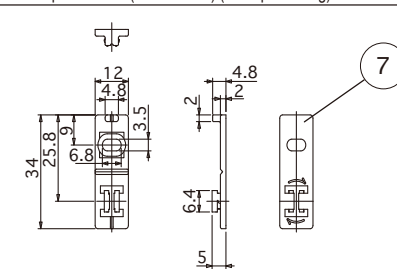Option parts : Outerclip for silux
(LSX-PT-A) (5pcs / 1bag)


Option parts :

Liftclip for silux (LSX-PTL) (2pcs / 1bag)

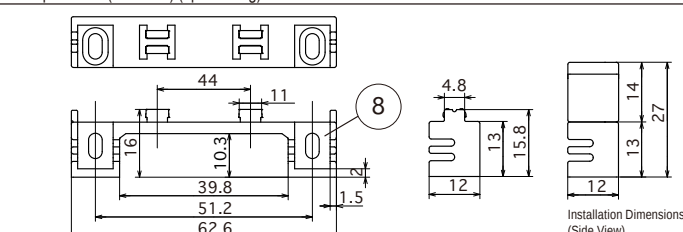Installation Dimensions
(Side View)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

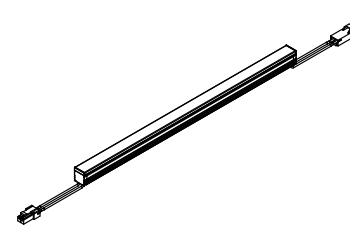	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 120g	Light Source color :	Item Number
Power consumption : 6.6W	Number of LEDs : 161		Natural white : N : 5000K (370 lm* / Ra 93)	LSXK-0823-N-DF-I-8
Max. sets connectable : 6m			White : W : 4000K (370 lm* / Ra 94)	LSXK-0823-W-DF-I-8
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (354 lm* / Ra 94)	LSXK-0823-WW-DF-I-8
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K : L30 : 3000K (346 lm* / Ra 93)	LSXK-0823-L30-DF-I-8
Accessories : Multiclip K (5pcs / 1 bag)			Warm white 2700K : L27 : 2700K (330 lm* / Ra 93)	LSXK-0823-L27-DF-I-8
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (307 lm* / Ra 94)	LSXK-0823-L24-DF-I-8
Joint cable 1000mm,			Warm white 2100K : L21 : 2100K (288 lm* / Ra 90)	LSXK-0823-L21-DF-I-8
Multiclip K (3pcs / 1 bag)				
Liftclip (2pcs / 1 bag)				
Outerclip (5pcs / 1 bag)				
Magnet attachment				

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series


Luci silux K(8.1W/m)

Luci silux K(8.1W/m) 1008




Luci Pte. Ltd.

2022.07.12

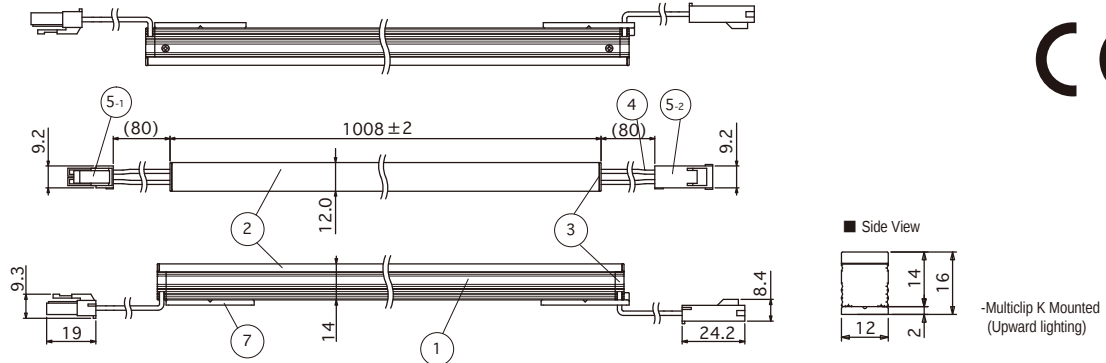


Installation Dimensions (Side View)

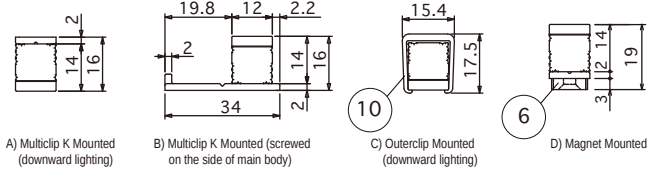

Option parts :


Power supply cable 3000mm for SL connector (CAD-3000-MCNN-I)



⚠ Check the label on the DC + side for polarity.

Option parts :


Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)



Model number	L(mm)
CAD-1000-MCFC-I	1000 $\pm$ 15
CAD-5000-MCFC-I	5000 $\pm$ 250 ₀


Accessories • Option parts :

Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

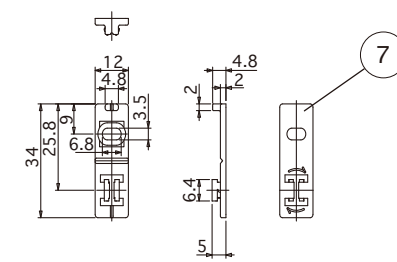


Option parts : Outerclip for silux

(LSX-PT-A) (5pcs / 1bag)



Option parts :

Liftclip for silux (LSX-PTL) (2pcs / 1bag)

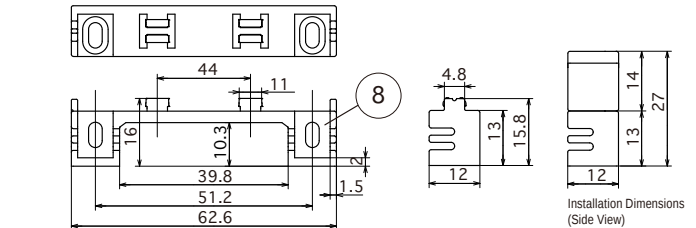

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 145g	Light Source color :	Item Number
Power consumption : 8.1W	Number of LEDs : 196		Natural white : N : 5000K (450 lm* / Ra 93)	LSXK-1008-N-DF-I-8 LSXK-1008-W-DF-I-8 LSXK-1008-WW-DF-I-8 LSXK-1008-L30-DF-I-8 LSXK-1008-L27-DF-I-8 LSXK-1008-L24-DF-I-8 LSXK-1008-L21-DF-I-8
Max. sets connectable : 6m			White : W : 4000K (450 lm* / Ra 94)	
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (431 lm* / Ra 94)	
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K : L30 : 3000K (421 lm* / Ra 93)	
Accessories : Multiclip K (5pcs / 1 bag)			Warm white 2700K : L27 : 2700K (402 lm* / Ra 93)	
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (373 lm* / Ra 94)	
Joint cable 1000mm,			Warm white 2100K : L21 : 2100K (351 lm* / Ra 90)	
Multiclip K (3pcs / 1 bag)				
Liftclip (2pcs / 1 bag)				
Outerclip (5pcs / 1 bag)				
Magnet attachment				

* = Equivalent

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series


Luci silux K(8.1W/m)

Luci silux K(8.1W/m) 1137



Luci

Luci Pte. Ltd.

2022.07.12

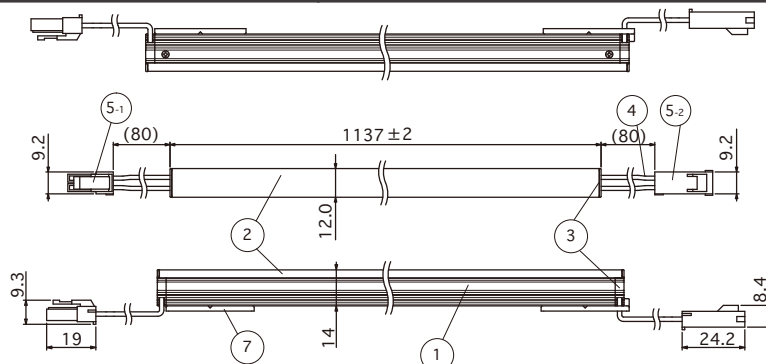


Installation Dimensions (Side View)

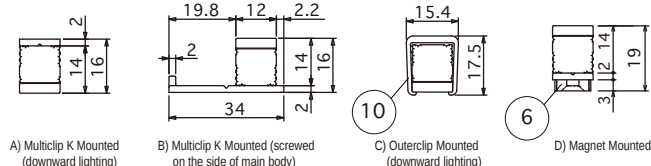


Option parts :

Power supply cable 3000mm for SL connector (CAD-3000-MCNN-I)


 Check the label on the DC + side for polarity.

Option parts :


Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Model number	L(mm)
CAD-1000-MCFC-I	1000 ± 15
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀

Accessories • Option parts :

Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

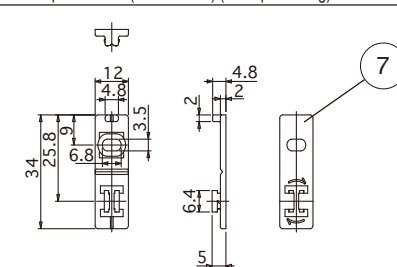


Option parts : Outerclip for silux (LSX-PT-A) (5pcs / 1bag)




Option parts :

Liftclip for silux (LSX-PTL) (2pcs / 1bag)

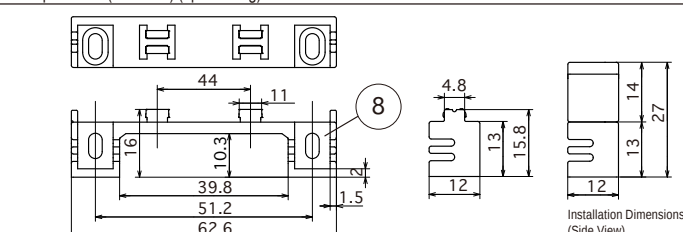

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

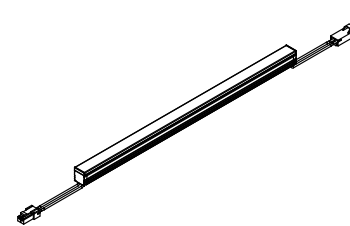	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 160g	Light Source color :	Item Number
Power consumption : 9.2W	Number of LEDs : 224		Natural white : N : 5000K (515 lm* / Ra 93)	LSXK-1137-N-DF-I-8
Max. sets connectable : 6m			White : W : 4000K (515 lm* / Ra 94)	LSXK-1137-W-DF-I-8
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (493 lm* / Ra 94)	LSXK-1137-WW-DF-I-8
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K : L30 : 3000K (482 lm* / Ra 93)	LSXK-1137-L30-DF-I-8
Accessories : Multiclip K (5pcs / 1bag)			Warm white 2700K : L27 : 2700K (460 lm* / Ra 93)	LSXK-1137-L27-DF-I-8
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (427 lm* / Ra 94)	LSXK-1137-L24-DF-I-8
Joint cable 1000mm,			Warm white 2100K : L21 : 2100K (401 lm* / Ra 94)	LSXK-1137-L21-DF-I-8
Multiclip K (3pcs / 1bag)				
Liftclip (2pcs / 1bag)				
Outerclip (5pcs / 1bag)				
Magnet attachment				

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series


Luci silux K(13.3W/m)

Luci silux K(13.3W/m) 74



Luci

Luci Pte. Ltd.


2022.07.12

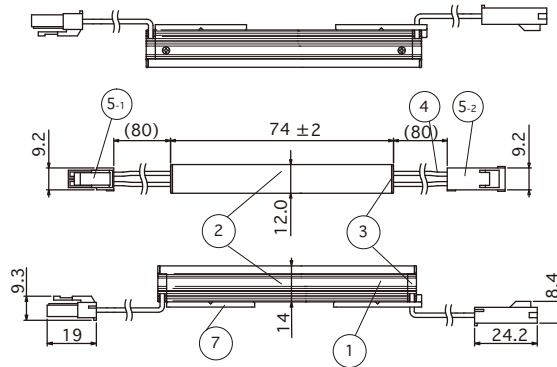Side View

-Multiclip K Mounted
(Upward lighting)


Installation Dimensions (Side View)

A) Multiclip K Mounted
(downward lighting)B) Multiclip K Mounted (screwed
on the side of main body)C) Outerclip Mounted
(downward lighting)

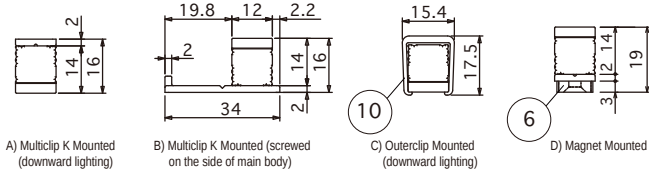D) Magnet Mounted


Option parts :

Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)


 Check the label on the DC + side
for polarity.

Option parts :


Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)



Model number	L(mm)
CAD-1000-MCFC-I	1000 ± 15
CAD-5000-MCFC-I	5000 ± 250


Accessories • Option parts :

Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

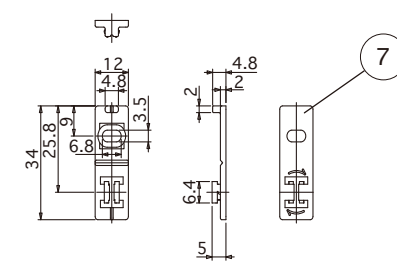


Option parts : Outerclip for silux

(LSX-PT-A) (5pcs / 1bag)




Option parts :

Liftclip for silux (LSX-PTL) (2pcs / 1bag)

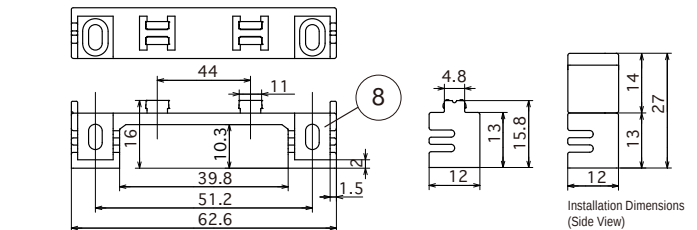Installation Dimensions
(Side View)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 15g	Light Source color :	Item Number
Power consumption : 0.7W	Number of LEDs : 12		Natural white : N : 5000K (38 lm* / Ra 93)	LSXK-0074-N-DF-I-13 LSXK-0074-W-DF-I-13 LSXK-0074-WW-DF-I-13 LSXK-0074-L30-DF-I-13 LSXK-0074-L27-DF-I-13 LSXK-0074-L24-DF-I-13
Max. sets connectable : 6m			White : W : 4000K (38 lm* / Ra 94)	
Environment : Indoors (No Condensation)			Warm white 3500K: WW : 3500K (37 lm* / Ra 94)	
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K: L30 : 3000K (36 lm* / Ra 93)	
Accessories : Multiclip K (3pcs / 1 bag)			Warm white 2700K: L27 : 2700K (34 lm* / Ra 93)	
Option parts : Power supply cable 3000mm,			Warm white 2400K: L24 : 2400K (32 lm* / Ra 94)	
Joint cable 1000mm,				
Multiclip K (3pcs / 1 bag)				
Liftclip (2pcs / 1 bag)				
Outerclip (5pcs / 1 bag)				
Magnet attachment				

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series


Luci silux K(13.3W/m)

Luci silux K(13.3W/m) 259



Luci

Luci Pte. Ltd.

2022.07.12

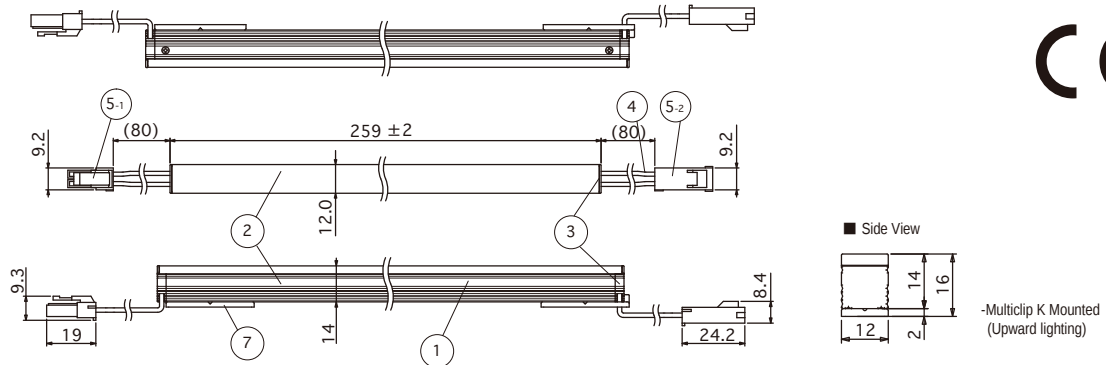


Installation Dimensions (Side View)

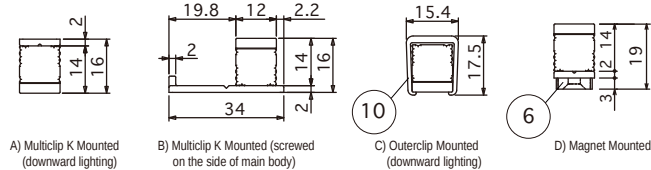


Option parts :

Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)

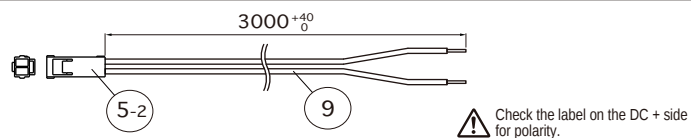


Option parts :

Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)

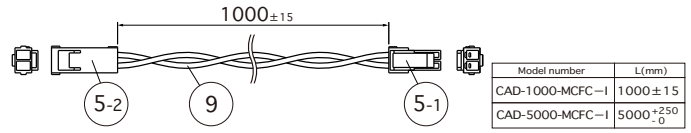


Accessories • Option parts :

Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

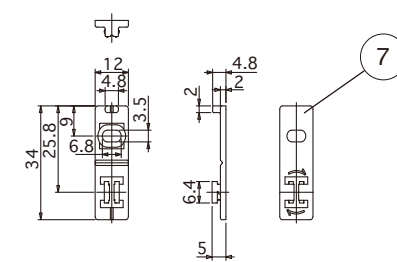


Option parts : Outerclip for silux (LSX-PT-A) (5pcs / 1bag)




Option parts :

Liftclip for silux (LSX-PTL) (2pcs / 1bag)

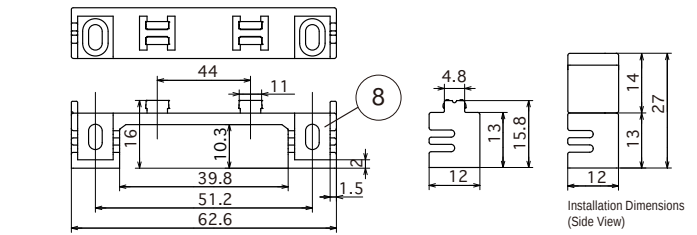

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black+, white-	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 40g	Light Source color :	Item Number
Power consumption : 3.3W	Number of LEDs : 49		Natural white : N : 5000K (155 lm* / Ra 93)	LSXK-0259-N-DF-I-13 LSXK-0259-W-DF-I-13 LSXK-0259-WW-DF-I-13 LSXK-0259-L30-DF-I-13 LSXK-0259-L27-DF-I-13 LSXK-0259-L24-DF-I-13
Max. sets connectable : 6m			White : W : 4000K (155 lm* / Ra 94)	
Environment : Indoors (No Condensation)			Warm white 3500K: WW : 3500K (148 lm* / Ra 94)	
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K: L30 : 3000K (145 lm* / Ra 93)	
Accessories : Multiclip K (3pcs / 1bag)			Warm white 2700K: L27 : 2700K (138 lm / Ra 93)	
Option parts : Power supply cable 3000mm,			Warm white 2400K: L24 : 2400K (128 lm* / Ra 94)	
Joint cable 1000mm,				
Multiclip K (3pcs / 1bag)				
Liftclip (2pcs / 1bag)				
Outerclip (5pcs / 1bag)				
Magnet attachment				

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series


Luci silux K(13.3W/m)

Luci silux K(13.3W/m) 388



Luci

Luci Pte. Ltd.

2022.07.12

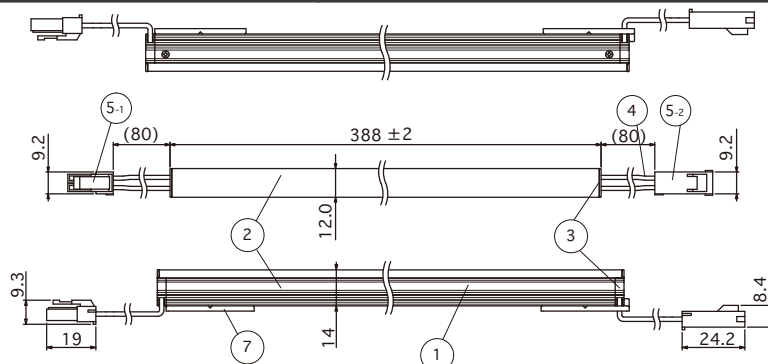


Installation Dimensions (Side View)

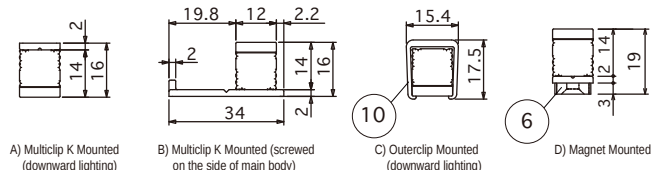


Option parts :

Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)


 Check the label on the DC + side for polarity.

Option parts :


Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Model number	L(mm)
CAD-1000-MCFC-I	1000 ± 15
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀

Accessories • Option parts :

Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

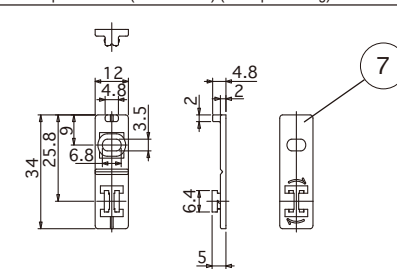


Option parts : Outerclip for silux (LSX-PT-A) (5pcs / 1bag)




Option parts :

Liftclip for silux (LSX-PTL) (2pcs / 1bag)

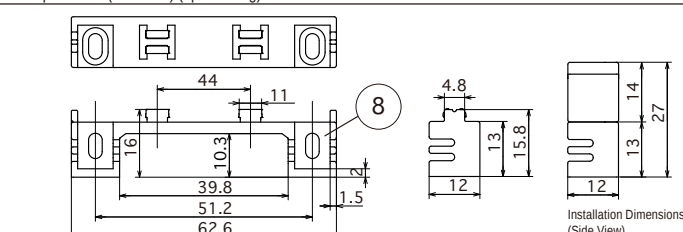

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

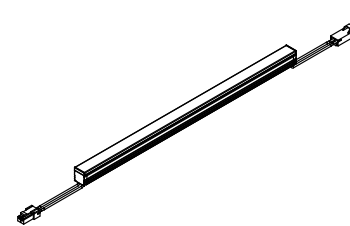	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 59g	Light Source color :	Item Number
Power consumption : 5.2W	Number of LEDs : 77		Natural white : N : 5000K (232 lm* / Ra 93)	LSXF-0388-N-DF-I-13 LSXF-0388-W-DF-I-13 LSXF-0388-WW-DF-I-13 LSXF-0388-L30-DF-I-13 LSXF-0388-L27-DF-I-13 LSXF-0388-L24-DF-I-13
Max. sets connectable : 6m			White : W : 4000K (232 lm* / Ra 94)	
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (222 lm* / Ra 94)	
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K : L30 : 3000K (217 lm* / Ra 93)	
Accessories : Multiclip K (3pcs / 1 bag)			Warm white 2700K : L27 : 2700K (208 lm* / Ra 93)	
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (193 lm* / Ra 94)	
Joint cable 1000mm,				
Multiclip K (3pcs / 1 bag)				
Liftclip (2pcs / 1 bag)				
Outerclip (5pcs / 1 bag)				
Magnet attachment				

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series


Luci silux K(13.3W/m)

Luci silux K(13.3W/m) 509



Luci

Luci Pte. Ltd.

2022.07.12

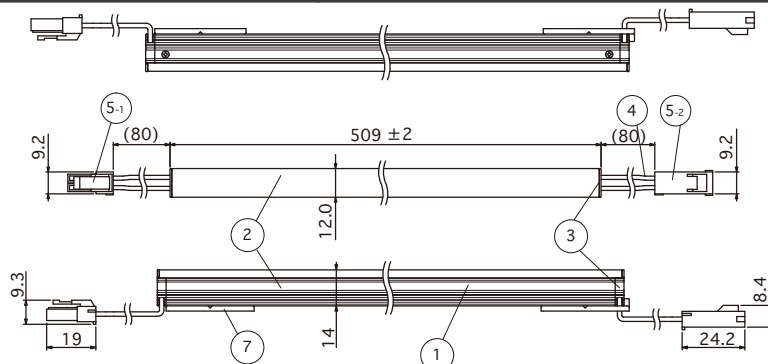


Installation Dimensions (Side View)

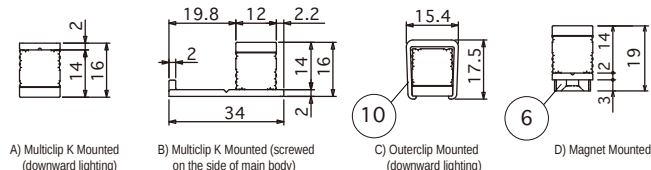


Option parts :

Power supply cable 3000mm for SL connector (CAD-3000-MCNN-I)


 Check the label on the DC + side for polarity.

Option parts :


Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Model number	L(mm)
CAD-1000-MCFC-I	1000 ^{±15}
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀

Accessories • Option parts :

Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

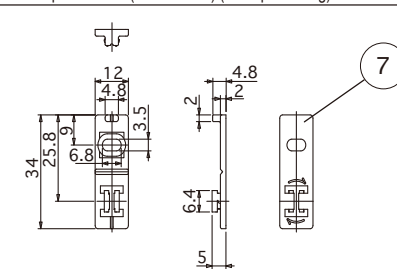


Option parts : Outerclip for silux (LSX-PT-A) (5pcs / 1bag)




Option parts :

Liftclip for silux (LSX-PTL) (2pcs / 1bag)

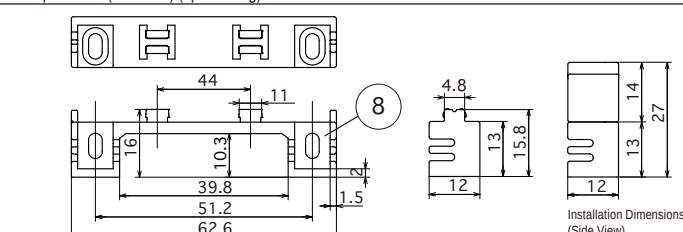

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

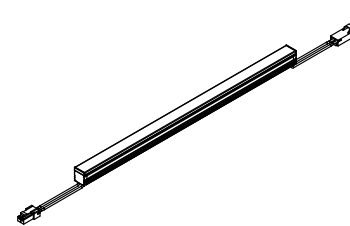	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 76g	Light Source color :	Item Number
	Power consumption : 6.6W	Number of LEDs : 98		LSXK-0509-N-DF-I-13 LSXK-0509-W-DF-I-13 LSXK-0509-WW-DF-I-13 LSXK-0509-L30-DF-I-13 LSXK-0509-L27-DF-I-13 LSXK-0509-L24-DF-I-13
	Max. sets connectable : 6m			
	Environment : Indoors (No Condensation)			
	Operating temperature : 0°C~+35°C (No Condensation)			
	Accessories : Multiclip K (3pcs / 1 bag)			
	Option parts : Power supply cable 3000mm,			
	Joint cable 1000mm,			
	Multiclip K (3pcs / 1 bag)			
	Liftclip (2pcs / 1 bag)			
	Outerclip (5pcs / 1 bag)			
	Magnet attachment			

Natural white	: N	: 5000K (310 lm * / Ra 93)
White	: W	: 4000K (310 lm * / Ra 94)
Warm white 3500K:	WW : 3500K	(297 lm * / Ra 94)
Warm white 3000K:	L30 : 3000K	(290 lm * / Ra 93)
Warm white 2700K:	L27 : 2700K	(277 lm / Ra 93)
Warm white 2400K:	L24 : 2400K	(257 lm * / Ra 94)
*=Equivalent		

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series


Luci silux K(13.3W/m)

Luci silux K(13.3W/m) 573



Luci

Luci Pte. Ltd.

2022.07.12

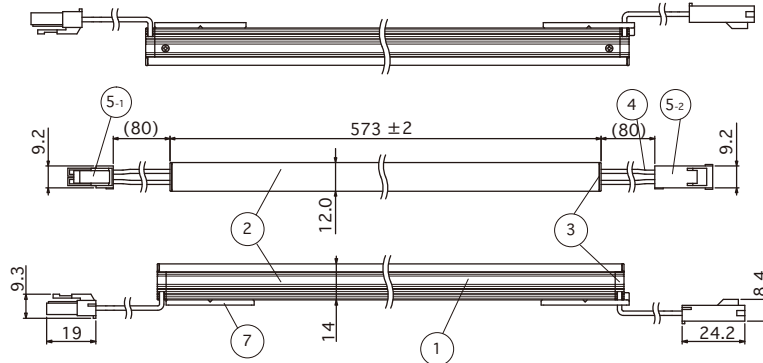


Installation Dimensions (Side View)

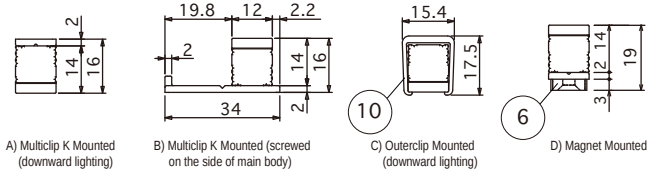


Option parts :

Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)


 Check the label on the DC + side for polarity.

Option parts :


Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Model number	L(mm)
CAD-1000-MCFC-I	1000 ± 15
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀

Accessories • Option parts :

Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

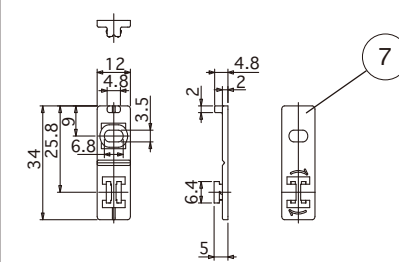


Option parts : Outerclip for silux (LSX-PT-A) (5pcs / 1bag)




Option parts :

Liftclip for silux (LSX-PTL) (2pcs / 1bag)

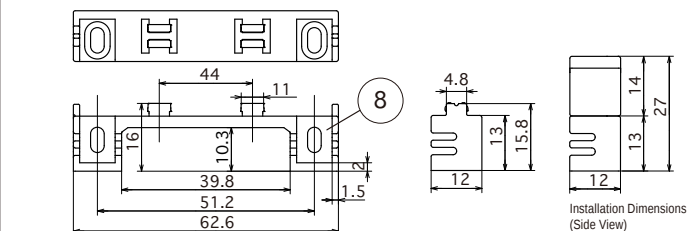

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

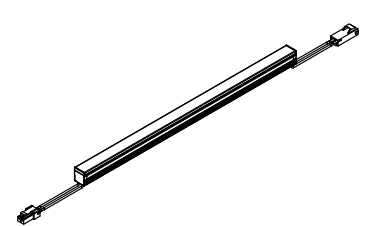	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 84g	Light Source color :	Item Number
Power consumption : 7.6W	Number of LEDs : 112		Natural white : N : 5000K (349 lm* / Ra 93)	LSXK-0573-N-DF-I-13 LSXK-0573-W-DF-I-13 LSXK-0573-WW-DF-I-13 LSXK-0573-L30-DF-I-13 LSXK-0573-L27-DF-I-13 LSXK-0573-L24-DF-I-13
Max. sets connectable : 6m			White : W : 4000K (349 lm* / Ra 94)	
Environment : Indoors (No Condensation)			Warm white 3500K: WW : 3500K (334 lm* / Ra 94)	
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K: L30 : 3000K (326 lm* / Ra 93)	
Accessories : Multiclip K (3pcs / 1 bag)			Warm white 2700K: L27 : 2700K (312 lm* / Ra 93)	
Option parts : Power supply cable 3000mm,			Warm white 2400K: L24 : 2400K (289 lm* / Ra 93)	
Joint cable 1000mm,				
Multiclip K (3pcs / 1 bag)				
Liftclip (2pcs / 1 bag)				
Outerclip (5pcs / 1 bag)				
Magnet attachment				

* = Equivalent

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series


Luci silux K(13.3W/m)

Luci silux K(13.3W/m) 702



Luci

Luci Pte. Ltd.

2022.07.12

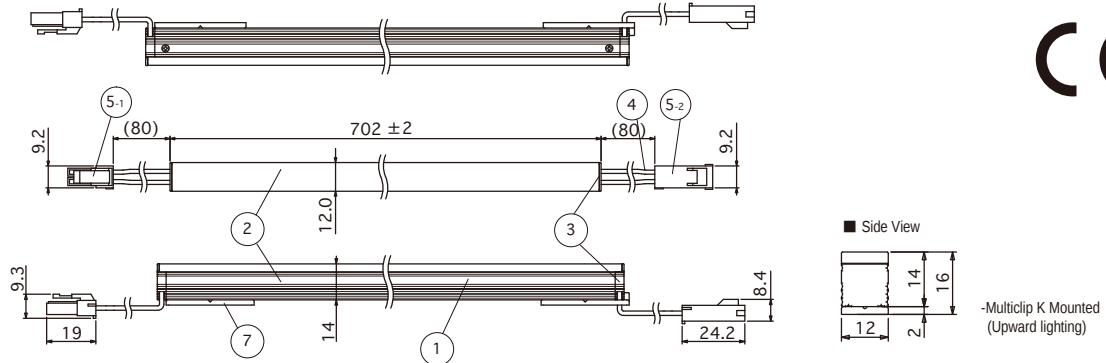


Installation Dimensions (Side View)

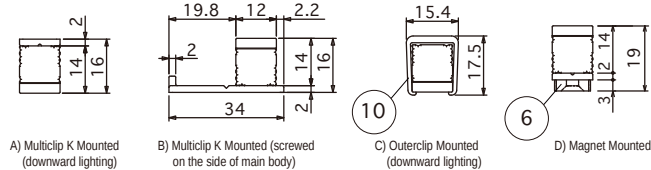


Option parts :

Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)

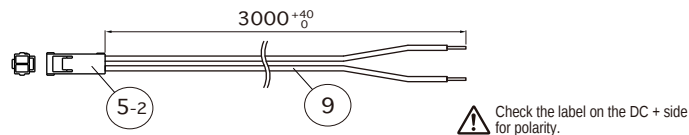


Option parts :

Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)

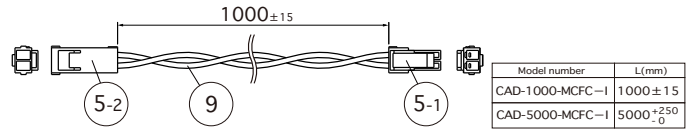


Accessories • Option parts :

Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

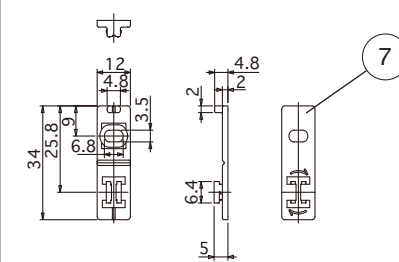


Option parts : Outerclip for silux (LSX-PT-A) (5pcs / 1bag)




Option parts :

Liftclip for silux (LSX-PTL) (2pcs / 1bag)

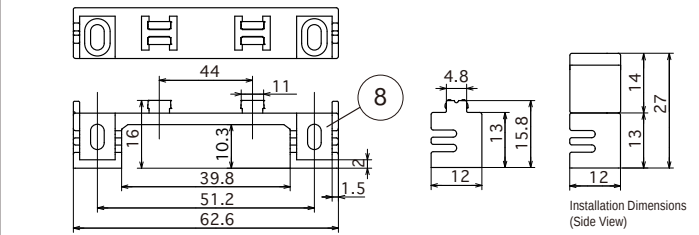

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

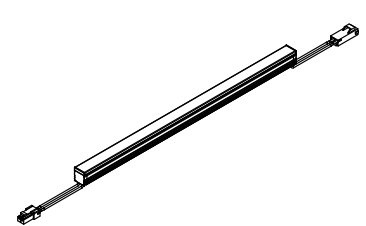	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black+, white-	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 110g	Light Source color :	Item Number
Power consumption : 9.5W	Number of LEDs : 140		Natural white : N : 5000K (426 lm* / Ra 93)	LSXK-0702-N-DF-I-13 LSXK-0702-W-DF-I-13 LSXK-0702-WW-DF-I-13 LSXK-0702-L30-DF-I-13 LSXK-0702-L27-DF-I-13 LSXK-0702-L24-DF-I-13
Max. sets connectable : 6m			White : W : 4000K (426 lm* / Ra 94)	
Environment : Indoors (No Condensation)			Warm white 3500K: WW : 3500K (408 lm* / Ra 94)	
Operating temperature : 0°C~+35°C (No Condensation)			Warm white 3000K: L30 : 3000K (399 lm* / Ra 93)	
Accessories : Multiclip K (3pcs / 1bag)			Warm white 2700K: L27 : 2700K (381 lm* / Ra 93)	
Option parts : Power supply cable 3000mm,			Warm white 2400K: L24 : 2400K (354 lm* / Ra 94)	
Joint cable 1000mm,				
Multiclip K (3pcs / 1bag)				
Liftclip (2pcs / 1bag)				
Outerclip (5pcs / 1bag)				
Magnet attachment				

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series


Luci silux K(13.3W/m)

Luci silux K(13.3W/m) 823



Luci

Luci Pte. Ltd.

2022.07.12

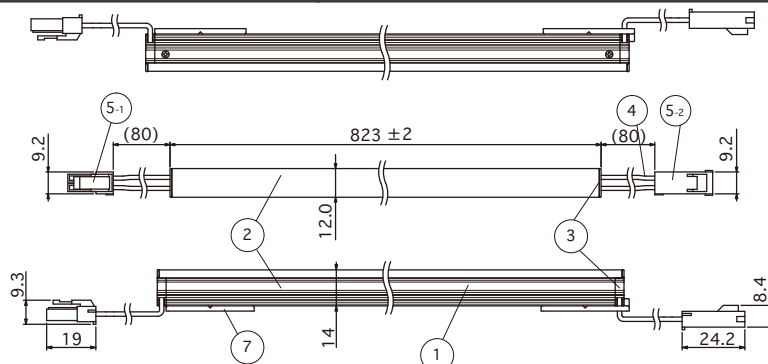


Installation Dimensions (Side View)

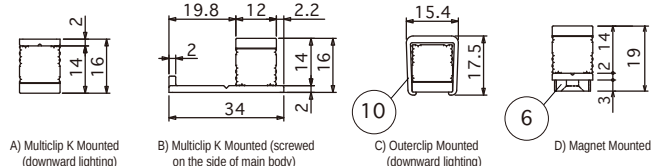


Option parts :

Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)


 Check the label on the DC + side for polarity.

Option parts :


Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Model number	L(mm)
CAD-1000-MCFC-I	1000 ± 15
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀

Accessories • Option parts :

Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

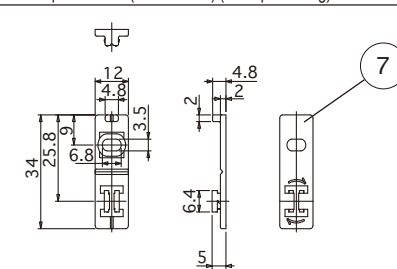


Option parts : Outerclip for silux (LSX-PT-A) (5pcs / 1bag)




Option parts :

Liftclip for silux (LSX-PTL) (2pcs / 1bag)

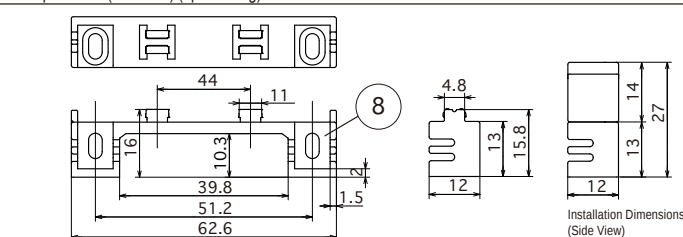

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

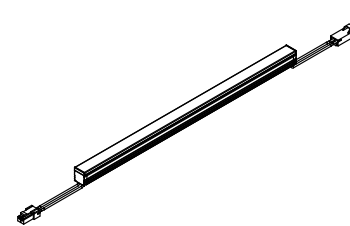	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 120g	Light Source color :	Item Number
Power consumption : 10.9W	Number of LEDs : 161		Natural white : N : 5000K (504 lm* / Ra 93)	LSXK-0823-N-DF-I-13 LSXK-0823-W-DF-I-13 LSXK-0823-WW-DF-I-13 LSXK-0823-L30-DF-I-13 LSXK-0823-L27-DF-I-13 LSXK-0823-L24-DF-I-13
Max. sets connectable : 6m			White : W : 4000K (504 lm* / Ra 94)	
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (482 lm* / Ra 94)	
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K : L30 : 3000K (472 lm* / Ra 93)	
Accessories : Multiclip K (5pcs / 1bag)			Warm white 2700K : L27 : 2700K (450 lm* / Ra 93)	
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (418 lm* / Ra 94)	
Joint cable 1000mm,				
Multiclip K (3pcs / 1bag)				
Liftclip (2pcs / 1bag)				
Outerclip (5pcs / 1bag)				
Magnet attachment				

* = Equivalent

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series


Luci silux K(13.3W/m)

Luci silux K(13.3W/m) 1008



Luci

Luci Pte. Ltd.

2022.07.12

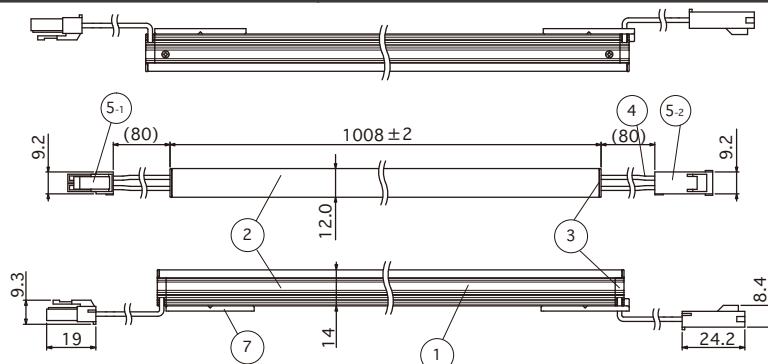


Installation Dimensions (Side View)

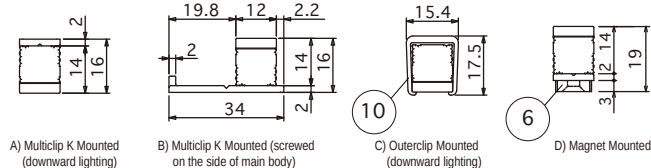


Option parts :

Power supply cable 3000mm for SL connector (CAD-3000-MCNN-I)


 Check the label on the DC + side for polarity.

Option parts :


Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Model number	L(mm)
CAD-1000-MCFC-I	1000 ± 15
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀

Accessories • Option parts :

Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

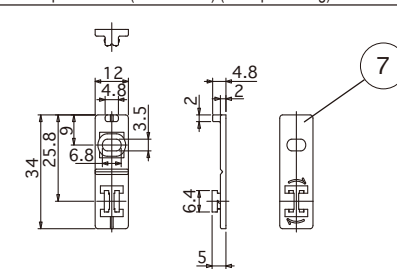


Option parts : Outerclip for silux (LSX-PT-A) (5pcs / 1bag)




Option parts :

Liftclip for silux (LSX-PTL) (2pcs / 1bag)

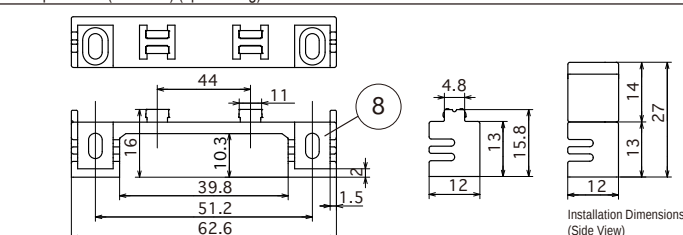

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

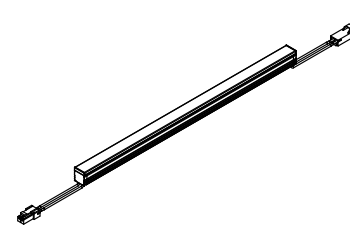	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 145g	Light Source color :	Item Number
Power consumption : 13.3W	Number of LEDs : 196		Natural white : N : 5000K (620 lm* / Ra 93)	LSXK-1008-N-DF-I-13 LSXK-1008-W-DF-I-13 LSXK-1008-WW-DF-I-13 LSXK-1008-L30-DF-I-13 LSXK-1008-L27-DF-I-13 LSXK-1008-L24-DF-I-13
Max. sets connectable : 6m			White : W : 4000K (620 lm* / Ra 94)	
Environment : Indoors (No Condensation)			Warm white 3500K: WW : 3500K (594 lm* / Ra 94)	
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K: L30 : 3000K (581 lm* / Ra 93)	
Accessories : Multiclip K (5pcs / 1bag)			Warm white 2700K: L27 : 2700K (554 lm* / Ra 93)	
Option parts : Power supply cable 3000mm,			Warm white 2400K: L24 : 2400K (515 lm* / Ra 94)	
Joint cable 1000mm,				
Multiclip K (3pcs / 1bag)				
Liftclip (2pcs / 1bag)				
Outerclip (5pcs / 1bag)				
Magnet attachment				

* = Equivalent

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series


Luci silux K(13.3W/m)

Luci silux K(13.3W/m) 1137



Luci

Luci Pte. Ltd.

2022.07.12

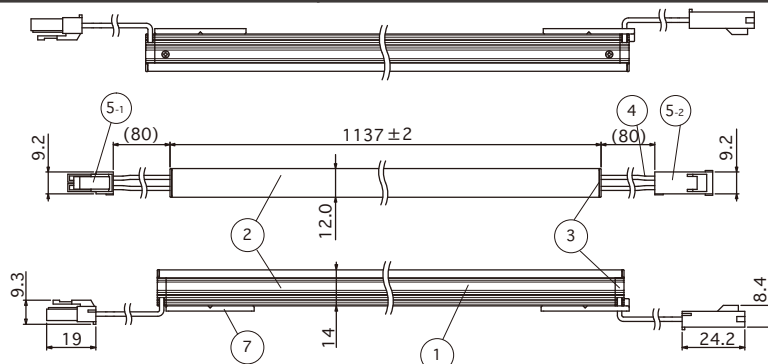


Installation Dimensions (Side View)

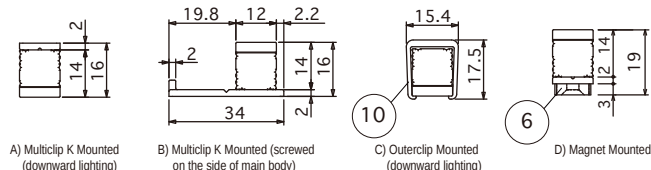


Option parts :

Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)


 Check the label on the DC + side for polarity.

Option parts :


Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Model number	L(mm)
CAD-1000-MCFC-I	1000 ± 15
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀

Accessories • Option parts :

Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

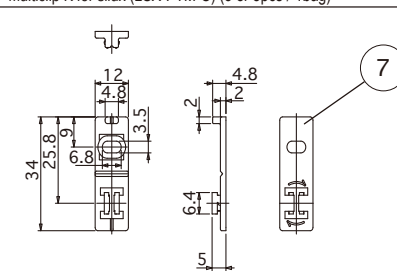


Option parts : Outerclip for silux (LSX-PT-A) (5pcs / 1bag)




Option parts :

Liftclip for silux (LSX-PTL) (2pcs / 1bag)

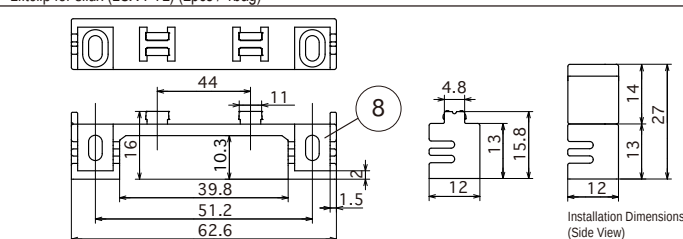

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

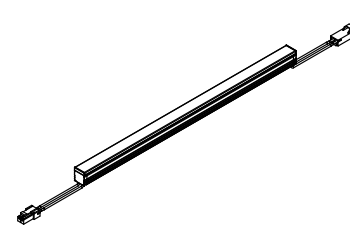	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 160g	Light Source color :	Item Number
Power consumption : 15.2W	Number of LEDs : 224		Natural white : N : 5000K (698 lm* / Ra 93)	LSXK-1137-N-DF-I-13 LSXK-1137-W-DF-I-13 LSXK-1137-WW-DF-I-13 LSXK-1137-L30-DF-I-13 LSXK-1137-L27-DF-I-13 LSXK-1137-L24-DF-I-13
Max. sets connectable : 6m			White : W : 4000K (698 lm* / Ra 94)	
Environment : Indoors (No Condensation)			Warm white 3500K: WW : 3500K (668 lm* / Ra 94)	
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K: L30 : 3000K (653 lm* / Ra 93)	
Accessories : Multiclip K (5pcs / 1bag)			Warm white 2700K: L27 : 2700K (624 lm* / Ra 93)	
Option parts : Power supply cable 3000mm,			Warm white 2400K: L24 : 2400K (579 lm* / Ra 94)	
Joint cable 1000mm,				
Multiclip K (3pcs / 1bag)				
Liftclip (2pcs / 1bag)				
Outerclip (5pcs / 1bag)				
Magnet attachment				

* = Equivalent

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series


Luci silux K(13.3W/m)

Luci silux K(13.3W/m) 1451



Luci

Luci Pte. Ltd.

2022.07.12

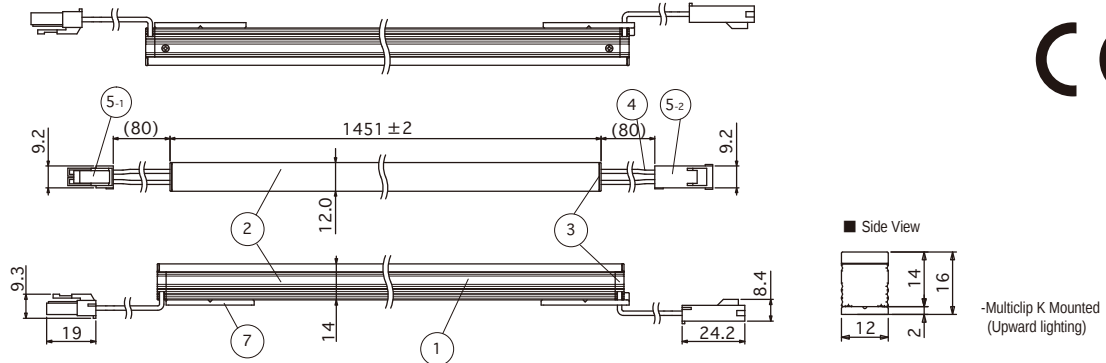



Installation Dimensions (Side View)

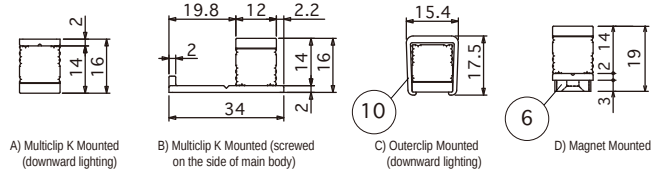


Option parts :

Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)


 Check the label on the DC + side for polarity.

Option parts :


Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)



Model number	L(mm)
CAD-1000-MCFC-I	1000 ± 1.5
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₋₀


Accessories • Option parts :

Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

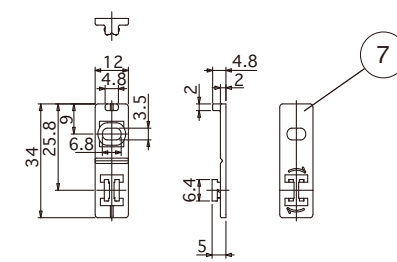


Option parts : Outerclip for silux

(LSX-PT-A) (5pcs / 1bag)




Option parts :

Liftclip for silux (LSX-PTL) (2pcs / 1bag)

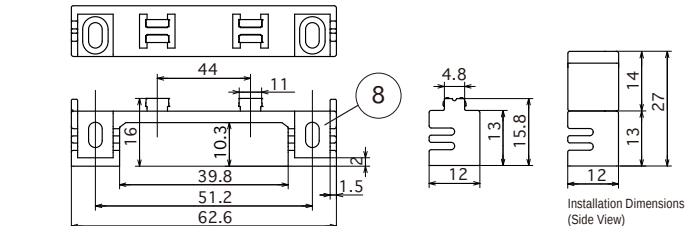

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

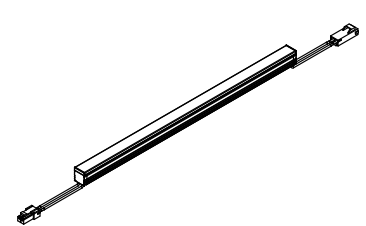	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 206g	Light Source color :	Item Number
Power consumption : 19.5W	Number of LEDs : 287		Natural white : N : 5000K (892 lm* / Ra 93)	LSXK-1451-N-DF-I-13 LSXK-1451-W-DF-I-13 LSXK-1451-WW-DF-I-13 LSXK-1451-L30-DF-I-13 LSXK-1451-L27-DF-I-13 LSXK-1451-L24-DF-I-13
Max. sets connectable : 6m			White : W : 4000K (892 lm* / Ra 94)	
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (854 lm* / Ra 94)	
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K : L30 : 3000K (835 lm* / Ra 93)	
Accessories : Multiclip K (5pcs / 1bag)			Warm white 2700K : L27 : 2700K (797 lm* / Ra 93)	
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (740 lm* / Ra 94)	
Joint cable 1000mm,				
Multiclip K (3pcs / 1bag)				
Liftclip (2pcs / 1bag)				
Outerclip (5pcs / 1bag)				
Magnet attachment				

* = Equivalent

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727