

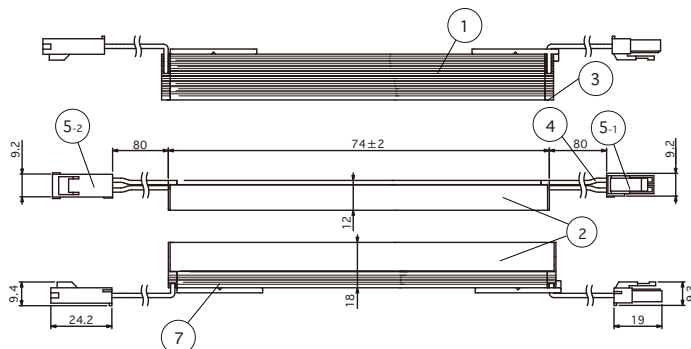
silux series

Luci silux wide K(4.3W/m)


Luci silux wide K(4.3W/m) 74

Luci Pte. Ltd.


2022.07.12



Side View

-Multiclip K Mounted
(downward lighting)

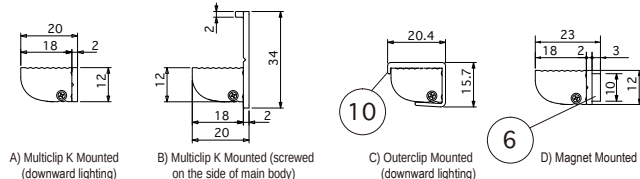
Installation Dimensions (Side View)

A) Multiclip K Mounted
(downward lighting)B) Multiclip K Mounted (screwed
on the side of main body)C) Outerclip Mounted
(downward lighting)

D) Magnet Mounted


Option parts :

Power supply cable 3000mm for SL connector (CAD-3000-MCNN-I)

Check the label on the DC + side
for polarity.

Option parts :



Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)



Model number	L(mm)
CAD-1000-MCFC-I	1000±15
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₋₀


Accessories • Option parts :

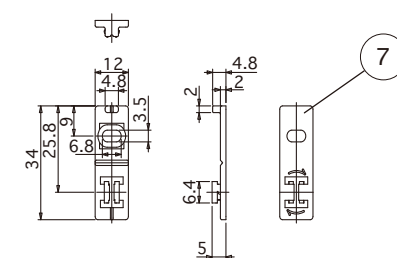Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

Option parts : Outerclip for silux wide
(LSXW-PT-A) (5pcs / 1bag)

Option parts :

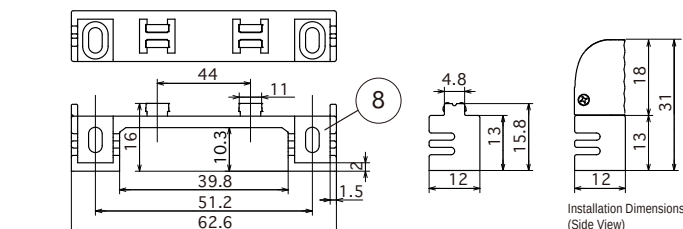Liftclip for silux (LSX-PTL) (2pcs / 1bag)

Installation Dimensions
(Side View)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Aluminum, alumite treatment	White	
2 Body Cover	Polycarbonate	Diffuser	
3 Side cover	Polycarbonate	Diffuser	
4 Lead wire		UL1007 AWG22, black +, white -	
5 Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6 Magnet	Neodymium magnet	Silver	
7 Mounting Clip	Polycarbonate	Clear	
8 Mounting Clip (Lift clip)	Polycarbonate	Clear	
9 Lead wire		UL1007 AWG20	
10 Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 17g	Light Source color :	Item Number
Power consumption : 0.3W	Number of LEDs : 14		Natural white : N : 5000K (19 lm* / Ra 93)	LSXWK-0074-N-DF-I-4
Max. sets connectable : 6m			White : W : 4000K (19 lm* / Ra 94)	LSXWK-0074-W-DF-I-4
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (19 lm* / Ra 94)	LSXWK-0074-WW-DF-I-4
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K : L30 : 3000K (18 lm* / Ra 93)	LSXWK-0074-L30-DF-I-4
Accessories : Multiclip K (3pcs / 1bag)			Warm white 2700K : L27 : 2700K (17 lm* / Ra 93)	LSXWK-0074-L27-DF-I-4
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (16 lm* / Ra 94)	LSXWK-0074-L24-DF-I-4
Joint cable 1000mm,			Warm white 2100K : L21 : 2100K (14 lm* / Ra 90)	LSXWK-0074-L21-DF-I-4
Multiclip K (3pcs / 1bag)				
Liftclip (2pcs / 1bag)				
Outerclip (5pcs / 1bag)				
Magnet attachment				

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

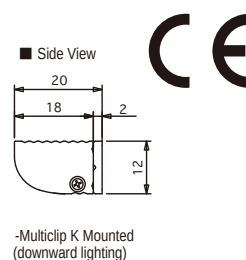
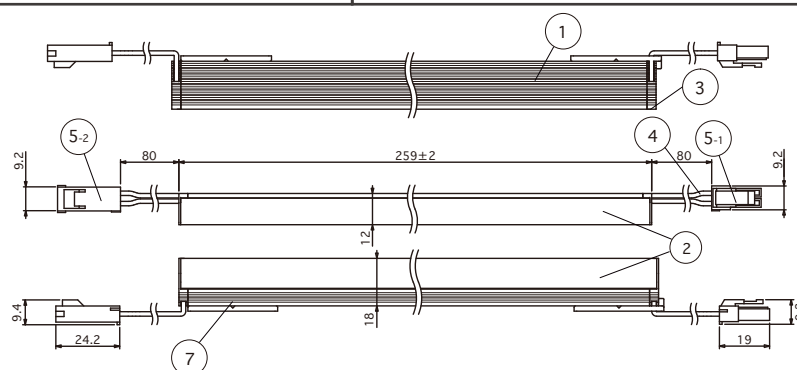
Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>


E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.


Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727




Installation Dimensions (Side View)

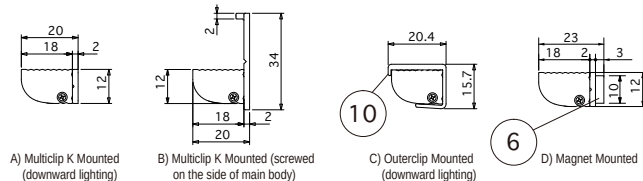

Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCNN-I)




Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Model number	L(mm)
CAD-1000-MCFC-I	1000±15
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀

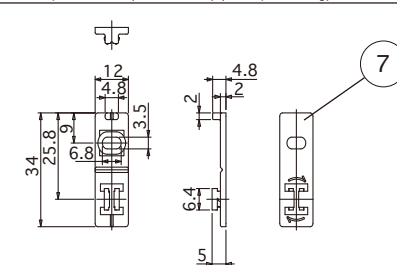
Accessories • Option parts :
Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)



Option parts : Outerclip for silux wide
(LSXW-PT-A) (5pcs / 1bag)



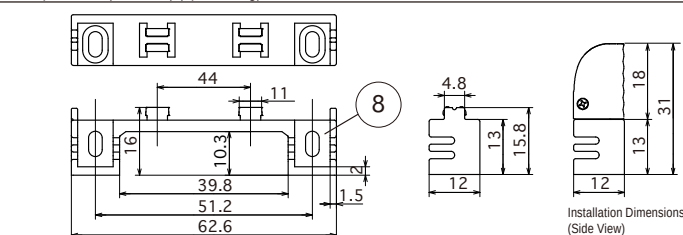Option parts :
Liftclip for silux (LSX-PTL) (2pcs / 1bag)



Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

Specification				Unit of Measure : mm
	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	White	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black+, white-	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 47g	Light Source color :	Item Number
Power consumption : 1W	Number of LEDs : 49		Natural white : N : 5000K (69 lm* / Ra 93)	LSXWK-0259-N-DF-I-4
Max. sets connectable : 6m			White : W : 4000K (69 lm* / Ra 94)	LSXWK-0259-W-DF-I-4
Environment : Indoors (No Condensation)			Warm white 3500K: WW : 3500K (66 lm* / Ra 94)	LSXWK-0259-WW-DF-I-4
Operating temperature : 0℃~+35℃ (No Condensation)			Warm white 3000K : L30 : 3000K (65 lm* / Ra 93)	LSXWK-0259-L30-DF-I-4
Accessories : Multiclip K (3pcs / 1bag)			Warm white 2700K : L27 : 2700K (62 lm / Ra 93)	LSXWK-0259-L27-DF-I-4
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (57 lm* / Ra 94)	LSXWK-0259-L24-DF-I-4
Joint cable 1000mm,			Warm white 2100K : L21 : 2100K (50 lm* / Ra 90)	LSXWK-0259-L21-DF-I-4
Multiclip K (3pcs / 1bag)				
Liftclip (2pcs / 1bag)			*=Equivalent	
Outerclip (5pcs / 1bag)				
Magnet attachment				

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ Tel: +65-6291-2410	Hong Kong Marketing Office Tel: +852-2219-8462 / Fax: +852-2219-8463
--	---

Korea Office
Tel: +82-2-508-2541

Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

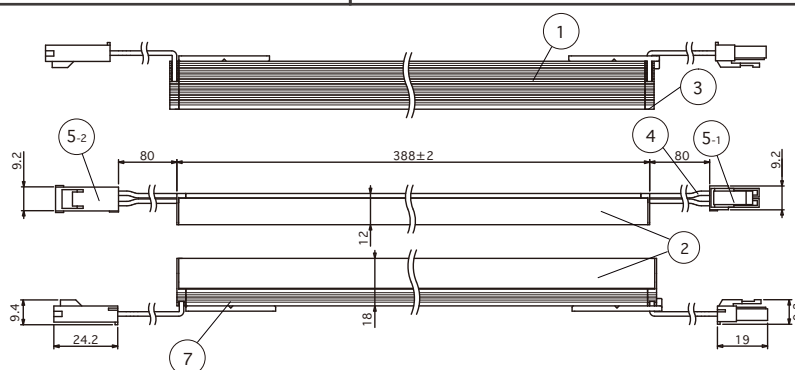
silux series

Luci silux wide K(4.3W/m)


Luci silux wide K(4.3W/m) 388

Luci Pte. Ltd.


2022.07.12



Side View

-Multiclip K Mounted
(downward lighting)

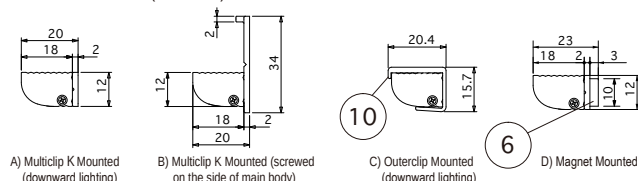Installation Dimensions (Side View)



Option parts :


Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)



⚠ Check the label on the DC + side for polarity.

Option parts :


Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Model number	L(mm)
CAD-1000-MCFC-I	1000±15
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₋₀

Accessories • Option parts :

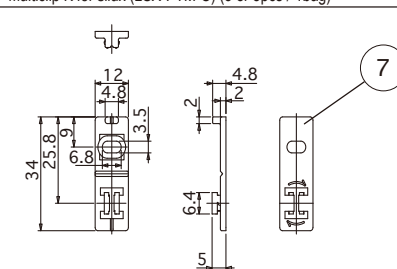Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)




Option parts : Outerclip for silux wide (LSXW-PT-A) (5pcs / 1bag)



Option parts :

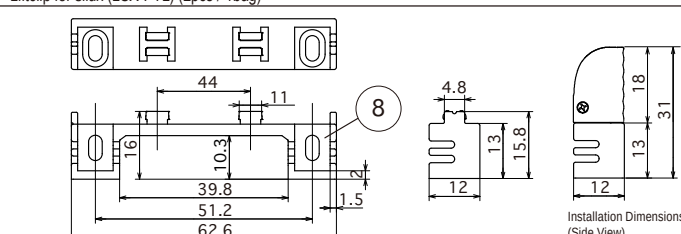Liftclip for silux (LSX-PTL) (2pcs / 1bag)

Installation Dimensions
(Side View)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Aluminum, alumite treatment	White	
2 Body Cover	Polycarbonate	Diffuser	
3 Side cover	Polycarbonate	Diffuser	
4 Lead wire		UL1007 AWG22, black +, white -	
5 Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6 Magnet	Neodymium magnet	Silver	
7 Mounting Clip	Polycarbonate	Clear	
8 Mounting Clip (Lift clip)	Polycarbonate	Clear	
9 Lead wire		UL1007 AWG20	
10 Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 69g	Light Source color :	Item Number
Power consumption : 1.6W	Number of LEDs : 77		Natural white : N : 5000K (109 lm* / Ra 93)	LSXWK-0388-N-DF-I-4
Max. sets connectable : 6m			White : W : 4000K (109 lm* / Ra 94)	LSXWK-0388-W-DF-I-4
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (104 lm* / Ra 94)	LSXWK-0388-WW-DF-I-4
Operating temperature : 0°C~+35°C (No Condensation)			Warm white 3000K : L30 : 3000K (102 lm* / Ra 93)	LSXWK-0388-L30-DF-I-4
Accessories : Multiclip K (3pcs / 1bag)			Warm white 2700K : L27 : 2700K (97 lm* / Ra 93)	LSXWK-0388-L27-DF-I-4
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (90 lm* / Ra 94)	LSXWK-0388-L24-DF-I-4
Joint cable 1000mm,			Warm white 2100K : L21 : 2100K (79 lm* / Ra 90)	LSXWK-0388-L21-DF-I-4
Multiclip K (3pcs / 1bag)				
Liftclip (2pcs / 1bag)				
Outerclip (5pcs / 1bag)				
Magnet attachment				

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series

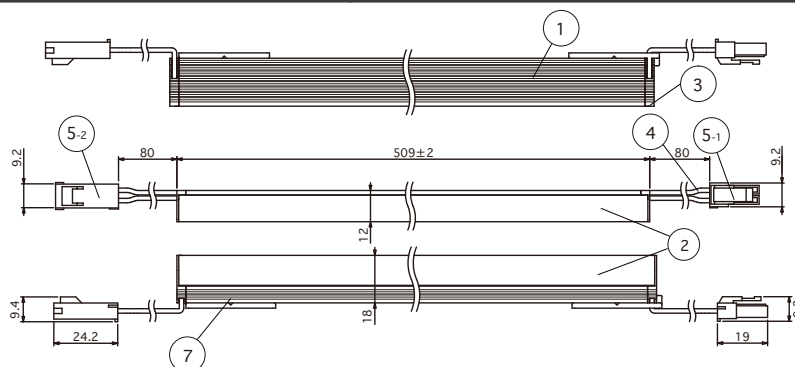
Luci silux wide K(4.3W/m)

Luci silux wide K(4.3W/m) 509




Luci Pte. Ltd.






2022.07.12




Side View

-Multiclip K Mounted
(downward lighting)

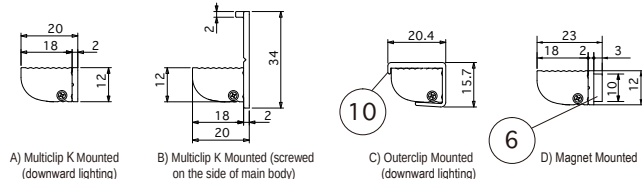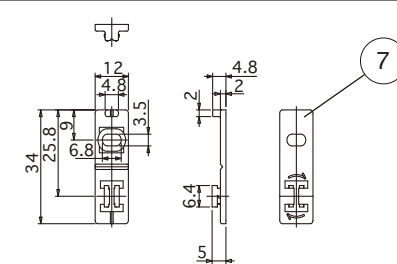Installation Dimensions (Side View)

Accessories • Option parts :
Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)Option parts : Outerclip for silux wide
(LSXW-PT-A) (5pcs / 1bag)Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCENN-I)⚠ Check the label on the DC + side
for polarity.Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)

Model number	L(mm)
CAD-1000-MCFC-I	1000±15
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₋₀

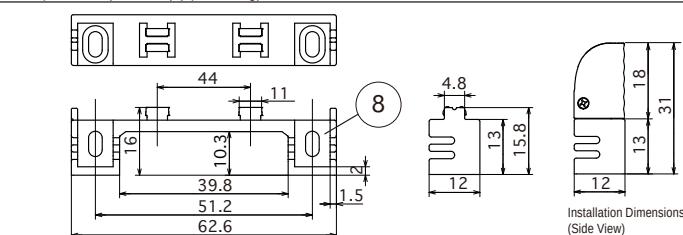Option parts :
Liftclip for silux (LSX-PTL) (2pcs / 1bag)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	White	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 90g	Light Source color :	Item Number
Power consumption : 2.1W	Number of LEDs : 98		Natural white : N : 5000K (139 lm* / Ra 93)	LSXWK-0509-N-DF-I-4 LSXWK-0509-W-DF-I-4 LSXWK-0509-WW-DF-I-4 LSXWK-0509-L30-DF-I-4 LSXWK-0509-L27-DF-I-4 LSXWK-0509-L24-DF-I-4 LSXWK-0509-L21-DF-I-4
Max. sets connectable : 6m			White : W : 4000K (139 lm* / Ra 94)	
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (133 lm* / Ra 94)	
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K : L30 : 3000K (130 lm* / Ra 93)	
Accessories : Multiclip K (3pcs / 1bag)			Warm white 2700K : L27 : 2700K (124 lm* / Ra 93)	
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (115 lm* / Ra 94)	
Joint cable 1000mm,			Warm white 2100K : L21 : 2100K (100 lm* / Ra 90)	
Multiclip K (3pcs / 1bag)				
Liftclip (2pcs / 1bag)				
Outerclip (5pcs / 1bag)				
Magnet attachment				

*=Equivalent

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series

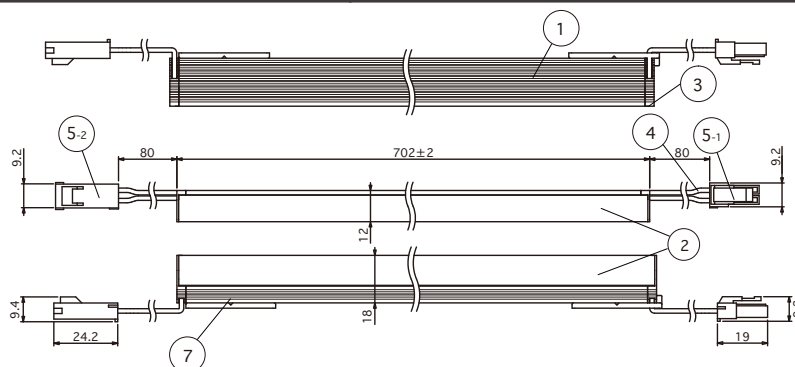
Luci silux wide K(4.3W/m)

Luci silux wide K(4.3W/m) 702




Luci Pte. Ltd.






2022.07.12




Side View

-Multiclip K Mounted
(downward lighting)

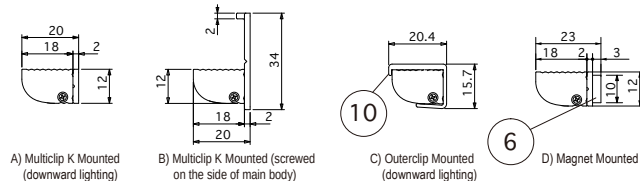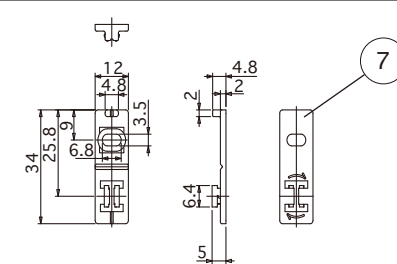Installation Dimensions (Side View)

Accessories • Option parts :
Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)Option parts : Outerclip for silux wide
(LSXW-PT-A) (5pcs / 1bag)Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)⚠ Check the label on the DC + side
for polarity.Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)

Model number	L(mm)
CAD-1000-MCFC-I	1000±15
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₋₀

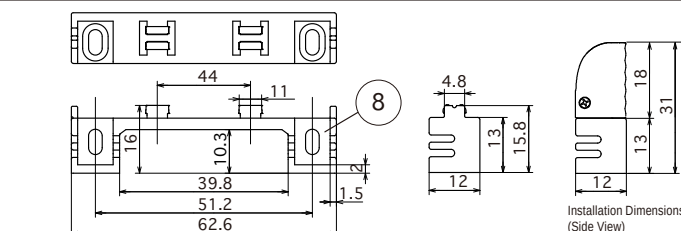Option parts :
Liftclip for silux (LSX-PTL) (2pcs / 1bag)Installation Dimensions
(Side View)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Aluminum, alumite treatment	White	
2 Body Cover	Polycarbonate	Diffuser	
3 Side cover	Polycarbonate	Diffuser	
4 Lead wire		UL1007 AWG22, black +, white -	
5 Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6 Magnet	Neodymium magnet	Silver	
7 Mounting Clip	Polycarbonate	Clear	
8 Mounting Clip (Lift clip)	Polycarbonate	Clear	
9 Lead wire		UL1007 AWG20	
10 Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V Weight : 120g	Light Source color :	Item Number
Power consumption : 3.0W Number of LEDs : 140		Natural white : N : 5000K (199 lm* / Ra 94)	LSXWK-0702-N-DF-I-4 LSXWK-0702-W-DF-I-4 LSXWK-0702-WW-DF-I-4 LSXWK-0702-L30-DF-I-4 LSXWK-0702-L27-DF-I-4 LSXWK-0702-L24-DF-I-4 LSXWK-0702-L21-DF-I-4
Max. sets connectable : 6m		White : W : 4000K (199 lm* / Ra 93)	
Environment : Indoors (No Condensation)		Warm white 3500K: WW : 3500K (190 lm* / Ra 93)	
Operating temperature : 0℃～+35℃ (No Condensation)		Warm white 3000K : L30 : 3000K (186 lm* / Ra 94)	
Accessories : Multiclip K (3pcs / 1bag)		Warm white 2700K : L27 : 2700K (178 lm/ Ra 94)	
Option parts : Power supply cable 3000mm,		Warm white 2400K : L24 : 2400K (165 lm* / Ra 93)	
Joint cable 1000mm,		Warm white 2100K : L21 : 2100K (144 lm* / Ra 90)	
Multiclip K (3pcs / 1bag)			
Liftclip (2pcs / 1bag)		*=Equivalent	
Outerclip (5pcs / 1bag)			
Magnet attachment			

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series

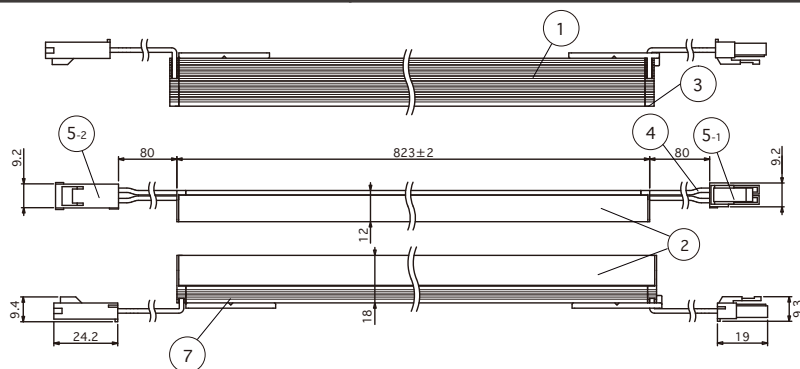
Luci silux wide K(4.3W/m)

Luci silux wide K(4.3W/m) 823




Luci Pte. Ltd.







2022.07.12



Side View

-Multiclip K Mounted
(downward lighting)

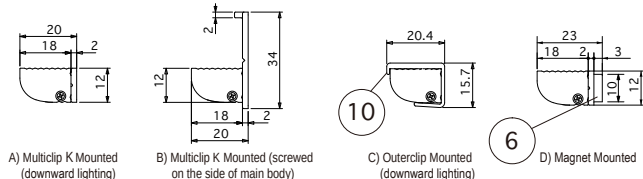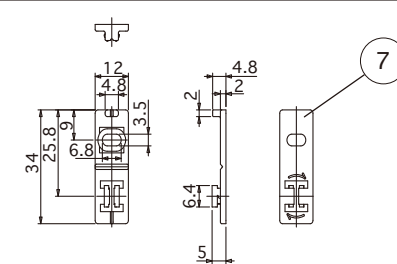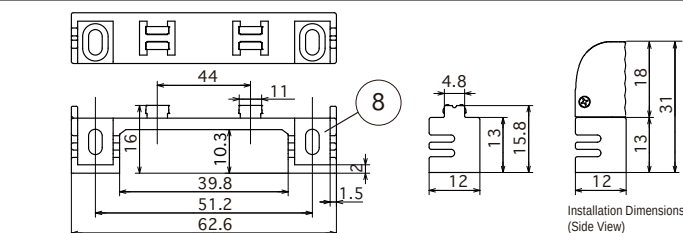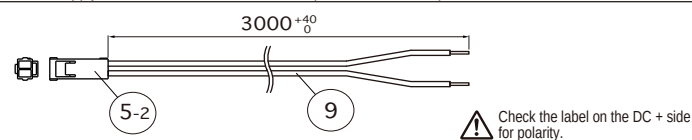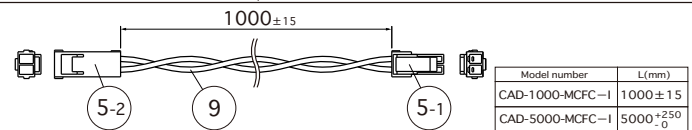Installation Dimensions (Side View)

Accessories • Option parts :
Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)Option parts : Outerclip for silux wide
(LSXW-PT-A) (5pcs / 1bag)Option parts :
Liftclip for silux (LSX-PTL) (2pcs / 1bag)Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Aluminum, alumite treatment	White	
2 Body Cover	Polycarbonate	Diffuser	
3 Side cover	Polycarbonate	Diffuser	
4 Lead wire		UL1007 AWG22, black +, white -	
5 Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6 Magnet	Neodymium magnet	Silver	
7 Mounting Clip	Polycarbonate	Clear	
8 Mounting Clip (Lift clip)	Polycarbonate	Clear	
9 Lead wire		UL1007 AWG20	
10 Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 140g	Light Source color :	Item Number
Power consumption : 3.5W	Number of LEDs : 161		Natural white : N : 5000K (229 lm* / Ra 94)	LSXWK-0823-N-DF-I-4 LSXWK-0823-W-DF-I-4 LSXWK-0823-WW-DF-I-4 LSXWK-0823-L30-DF-I-4 LSXWK-0823-L27-DF-I-4 LSXWK-0823-L24-DF-I-4 LSXWK-0823-L21-DF-I-4
Max. sets connectable : 6m			White : W : 4000K (229 lm* / Ra 93)	
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (219 lm* / Ra 93)	
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K : L30 : 3000K (214 lm* / Ra 94)	
Accessories : Multiclip K (5pcs / 1bag)			Warm white 2700K : L27 : 2700K (204 lm* / Ra 94)	
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (190 lm* / Ra 93)	
Joint cable 1000mm,			Warm white 2100K : L21 : 2100K (165 lm* / Ra 90)	
Multiclip K (3pcs / 1bag)				
Liftclip (2pcs / 1bag)				
Outerclip (5pcs / 1bag)				
Magnet attachment				

*=Equivalent

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series

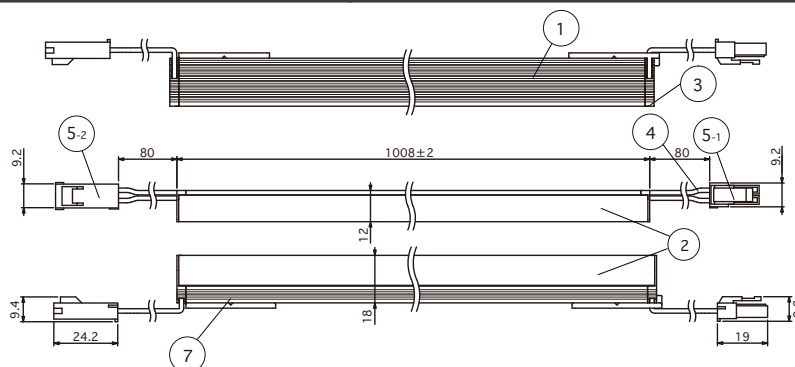
Luci silux wide K(4.3W/m)

Luci silux wide K(4.3W/m) 1008




Luci Pte. Ltd.







2022.07.12



Side View

-Multiclip K Mounted
(downward lighting)

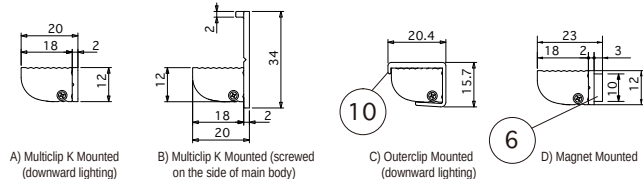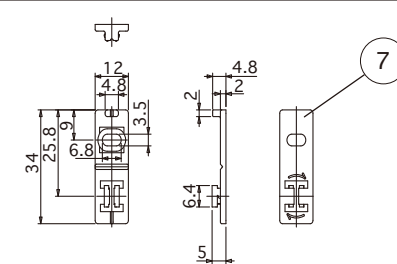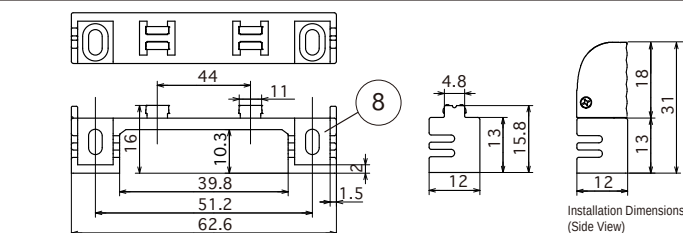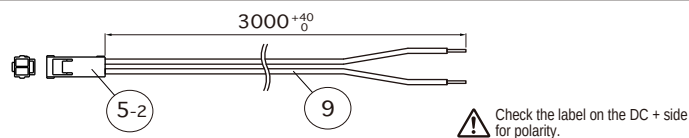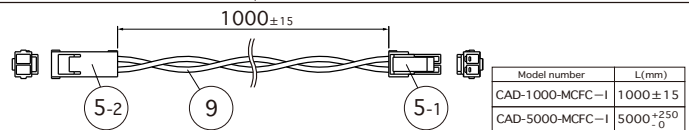Installation Dimensions (Side View)

Accessories • Option parts :
Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)Option parts : Outerclip for silux wide
(LSXW-PT-A) (5pcs / 1bag)Option parts :
Liftclip for silux (LSX-PTL) (2pcs / 1bag)Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Aluminum, alumite treatment	White	
2 Body Cover	Polycarbonate	Diffuser	
3 Side cover	Polycarbonate	Diffuser	
4 Lead wire		UL1007 AWG22, black +, white -	
5 Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6 Magnet	Neodymium magnet	Silver	
7 Mounting Clip	Polycarbonate	Clear	
8 Mounting Clip (Lift clip)	Polycarbonate	Clear	
9 Lead wire		UL1007 AWG20	
10 Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V Weight : 170g	Light Source color :	Item Number
Power consumption : 4.3W Number of LEDs : 196		Natural white : N : 5000K (279 lm * / Ra 93)	LSXWK-1008-N-DF-I-4 LSXWK-1008-W-DF-I-4 LSXWK-1008-WW-DF-I-4 LSXWK-1008-L30-DF-I-4 LSXWK-1008-L27-DF-I-4 LSXWK-1008-L24-DF-I-4 LSXWK-1008-L21-DF-I-4
Max. sets connectable : 6m		White : W : 4000K (279 lm * / Ra 94)	
Environment : Indoors (No Condensation)		Warm white 3500K: WW : 3500K (267 lm * / Ra 94)	
Operating temperature : 0℃～+35℃ (No Condensation)		Warm white 3000K : L30 : 3000K (261 lm* / Ra 93)	
Accessories : Multiclip K (5pcs / 1bag)		Warm white 2700K : L27 : 2700K (249 lm/ Ra 93)	
Option parts : Power supply cable 3000mm,		Warm white 2400K : L24 : 2400K (231 lm* / Ra 94)	
Joint cable 1000mm,		Warm white 2100K : L21 : 2100K (201 lm* / Ra 90)	
Multiclip K (3pcs / 1bag)			
Liftclip (2pcs / 1bag)		*=Equivalent	
Outerclip (5pcs / 1bag)			
Magnet attachment			

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series

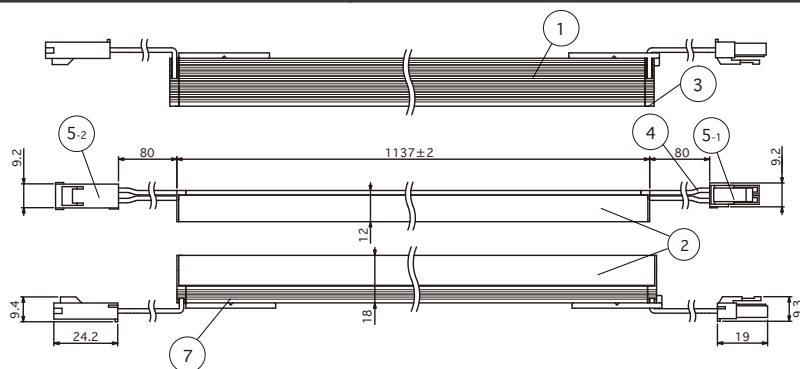
Luci silux wide K(4.3W/m)

Luci silux wide K(4.3W/m) 1137




Luci Pte. Ltd.


2022.07.12



Side View

-Multiclip K Mounted
(downward lighting)

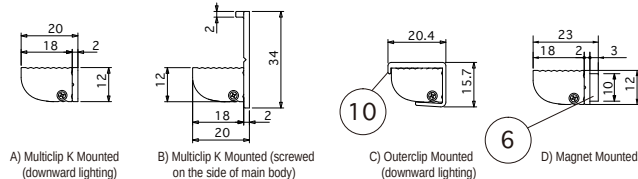
Installation Dimensions (Side View)

A) Multiclip K Mounted
(downward lighting)B) Multiclip K Mounted (screwed
on the side of main body)C) Outerclip Mounted
(downward lighting)

D) Magnet Mounted


Option parts :

Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)

⚠ Check the label on the DC + side
for polarity.

Option parts :



Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)



Model number	L(mm)
CAD-1000-MCFC-I	1000±15
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₋₀


Accessories • Option parts :

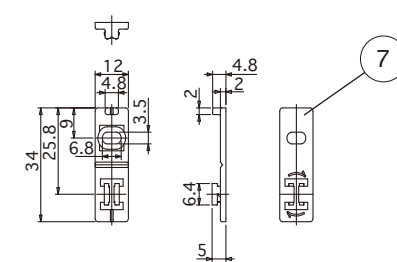Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

Option parts : Outerclip for silux wide
(LSXW-PT-A) (5pcs / 1bag)

Option parts :

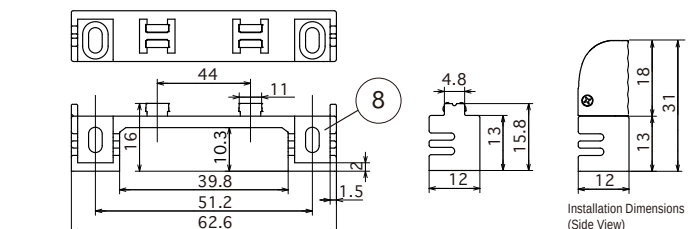Liftclip for silux (LSX-PTL) (2pcs / 1bag)

Installation Dimensions
(Side View)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	White	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 192g	Light Source color :	Item Number
Power consumption : 4.9W	Number of LEDs : 224		Natural white : N : 5000K (318 lm* / Ra 93)	LSXWK-1137-N-DF-I-4 LSXWK-1137-W-DF-I-4 LSXWK-1137-WW-DF-I-4 LSXWK-1137-L30-DF-I-4 LSXWK-1137-L27-DF-I-4 LSXWK-1137-L24-DF-I-4 LSXWK-1137-L21-DF-I-4
Max. sets connectable : 6m			White : W : 4000K (318 lm* / Ra 94)	
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (305 lm* / Ra 94)	
Operating temperature : 0°C~+35°C (No Condensation)			Warm white 3000K : L30 : 3000K (298 lm* / Ra 93)	
Accessories : Multiclip K (5pcs / 1bag)			Warm white 2700K : L27 : 2700K (284 lm* / Ra 93)	
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (264 lm* / Ra 94)	
Joint cable 1000mm,			Warm white 2100K : L21 : 2100K (230 lm* / Ra 90)	
Multiclip K (3pcs / 1bag)				
Liftclip (2pcs / 1bag)				
Outerclip (5pcs / 1bag)				
Magnet attachment				

*=Equivalent

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series

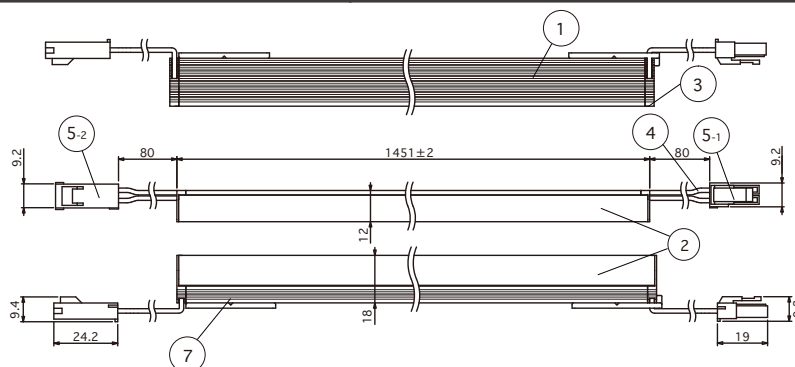
Luci silux wide K(4.3W/m)

Luci silux wide K(4.3W/m) 1451




Luci Pte. Ltd.






2022.07.12




Side View

-Multiclip K Mounted
(downward lighting)

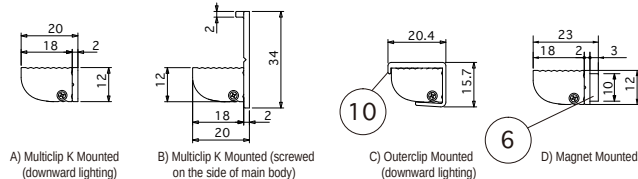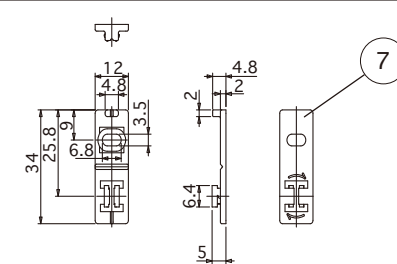Installation Dimensions (Side View)

Accessories • Option parts :
Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)Option parts : Outerclip for silux wide
(LSXW-PT-A) (5pcs / 1bag)Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCENN-I)⚠ Check the label on the DC + side
for polarity.Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)

Model number	L(mm)
CAD-1000-MCFC-I	1000 $\pm$ 15
CAD-5000-MCFC-I	5000 $\pm$ 250

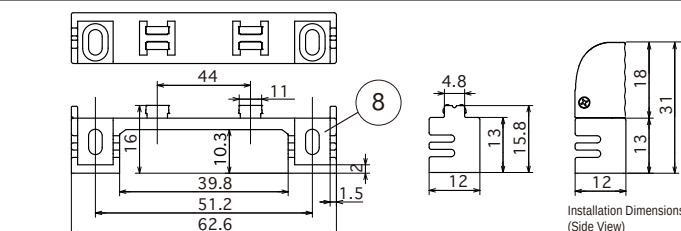Option parts :
Liftclip for silux (LSX-PTL) (2pcs / 1bag)Installation Dimensions
(Side View)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Aluminum, alumite treatment	White	
2 Body Cover	Polycarbonate	Diffuser	
3 Side cover	Polycarbonate	Diffuser	
4 Lead wire		UL1007 AWG22, black +, white -	
5 Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6 Magnet	Neodymium magnet	Silver	
7 Mounting Clip	Polycarbonate	Clear	
8 Mounting Clip (Lift clip)	Polycarbonate	Clear	
9 Lead wire		UL1007 AWG20	
10 Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V Weight : 240g	Light Source color :	Item Number
Power consumption : 6.3W Number of LEDs : 287		Natural white : N : 5000K (408 lm* / Ra 93)	LSXWK-1451-N-DF-I-4 LSXWK-1451-W-DF-I-4 LSXWK-1451-WW-DF-I-4 LSXWK-1451-L30-DF-I-4 LSXWK-1451-L27-DF-I-4 LSXWK-1451-L24-DF-I-4 LSXWK-1451-L21-DF-I-4
Max. sets connectable : 6m		White : W : 4000K (408 lm* / Ra 94)	
Environment : Indoors (No Condensation)		Warm white 3500K: WW : 3500K (391 lm* / Ra 94)	
Operating temperature : 0℃～+35℃ (No Condensation)		Warm white 3000K : L30 : 3000K (382 lm* / Ra 93)	
Accessories : Multiclip K (5pcs / 1bag)		Warm white 2700K : L27 : 2700K (365 lm / Ra 93)	
Option parts : Power supply cable 3000mm,		Warm white 2400K : L24 : 2400K (339 lm* / Ra 94)	
Joint cable 1000mm,		Warm white 2100K : L21 : 2100K (295 lm* / Ra 90)	
Multiclip K (3pcs / 1bag)			
Liftclip (2pcs / 1bag)		*=Equivalent	
Outerclip (5pcs / 1bag)			
Magnet attachment			

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series

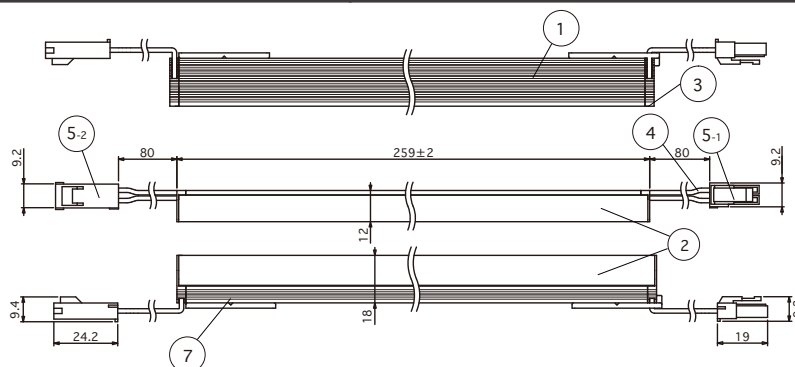
Luci silux wide K(8.1W/m)

Luci silux wide K(8.1W/m) 259




Luci Pte. Ltd.






2022.07.12




Side View

-Multiclip K Mounted
(downward lighting)

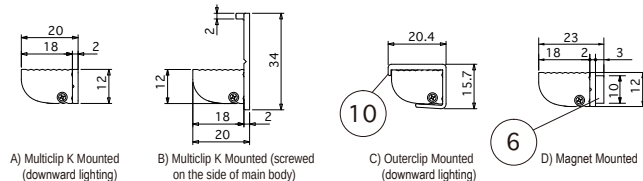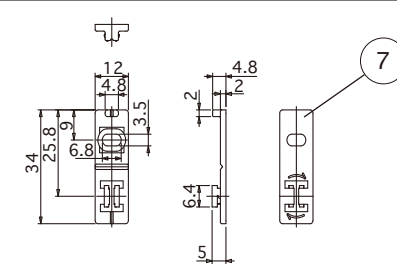Installation Dimensions (Side View)

Accessories • Option parts :
Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)Option parts : Outerclip for silux wide
(LSXW-PT-A) (5pcs / 1bag)Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)⚠ Check the label on the DC + side
for polarity.Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)


Model number	L(mm)
CAD-1000-MCFC-I	1000±15
CAD-5000-MCFC-I	5000±250 0

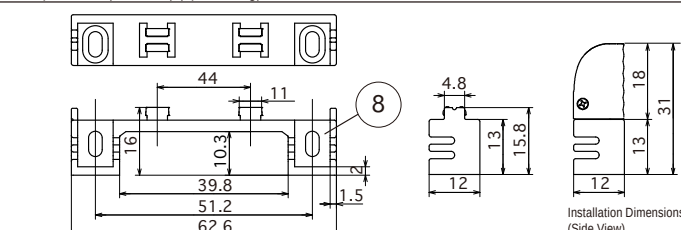Option parts :
Liftclip for silux (LSX-PTL) (2pcs / 1bag)Installation Dimensions
(Side View)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

Part Name	Material	Note
1 Body	Aluminum, alumite treatment	White
2 Body Cover	Polycarbonate	Diffuser
3 Side cover	Polycarbonate	Diffuser
4 Lead wire		UL1007 AWG22, black +, white -
5 Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White
6 Magnet	Neodymium magnet	Silver
7 Mounting Clip	Polycarbonate	Clear
8 Mounting Clip (Lift clip)	Polycarbonate	Clear
9 Lead wire		UL1007 AWG20
10 Mounting Clip (Outer clip)	Polycarbonate	Clear

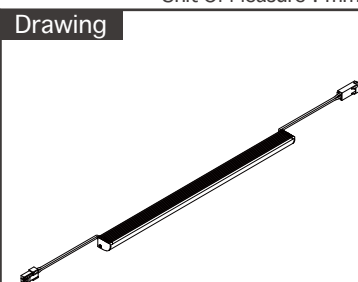

Spec	Input voltage : DC24V	Weight : 47g
	Power consumption : 2.0W	Number of LEDs : 49
	Max. sets connectable : 6m	
	Environment : Indoors (No Condensation)	
	Operating temperature : 0°C~+35°C (No Condensation)	
	Accessories : Multiclip K (3pcs / 1bag)	
	Option parts : Power supply cable 3000mm,	
	Joint cable 1000mm,	
	Multiclip K (3pcs / 1bag)	
	Liftclip (2pcs / 1bag)	
	Outerclip (5pcs / 1bag)	
	Magnet attachment	

Light Source color :

Natural white	: N	: 5000K (147 lm* / Ra 93)
White	: W	: 4000K (147 lm* / Ra 94)
Warm white 3500K	: WW	: 3500K (141 lm* / Ra 94)
Warm white 3000K	: L30	: 3000K (137 lm* / Ra 93)
Warm white 2700K	: L27	: 2700K (131 lm* / Ra 93)
Warm white 2400K	: L24	: 2400K (122 lm* / Ra 94)
Warm white 2100K	: L21	: 2100K (106 lm* / Ra 90)

*=Equivalent

Item Number

LSXWK-0259-N-DF-I-8
 LSXWK-0259-W-DF-I-8
 LSXWK-0259-WW-DF-I-8
 LSXWK-0259-L30-DF-I-8
 LSXWK-0259-L27-DF-I-8
 LSXWK-0259-L24-DF-I-8
 LSXWK-0259-L24-DF-I-8

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

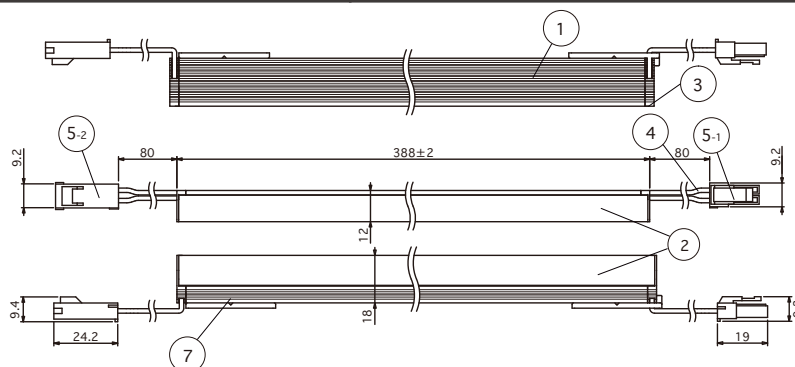
silux series

Luci silux wide K(8.1W/m)


Luci silux wide K(8.1W/m) 388

Luci Pte. Ltd.






2022.07.11




Side View

-Multiclip K Mounted
(downward lighting)

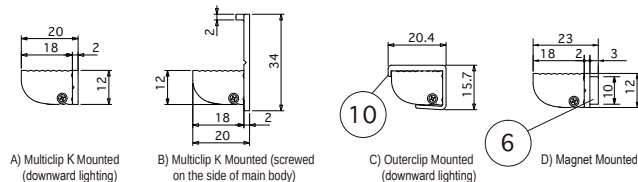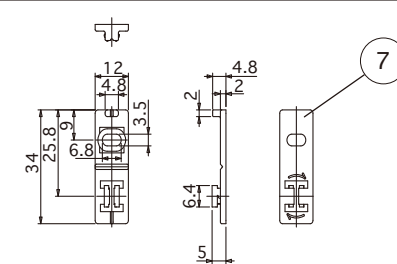Installation Dimensions (Side View)

Accessories • Option parts :
Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)Option parts : Outerclip for silux wide
(LSXW-PT-A) (5pcs / 1bag)Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCENN-I)⚠ Check the label on the DC + side
for polarity.Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)

Model number	L(mm)
CAD-1000-MCFC-I	1000±15
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₋₀

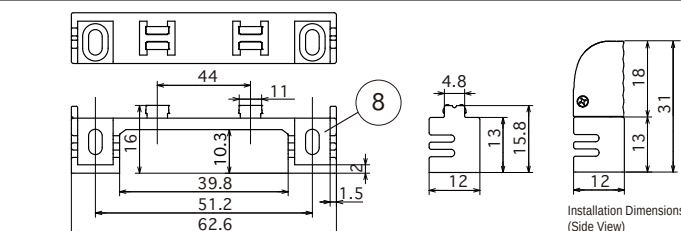Option parts :
Liftclip for silux (LSX-PTL) (2pcs / 1bag)Installation Dimensions
(Side View)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	White	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 69g	Light Source color :	Item Number
Power consumption : 3.1W	Number of LEDs : 77		Natural white : N : 5000K (231 lm* / Ra 93)	LSXWK-0388-N-DF-I-8 LSXWK-0388-W-DF-I-8 LSXWK-0388-WW-DF-I-8 LSXWK-0388-L30-DF-I-8 LSXWK-0388-L27-DF-I-8 LSXWK-0388-L24-DF-I-8 LSXWK-0388-L21-DF-I-8
Max. sets connectable : 6m			White : W : 4000K (231 lm* / Ra 94)	
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (221 lm* / Ra 94)	
Operating temperature : 0°C~+35°C (No Condensation)			Warm white 3000K : L30 : 3000K (216 lm* / Ra 93)	
Accessories : Multiclip K (3pcs / 1bag)			Warm white 2700K : L27 : 2700K (206 lm* / Ra 93)	
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (192 lm* / Ra 94)	
Joint cable 1000mm,			Warm white 2400K : L21 : 2100K (167 lm* / Ra 90)	
Multiclip K (3pcs / 1bag)				
Liftclip (2pcs / 1bag)				
Outerclip (5pcs / 1bag)				
Magnet attachment				

*=Equivalent

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

Luci Pte. Ltd.		http://www.luci.co.jp/	E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ Tel: +65-6291-2410	Hong Kong Marketing Office Tel: +852-2219-8462 / Fax: +852-2219-8461	Korea Office Tel: +82-2-508-2541	Shanghai China mainland Regional HQ Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727	

silux series

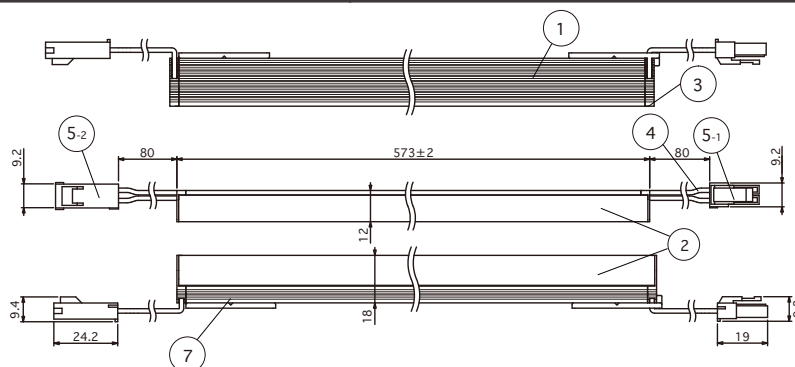
Luci silux wide K(8.1W/m)

Luci silux wide K(8.1W/m) 573




Luci Pte. Ltd.






2022.07.12




Side View

-Multiclip K Mounted
(downward lighting)

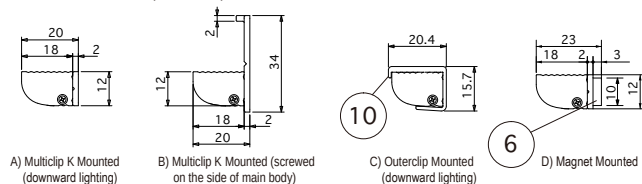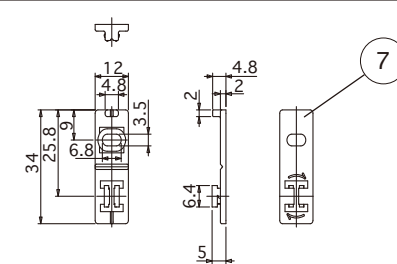Installation Dimensions (Side View)

Accessories • Option parts :
Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)Option parts : Outerclip for silux wide
(LSXW-PT-A) (5pcs / 1bag)Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCENN-I)⚠ Check the label on the DC + side
for polarity.Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)

Model number	L(mm)
CAD-1000-MCFC-I	1000±15
CAD-5000-MCFC-I	5000±250 -0

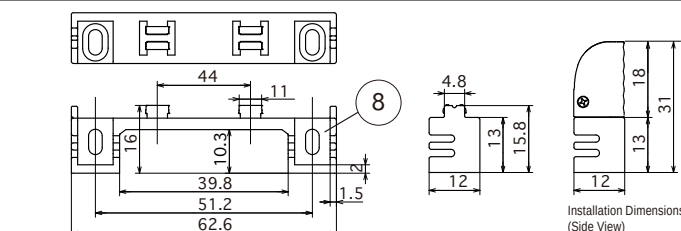Option parts :
Liftclip for silux (LSX-PTL) (2pcs / 1bag)Installation Dimensions
(Side View)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Aluminum, alumite treatment	White	
2 Body Cover	Polycarbonate	Diffuser	
3 Side cover	Polycarbonate	Diffuser	
4 Lead wire		UL1007 AWG22, black +, white -	
5 Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6 Magnet	Neodymium magnet	Silver	
7 Mounting Clip	Polycarbonate	Clear	
8 Mounting Clip (Lift clip)	Polycarbonate	Clear	
9 Lead wire		UL1007 AWG20	
10 Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Item Number
Input voltage : DC24V Weight : 100g	LSXWK-0573-N-DF-I-8 LSXWK-0573-W-DF-I-8 LSXWK-0573-WW-DF-I-8 LSXWK-0573-L30-DF-I-8 LSXWK-0573-L27-DF-I-8 LSXWK-0573-L24-DF-I-8 LSXWK-0573-L21-DF-I-8
Power consumption : 4.6W Number of LEDs : 112	
Max. sets connectable : 6m	
Environment : Indoors (No Condensation)	
Operating temperature : 0°C~+35°C (No Condensation)	
Accessories : Multiclip K (3pcs / 1bag)	
Option parts : Power supply cable 3000mm,	
Joint cable 1000mm,	
Multiclip K (3pcs / 1bag)	
Liftclip (2pcs / 1bag)	
Outerclip (5pcs / 1bag)	
Magnet attachment	



Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>


E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

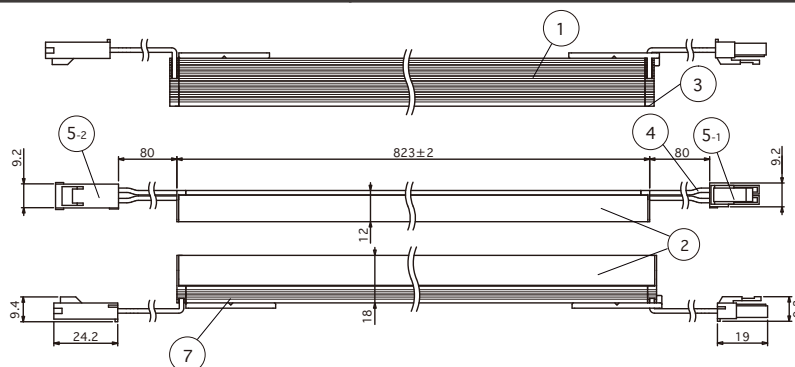
Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727




Installation Dimensions (Side View)

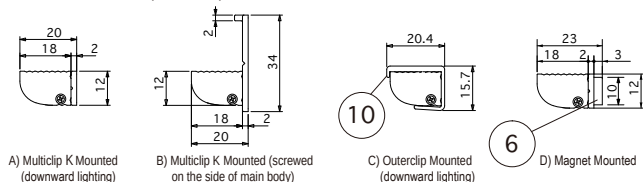

Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCNN-I)




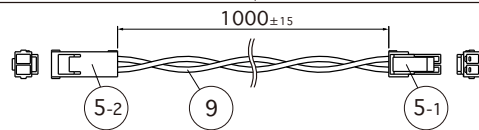Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Model number	L(mm)
CAD-1000-MCFC-I	1000±15
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₋₀

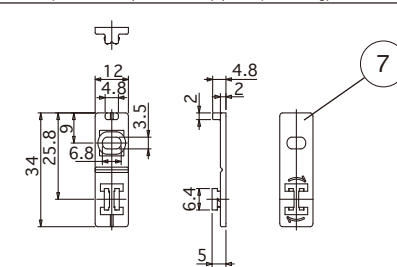
Accessories • Option parts :
Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)



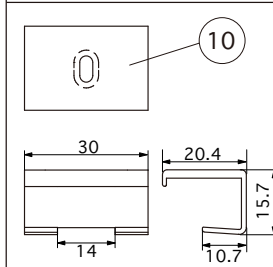Option parts : Outerclip for silux wide
(LSXW-PT-A) (5pcs / 1bag)



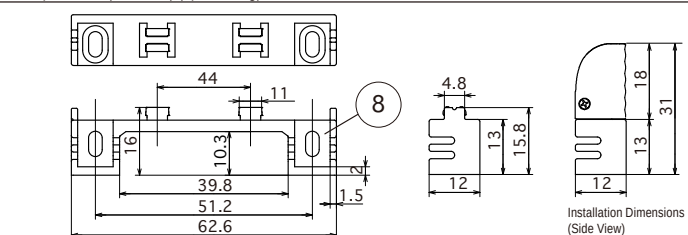Option parts :
Liftclip for silux (LSX-PTL) (2pcs / 1bag)



Spec · Rating may be subject to change without announcements

Unit Of Measure : mm

Part Name		Material	Note	Drawing 
1	Body	Aluminum, alumite treatment	White	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white –	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V Weight : 140g	Light Source color :	Item Number
Power consumption : 6.6W	Number of LEDs : 161	Natural white : N : 5000K (483 lm* / Ra 94)	LSXWK-0823-N-DF-I-8 LSXWK-0823-W-DF-I-8 LSXWK-0823-WW-DF-I-8 LSXWK-0823-L30-DF-I-8 LSXWK-0823-L27-DF-I-8 LSXWK-0823-L24-DF-I-8 LSXWK-0823-L21-DF-I-8
Max. sets connectable : 6m		White : W : 4000K (483 lm* / Ra 93)	
Environment : Indoors (No Condensation)		Warm white 3500K: WW : 3500K (463 lm* / Ra 93)	
Operating temperature : 0℃~+35℃ (No Condensation)		Warm white 3000K : L30 : 3000K (453 lm* / Ra 94)	
Accessories : Multiclip K (5pcs / 1bag)		Warm white 2700K : L27 : 2700K (432 lm/ Ra 94)	
Option parts : Power supply cable 3000mm,		Warm white 2400K : L24 : 2400K (401 lm* / Ra 93)	
Joint cable 1000mm,		Warm white 2100K : L21 : 2100K (350 lm* / Ra 90)	
Multiclip K (3pcs / 1bag)			
Liftclip (2pcs / 1bag)		*=Equivalent	
Outerclip (5pcs / 1bag)			
Magnet attachment			

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ Tel: +65-6291-2410	Hong Kong Marketing Office Tel: +852-2219-8462 / Fax: +852-2219-8463
--	---

Korea Office
Tel: +82-2-508-2541

Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series

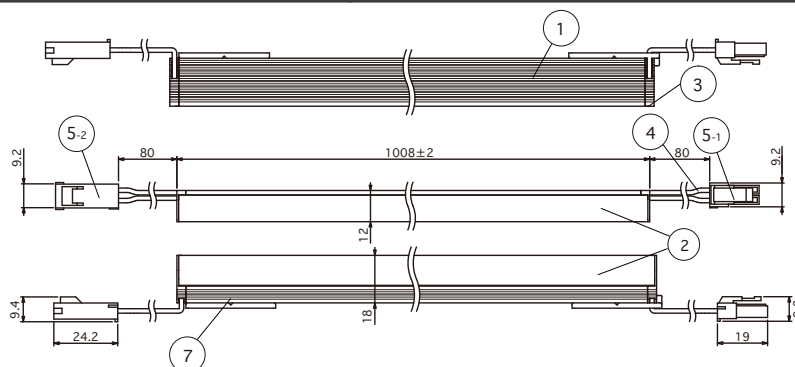
Luci silux wide K(8.1W/m)

Luci silux wide K(8.1W/m) 1008




Luci Pte. Ltd.






2022.07.12




Side View

-Multiclip K Mounted
(downward lighting)

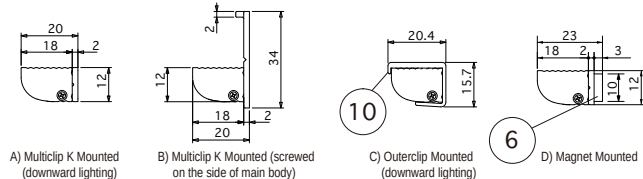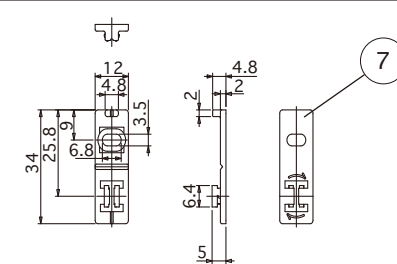Installation Dimensions (Side View)

Accessories • Option parts :
Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)Option parts : Outerclip for silux wide
(LSXW-PT-A) (5pcs / 1bag)Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)⚠ Check the label on the DC + side
for polarity.Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)

Model number	L(mm)
CAD-1000-MCFC-I	1000±15
CAD-5000-MCFC-I	5000±250 0

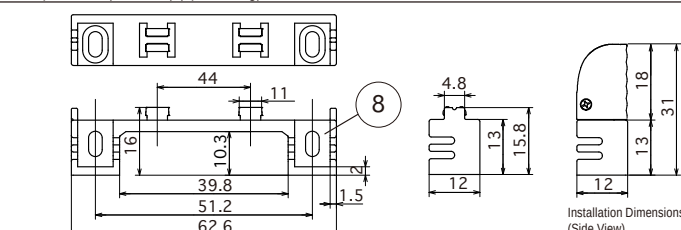Option parts :
Liftclip for silux (LSX-PTL) (2pcs / 1bag)Installation Dimensions
(Side View)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	White	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 170g	Light Source color :	Item Number
Power consumption : 8.1W	Number of LEDs : 196		Natural white : N : 5000K (589 lm* / Ra 93)	LSXWK-1008-N-DF-I-8
Max. sets connectable : 6m			White : W : 4000K (589 lm* / Ra 94)	LSXWK-1008-W-DF-I-8
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (564 lm* / Ra 94)	LSXWK-1008-WW-DF-I-8
Operating temperature : 0°C~+35°C (No Condensation)			Warm white 3000K : L30 : 3000K (551 lm* / Ra 93)	LSXWK-1008-L30-DF-I-8
Accessories : Multiclip K (5pcs / 1bag)			Warm white 2700K : L27 : 2700K (526 lm* / Ra 93)	LSXWK-1008-L27-DF-I-8
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (488 lm* / Ra 94)	LSXWK-1008-L24-DF-I-8
Joint cable 1000mm,			Warm white 2100K : L21 : 2100K (426 lm* / Ra 90)	LSXWK-1008-L21-DF-I-8
Multiclip K (3pcs / 1bag)				
Liftclip (2pcs / 1bag)				
Outerclip (5pcs / 1bag)				
Magnet attachment				

*=Equivalent

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series

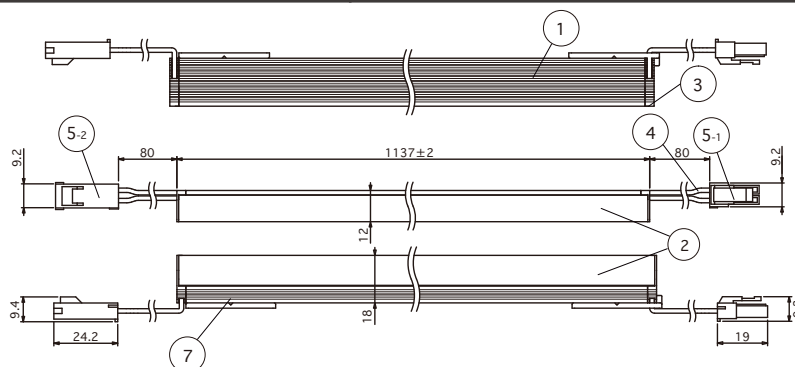
Luci silux wide K(8.1W/m)

Luci silux wide K(8.1W/m) 1137




Luci Pte. Ltd.







2022.07.12



Side View

-Multiclip K Mounted
(downward lighting)

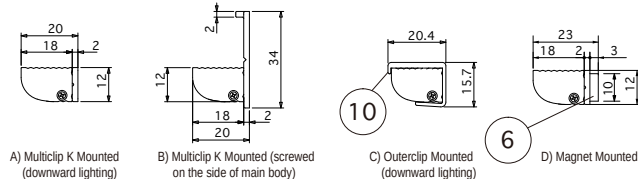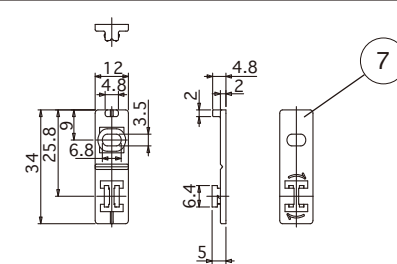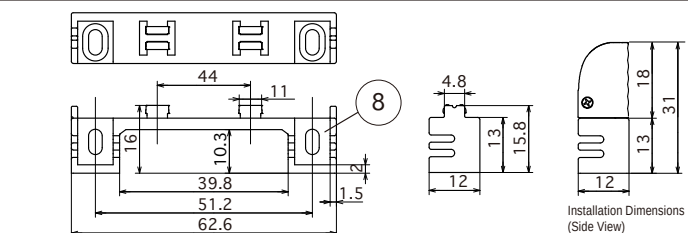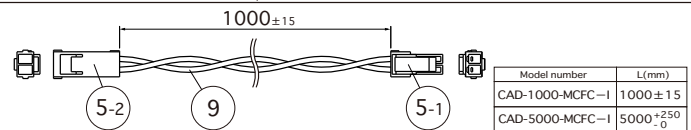Installation Dimensions (Side View)

Accessories • Option parts :
Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)Option parts : Outerclip for silux wide
(LSXW-PT-A) (5pcs / 1bag)Option parts :
Liftclip for silux (LSX-PTL) (2pcs / 1bag)Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Aluminum, alumite treatment	White	
2 Body Cover	Polycarbonate	Diffuser	
3 Side cover	Polycarbonate	Diffuser	
4 Lead wire		UL1007 AWG22, black +, white -	
5 Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6 Magnet	Neodymium magnet	Silver	
7 Mounting Clip	Polycarbonate	Clear	
8 Mounting Clip (Lift clip)	Polycarbonate	Clear	
9 Lead wire		UL1007 AWG20	
10 Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Item Number
Input voltage : DC24V Weight : 192g	LSXWK-1137-N-DF-I-8 LSXWK-1137-W-DF-I-8 LSXWK-1137-WW-DF-I-8 LSXWK-1137-L30-DF-I-8 LSXWK-1137-L27-DF-I-8 LSXWK-1137-L24-DF-I-8 LSXWK-1137-L21-DF-I-8
Power consumption : 9.2W Number of LEDs : 224	
Max. sets connectable : 6m	
Environment : Indoors (No Condensation)	
Operating temperature : 0°C~+35°C (No Condensation)	
Accessories : Multiclip K (5pcs / 1bag)	
Option parts : Power supply cable 3000mm,	
Joint cable 1000mm,	
Multiclip K (5pcs / 1bag)	
Liftclip (2pcs / 1bag)	
Outerclip (5pcs / 1bag)	
Magnet attachment	
Light Source color :	
Natural white : N : 5000K (673 lm* / Ra 93)	
White : W : 4000K (673 lm* / Ra 94)	
Warm white 3500K : WW : 3500K (644 lm* / Ra 94)	
Warm white 3000K : L30 : 3000K (630 lm* / Ra 93)	
Warm white 2700K : L27 : 2700K (601 lm* / Ra 93)	
Warm white 2400K : L24 : 2400K (588 lm* / Ra 94)	
Warm white 2100K : L21 : 2100K (487 lm* / Ra 90)	
*=Equivalent	

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series

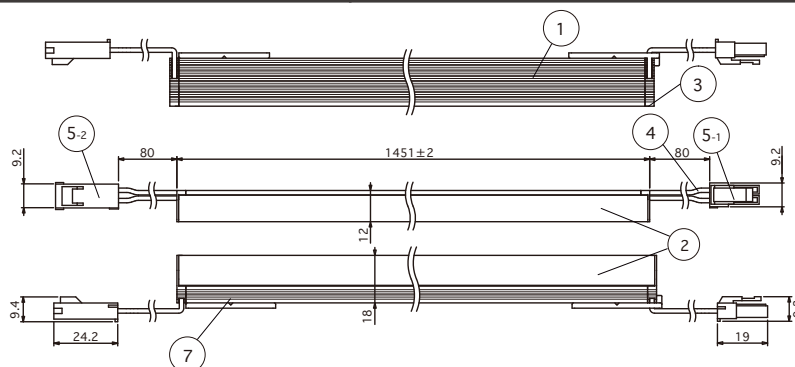
Luci silux wide K(8.1W/m)

Luci silux wide K(8.1W/m) 1451




Luci Pte. Ltd.


2022.07.12



Side View


-Multiclip K Mounted
(downward lighting)

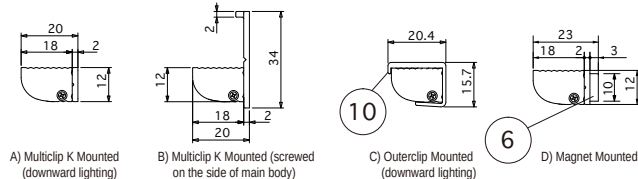Installation Dimensions (Side View)



Option parts :


Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)



⚠ Check the label on the DC + side for polarity.

Option parts :


Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Model number	L(mm)
CAD-1000-MCFC-I	1000±15
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₋₀

Accessories • Option parts :

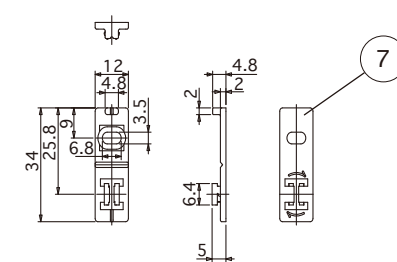Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)




Option parts : Outerclip for silux wide (LSXW-PT-A) (5pcs / 1bag)



Option parts :

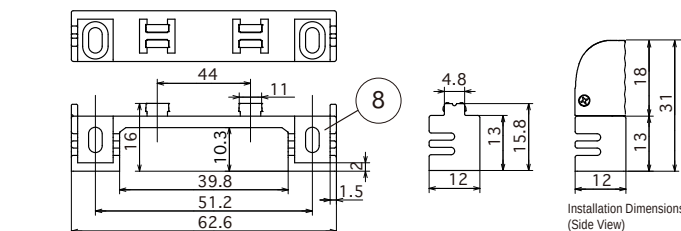Liftclip for silux (LSX-PTL) (2pcs / 1bag)

Installation Dimensions
(Side View)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	White	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 240g	Light Source color :	Item Number
Power consumption : 11.8W	Number of LEDs : 287		Natural white : N : 5000K (862 lm* / Ra 93)	LSXWK-1451-N-DF-I-8
Max. sets connectable : 6m			White : W : 4000K (862 lm* / Ra 94)	LSXWK-1451-W-DF-I-8
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (825 lm* / Ra 94)	LSXWK-1451-WW-DF-I-8
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K : L30 : 3000K (807 lm* / Ra 93)	LSXWK-1451-L30-DF-I-8
Accessories : Multiclip K (5pcs / 1bag)			Warm white 2700K : L27 : 2700K (770 lm* / Ra 93)	LSXWK-1451-L27-DF-I-8
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (715 lm* / Ra 94)	LSXWK-1451-L24-DF-I-8
Joint cable 1000mm,			Warm white 2100K : L21 : 2100K (624 lm* / Ra 90)	LSXWK-1451-L21-DF-I-8
Multiclip K (3pcs / 1bag)				
Liftclip (2pcs / 1bag)				
Outerclip (5pcs / 1bag)				
Magnet attachment				

*=Equivalent

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series

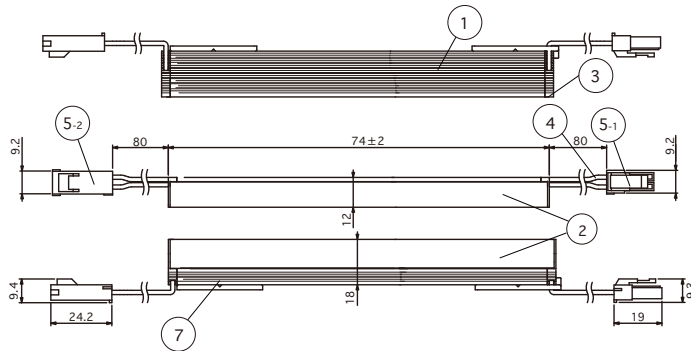
Luci silux wide K(13.3W/m)

Luci silux wide K(13.3W/m) 74




Luci Pte. Ltd.


2022.07.12



■ Side View


-Multiclip K Mounted
(downward lighting)

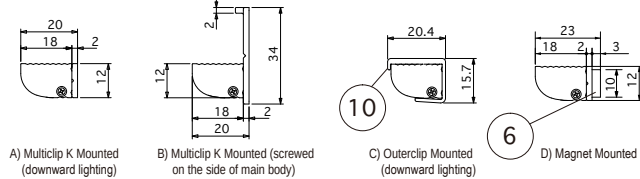Installation Dimensions (Side View)



Option parts :


Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)



⚠ Check the label on the DC + side for polarity.

Option parts :


Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Model number	L(mm)
CAD-1000-MCFC-I	1000±15
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₋₀

Accessories • Option parts :

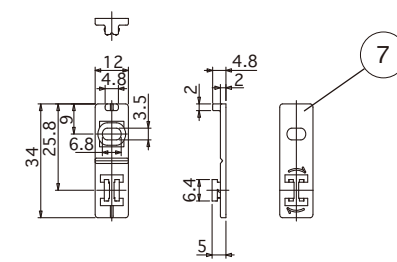Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)




Option parts : Outerclip for silux wide (LSXW-PT-A) (5pcs / 1bag)



Option parts :

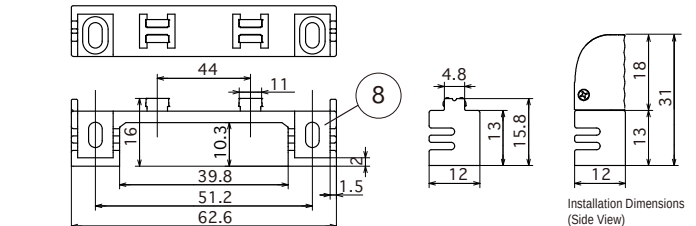Liftclip for silux (LSX-PTL) (2pcs / 1bag)

Installation Dimensions
(Side View)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	White	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 17g	Light Source color :	Item Number
Power consumption : 0.7W	Number of LEDs : 14		Natural white : N : 5000K (50 lm* / Ra 93)	LSXWK-0074-N-DF-I-13 LSXWK-0074-W-DF-I-13 LSXWK-0074-WW-DF-I-13 LSXWK-0074-L30-DF-I-13 LSXWK-0074-L27-DF-I-13 LSXWK-0074-L24-DF-I-13
Max. sets connectable : 6m			White : W : 4000K (50 lm* / Ra 94)	
Environment : Indoors (No Condensation)			Warm white 3500K : WW : 3500K (48 lm* / Ra 94)	
Operating temperature : 0°C ~ +35°C (No Condensation)			Warm white 3000K : L30 : 3000K (47 lm* / Ra 93)	
Accessories : Multiclip K (3pcs / 1bag)			Warm white 2700K : L27 : 2700K (45 lm* / Ra 93)	
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (42 lm* / Ra 94)	
Joint cable 1000mm,				
Multiclip K (3pcs / 1bag)				
Liftclip (2pcs / 1bag)				
Outerclip (5pcs / 1bag)				
Magnet attachment				

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series

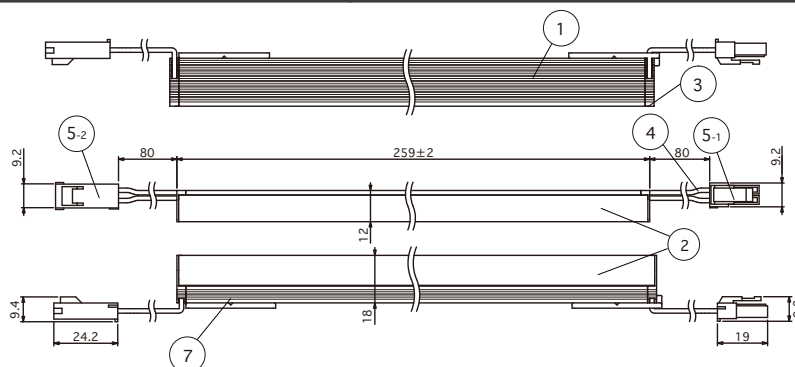
Luci silux wide K(13.3W/m)

Luci silux wide K(13.3W/m) 259




Luci Pte. Ltd.







2022.07.12



Side View

-Multiclip K Mounted
(downward lighting)

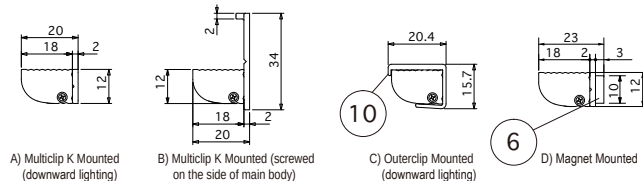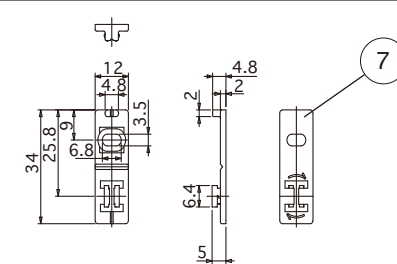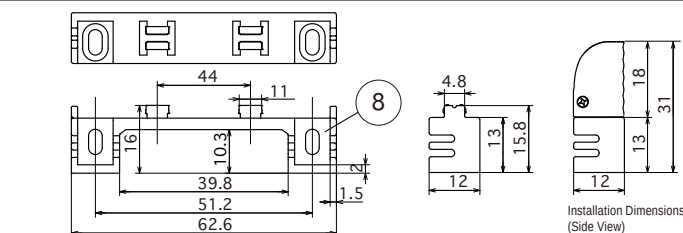Installation Dimensions (Side View)

Accessories • Option parts :
Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)Option parts : Outerclip for silux wide
(LSXW-PT-A) (5pcs / 1bag)Option parts :
Liftclip for silux (LSX-PTL) (2pcs / 1bag)Installation Dimensions
(Side View)Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)⚠ Check the label on the DC + side
for polarity.Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)

Model number	L(mm)
CAD-1000-MCFC-I	1000±15
CAD-5000-MCFC-I	5000±250 0

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Aluminum, alumite treatment	White	
2 Body Cover	Polycarbonate	Diffuser	
3 Side cover	Polycarbonate	Diffuser	
4 Lead wire		UL1007 AWG22, black +, white -	
5 Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6 Magnet	Neodymium magnet	Silver	
7 Mounting Clip	Polycarbonate	Clear	
8 Mounting Clip (Lift clip)	Polycarbonate	Clear	
9 Lead wire		UL1007 AWG20	
10 Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Item Number
Input voltage : DC24V Weight : 47g	LSXWK-0259-N-DF-I-13 LSXWK-0259-W-DF-I-13 LSXWK-0259-WW-DF-I-13 LSXWK-0259-L30-DF-I-13 LSXWK-0259-L27-DF-I-13 LSXWK-0259-L24-DF-I-13
Power consumption : 3.3W Number of LEDs : 49	
Max. sets connectable : 6m	
Environment : Indoors (No Condensation)	
Operating temperature : 0°C~+35°C (No Condensation)	
Accessories : Multiclip K (3pcs / 1bag)	
Option parts : Power supply cable 3000mm,	
Joint cable 1000mm,	
Multiclip K (3pcs / 1bag)	
Liftclip (2pcs / 1bag)	
Outerclip (5pcs / 1bag)	
Magnet attachment	
Light Source color :	
Natural white : N : 5000K (202 lm* / Ra 93)	
White : W : 4000K (202 lm* / Ra 94)	
Warm white 3500K : WW : 3500K (194 lm* / Ra 94)	
Warm white 3000K : L30 : 3000K (189 lm* / Ra 93)	
Warm white 2700K : L27 : 2700K (181 lm* / Ra 93)	
Warm white 2400K : L24 : 2400K (168 lm* / Ra 94)	
*=Equivalent	

Job/Project Name

Area/Location/Circuit No.

Product Code


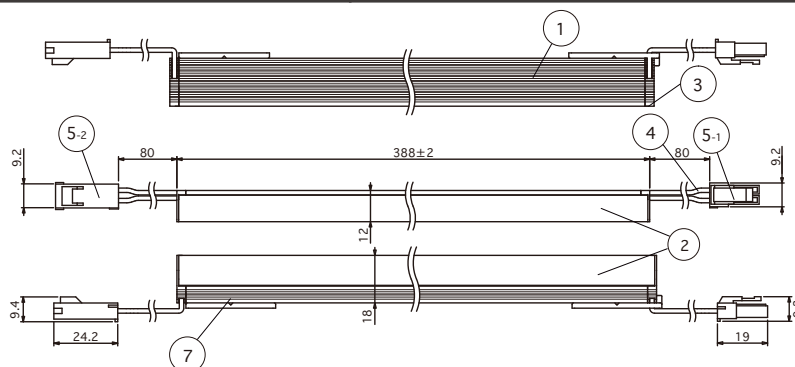
Qty.

Length(mm)


Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.


Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727




Installation Dimensions (Side View)

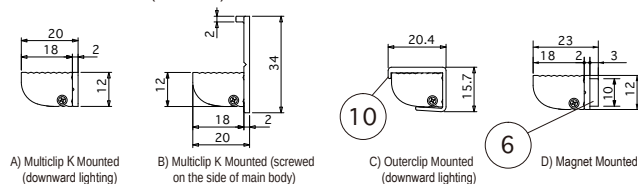

Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCNN-I)




Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Model number	L(mm)
CAD-1000-MCFC-I	1000±15
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀

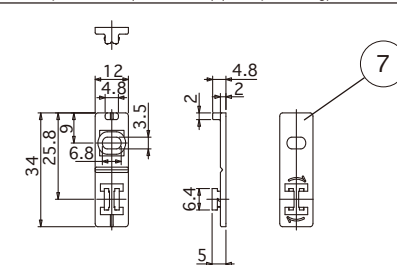
Accessories • Option parts :
Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)



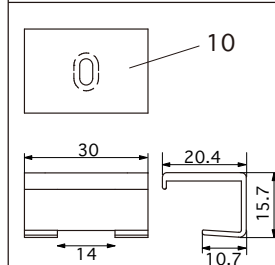Option parts : Outerclip for silux wide
(LSXW-PT-A) (5pcs / 1bag)



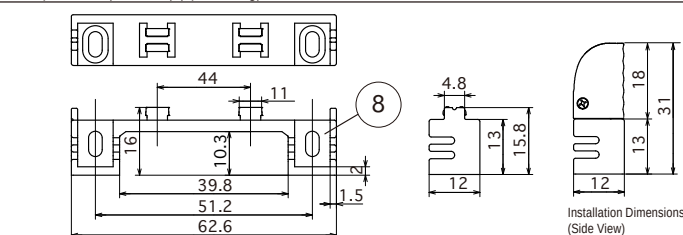Option parts :
Liftclip for silux (LSX-PTL) (2pcs / 1bag)



Spec · Rating may be subject to change without announcements

Unit Of Measure : mm

Part Name		Material	Note	Drawing
1	Body	Aluminum, alumite treatment	White	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black + , white –	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	



Spec	Input voltage : DC24V Weight : 69g	Light Source color :	Item Number
Power consumption : 5.2W	Number of LEDs : 77	Natural white : N : 5000K (304 lm* / Ra 93)	LSXWK-0388-N-DF-I 13 LSXWK-0388-W-DF-I 13 LSXWK-0388-WW-DF-I 13 LSXWK-0388-L30-DF-I 13 LSXWK-0388-L27-DF-I 13 LSXWK-0388-L24-DF-I 13
Max. sets connectable : 6m		White : W : 4000K (304 lm* / Ra 94)	
Environment : Indoors (No Condensation)		Warm white 3500K: WW : 3500K (291 lm* / Ra 94)	
Operating temperature : 0℃～+35℃ (No Condensation)		Warm white 3000K : L30 : 3000K (284 lm* / Ra 93)	
Accessories : Multiclip K (3pcs / 1bag)		Warm white 2700K : L27 : 2700K (272 lm* / Ra 93)	
Option parts : Power supply cable 3000mm,		Warm white 2400K : L24 : 2400K (252 lm* / Ra 94)	
Joint cable 1000mm,			
Multiclip K (3pcs / 1bag)			
Liftclip (2pcs / 1bag)		*=Equivalent	
Outerclip (5pcs / 1bag)			
Magnet attachment			

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ Tel: +65-6291-2410	Hong Kong Marketing Office Tel: +852-2219-8462 / Fax: +852-2219-8463
--	---

Korea Office
Tel: +82-2-508-2541

Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series

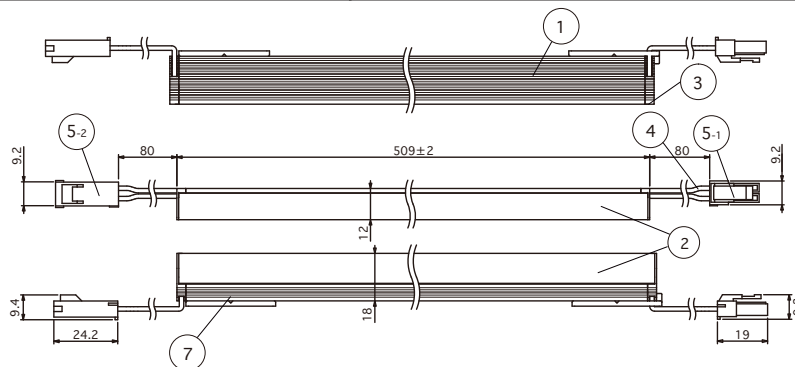
Luci silux wide K(13.3W/m)

Luci silux wide K(13.3W/m) 509




Luci Pte. Ltd.


2022.07.12



Side View

-Multiclip K Mounted
(downward lighting)

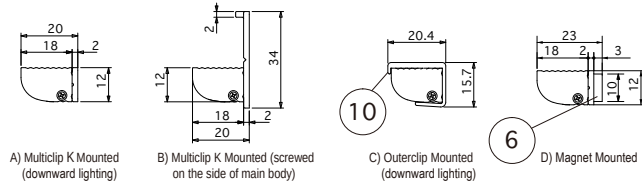
Installation Dimensions (Side View)

A) Multiclip K Mounted
(downward lighting)B) Multiclip K Mounted (screwed
on the side of main body)C) Outerclip Mounted
(downward lighting)

D) Magnet Mounted


Option parts :

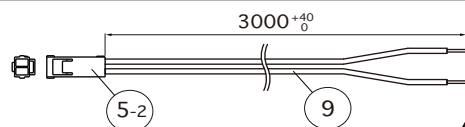Power supply cable 3000mm for SL connector (CAD-3000-MCNN-I)

⚠ Check the label on the DC + side
for polarity.

Option parts :



Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)



Model number	L(mm)
CAD-1000-MCFC-I	1000±15
CAD-5000-MCFC-I	5000±250 0


Accessories • Option parts :

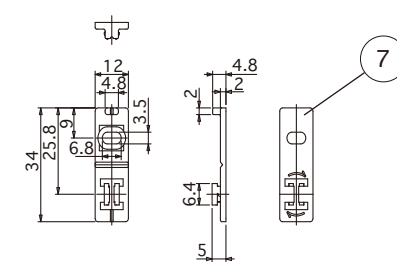Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

Option parts : Outerclip for silux wide
(LSXW-PT-A) (5pcs / 1bag)

Option parts :

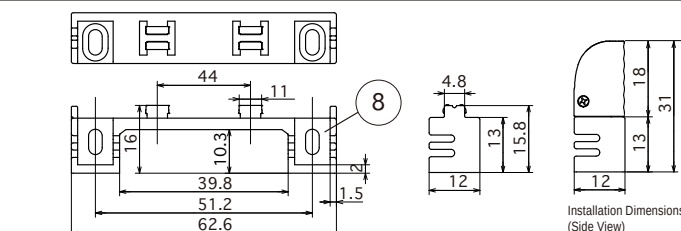Liftclip for silux (LSX-PTL) (2pcs / 1bag)

Installation Dimensions
(Side View)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	White	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 90g	Light Source color :	Item Number
Power consumption : 6.6W	Number of LEDs : 98		Natural white : N : 5000K (405 lm* / Ra 93)	LSXWK-0509-N-DF-I-13 LSXWK-0509-W-DF-I-13 LSXWK-0509-WW-DF-I-13 LSXWK-0509-L30-DF-I-13 LSXWK-0509-L27-DF-I-13 LSXWK-0509-L24-DF-I-13
Max. sets connectable : 6m			White : W : 4000K (405 lm* / Ra 94)	
Environment : Indoors (No Condensation)			Warm white 3500K: WW : 3500K (388 lm* / Ra 94)	
Operating temperature : 0°C~+35°C (No Condensation)			Warm white 3000K : L30 : 3000K (379 lm* / Ra 93)	
Accessories : Multiclip K (3pcs / 1 bag)			Warm white 2700K : L27 : 2700K (362 lm / Ra 93)	
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (336 lm* / Ra 94)	
Joint cable 1000mm,				
Multiclip K (3pcs / 1 bag)				
Liftclip (2pcs / 1 bag)				
Outerclip (5pcs / 1 bag)				
Magnet attachment				

*=Equivalent

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series

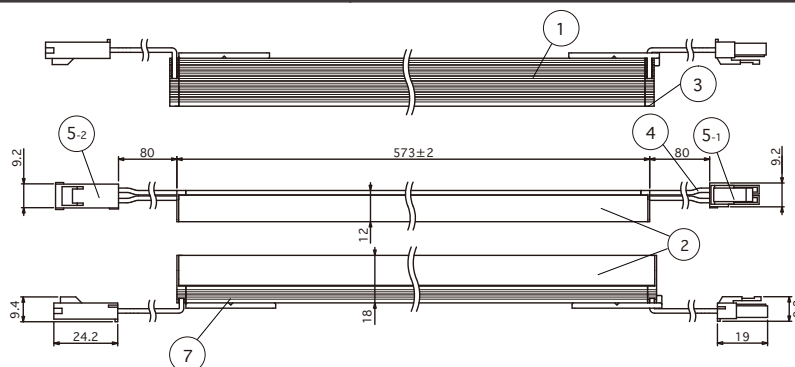
Luci silux wide K(13.3W/m)

Luci silux wide K(13.3W/m) 573




Luci Pte. Ltd.






2022.07.12




Side View

-Multiclip K Mounted
(downward lighting)

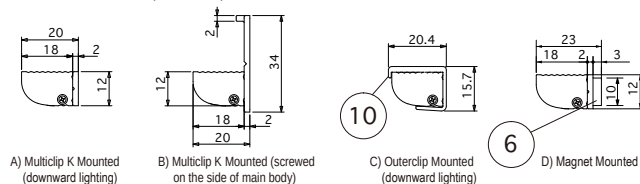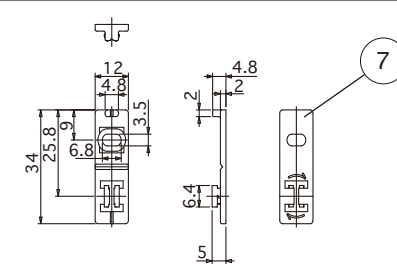Installation Dimensions (Side View)

Accessories • Option parts :
Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)Option parts : Outerclip for silux wide
(LSXW-PT-A) (5pcs / 1bag)Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)⚠ Check the label on the DC + side
for polarity.Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)

Model number	L(mm)
CAD-1000-MCFC-I	1000±15
CAD-5000-MCFC-I	5000±250/-0

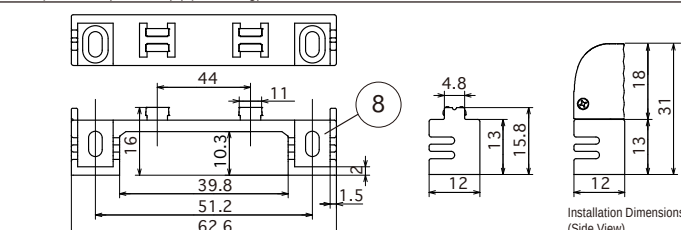Option parts :
Liftclip for silux (LSX-PTL) (2pcs / 1bag)Installation Dimensions
(Side View)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Aluminum, alumite treatment	White	
2 Body Cover	Polycarbonate	Diffuser	
3 Side cover	Polycarbonate	Diffuser	
4 Lead wire		UL1007 AWG22, black +, white -	
5 Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6 Magnet	Neodymium magnet	Silver	
7 Mounting Clip	Polycarbonate	Clear	
8 Mounting Clip (Lift clip)	Polycarbonate	Clear	
9 Lead wire		UL1007 AWG20	
10 Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Item Number
Input voltage : DC24V Weight : 100g	LSXWK-0573-N-DF-I-13 LSXWK-0573-W-DF-I-13 LSXWK-0573-WW-DF-I-13 LSXWK-0573-L30-DF-I-13 LSXWK-0573-L27-DF-I-13 LSXWK-0573-L24-DF-I-13
Power consumption : 7.6W Number of LEDs : 112	
Max. sets connectable : 6m	
Environment : Indoors (No Condensation)	
Operating temperature : 0°C~+35°C (No Condensation)	
Accessories : Multiclip K (3pcs / 1bag)	
Option parts : Power supply cable 3000mm,	
Joint cable 1000mm,	
Multiclip K (3pcs / 1bag)	
Liftclip (2pcs / 1bag)	
Outerclip (5pcs / 1bag)	
Magnet attachment	

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)
Luci Pte. Ltd. http://www.luci.co.jp/ E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ Tel: +65-6291-2410	Hong Kong Marketing Office Tel: +852-2219-8462 / Fax: +852-2219-8461
Korea Office Tel: +82-2-508-2541	Shanghai China mainland Regional HQ Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series

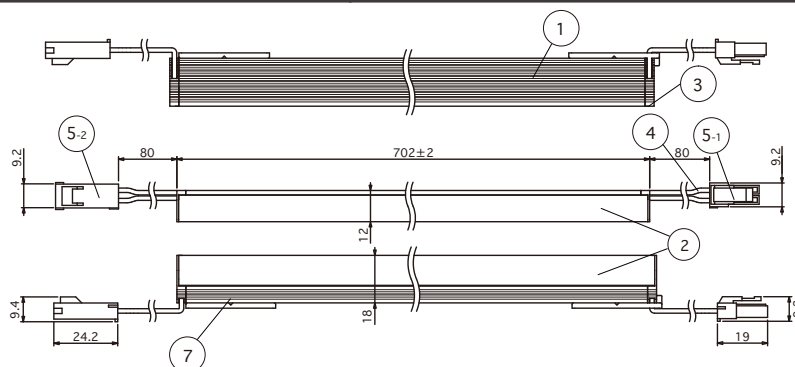
Luci silux wide K(13.3W/m)

Luci silux wide K(13.3W/m) 702




Luci Pte. Ltd.







2022.07.12



Side View

-Multiclip K Mounted
(downward lighting)

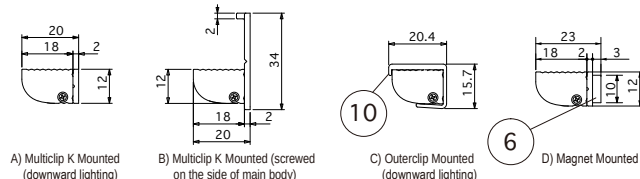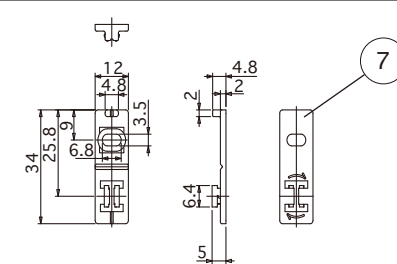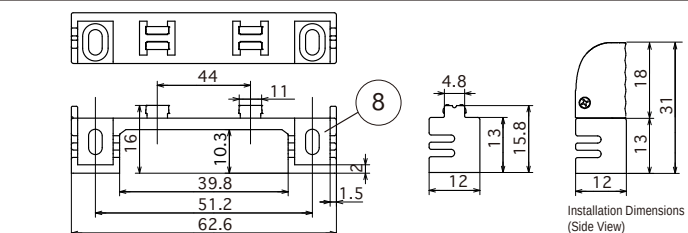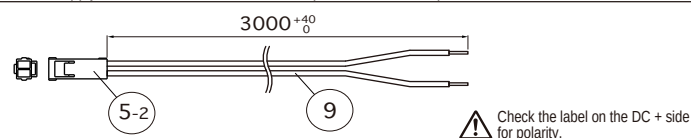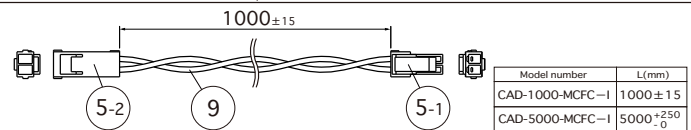Installation Dimensions (Side View)

Accessories • Option parts :
Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)Option parts : Outerclip for silux wide
(LSXW-PT-A) (5pcs / 1bag)Option parts :
Liftclip for silux (LSX-PTL) (2pcs / 1bag)Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCNN-I)Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Aluminum, alumite treatment	White	
2 Body Cover	Polycarbonate	Diffuser	
3 Side cover	Polycarbonate	Diffuser	
4 Lead wire		UL1007 AWG22, black +, white -	
5 Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6 Magnet	Neodymium magnet	Silver	
7 Mounting Clip	Polycarbonate	Clear	
8 Mounting Clip (Lift clip)	Polycarbonate	Clear	
9 Lead wire		UL1007 AWG20	
10 Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 120g	Light Source color :	Item Number
Power consumption : 9.5W	Number of LEDs : 140		Natural white : N : 5000K (558 lm* / Ra 94)	LSXWK-0702-N-DF-I-13 LSXWK-0702-W-DF-I-13 LSXWK-0702-WW-DF-I-13 LSXWK-0702-L30-DF-I-13 LSXWK-0702-L27-DF-I-13 LSXWK-0702-L24-DF-I-13
Max. sets connectable : 6m			White : W : 4000K (558 lm* / Ra 93)	
Environment : Indoors (No Condensation)			Warm white 3500K: WW : 3500K (534 lm* / Ra 93)	
Operating temperature : 0°C~+35°C (No Condensation)			Warm white 3000K : L30 : 3000K (522 lm* / Ra 94)	
Accessories : Multiclip K (3pcs / 1 bag)			Warm white 2700K : L27 : 2700K (498 lm / Ra 94)	
Option parts : Power supply cable 3000mm,			Warm white 2400K : L24 : 2400K (463 lm* / Ra 93)	
Joint cable 1000mm,				
Multiclip K (3pcs / 1 bag)				
Liftclip (2pcs / 1 bag)				
Outerclip (5pcs / 1 bag)				
Magnet attachment				

*=Equivalent

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series

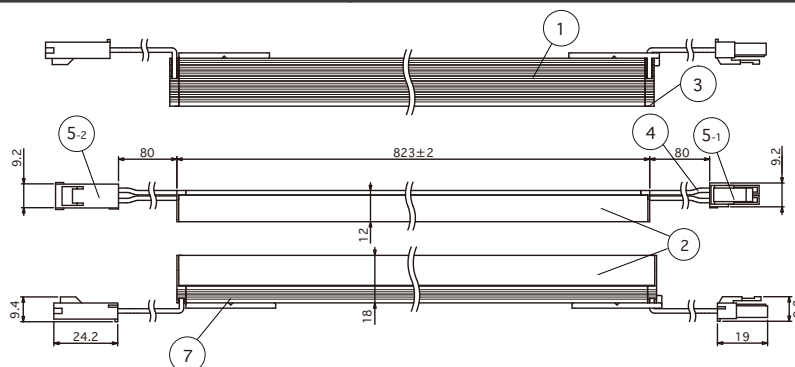
Luci silux wide K(13.3W/m)

Luci silux wide K(13.3W/m) 823




Luci Pte. Ltd.







2022.07.12



Side View

-Multiclip K Mounted
(downward lighting)

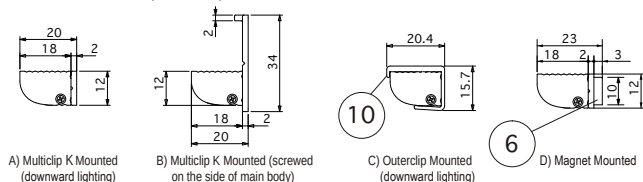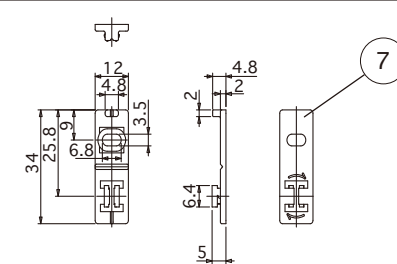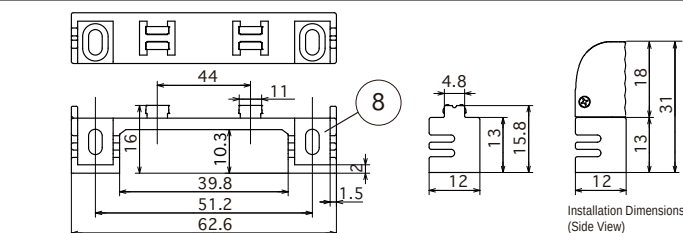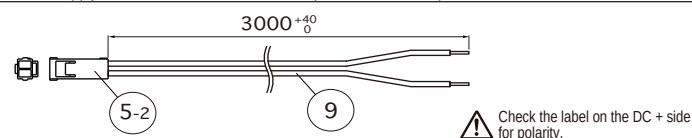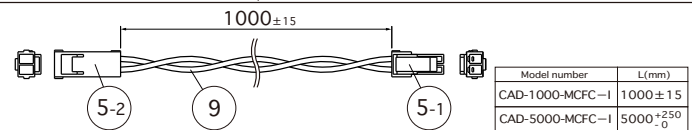Installation Dimensions (Side View)

Accessories • Option parts :
Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)Option parts : Outerclip for silux wide
(LSXW-PT-A) (5pcs / 1bag)Option parts :
Liftclip for silux (LSX-PTL) (2pcs / 1bag)Installation Dimensions
(Side View)Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	White	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 140g	Light Source color :	Item Number
Power consumption : 10.9W	Number of LEDs : 161		Natural white : N : 5000K (659 lm* / Ra 94)	LSXWK-0823-N-DF-I-13 LSXWK-0823-W-DF-I-13 LSXWK-0823-WW-DF-I-13 LSXWK-0823-L30-DF-I-13 LSXWK-0823-L27-DF-I-13 LSXWK-0823-L24-DF-I-13
Max. sets connectable : 6m			White : W : 4000K (659 lm* / Ra 93)	
Environment : Indoors (No Condensation)			Warm white 3500K: WW : 3500K (631 lm* / Ra 93)	
Operating temperature : 0°C~+35°C (No Condensation)			Warm white 3000K: L30 : 3000K (617 lm* / Ra 94)	
Accessories : Multiclip K (5pcs / 1bag)			Warm white 2700K: L27 : 2700K (589 lm* / Ra 94)	
Option parts : Power supply cable 3000mm,			Warm white 2400K: L24 : 2400K (547 lm* / Ra 93)	
Joint cable 1000mm,				
Multiclip K (3pcs / 1bag)				
Liftclip (2pcs / 1bag)				
Outerclip (5pcs / 1bag)				
Magnet attachment				

*=Equivalent

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series

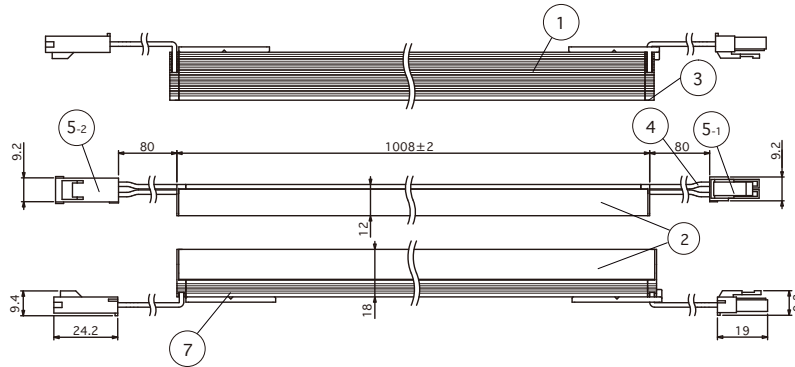
Luci silux wide K(13.3W/m)

Luci silux wide K(13.3W/m) 1008




Luci Pte. Ltd.


2022.07.12



Side View


-Multiclip K Mounted
(downward lighting)

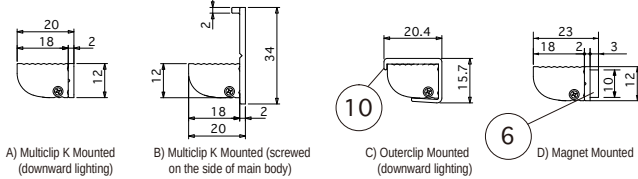Installation Dimensions (Side View)



Option parts :


Power supply cable 3000mm for SL connector (CAD-3000-MCNN-I)



⚠ Check the label on the DC + side for polarity.

Option parts :


Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Model number	L(mm)
CAD-1000-MCFC-I	1000±15
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₋₀

Accessories • Option parts :

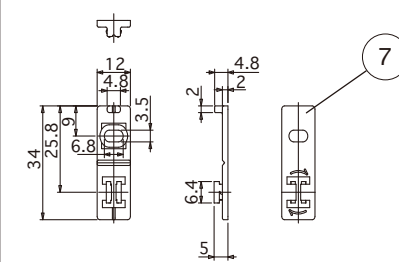Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)




Option parts : Outerclip for silux wide (LSXW-PT-A) (5pcs / 1bag)



Option parts :

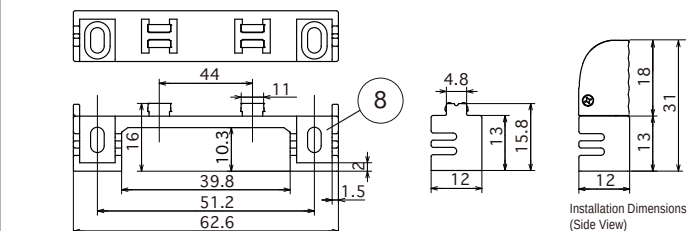Liftclip for silux (LSX-PTL) (2pcs / 1bag)

Installation Dimensions
(Side View)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	White	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black +, white -	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : 170g	Light Source color :	Item Number
Power consumption : 13.3W	Number of LEDs : 196		Natural white : N : 5000K (811 lm* / Ra 93)	LSXWK-1008-N-DF-I-13 LSXWK-1008-W-DF-I-13 LSXWK-1008-WW-DF-I-13 LSXWK-1008-L30-DF-I-13 LSXWK-1008-L27-DF-I-13 LSXWK-1008-L24-DF-I-13
Max. sets connectable : 6m			White : W : 4000K (811 lm* / Ra 94)	
Environment : Indoors (No Condensation)			Warm white 3500K: WW : 3500K (777 lm* / Ra 94)	
Operating temperature : 0°C~+35°C (No Condensation)			Warm white 3000K: L30 : 3000K (759 lm* / Ra 93)	
Accessories : Multiclip K (5pcs / 1bag)			Warm white 2700K: L27 : 2700K (725 lm* / Ra 93)	
Option parts : Power supply cable 3000mm,			Warm white 2400K: L24 : 2400K (673 lm* / Ra 94)	
Joint cable 1000mm,				
Multiclip K (3pcs / 1bag)				
Liftclip (2pcs / 1bag)				
Outerclip (5pcs / 1bag)				
Magnet attachment				

*=Equivalent

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series

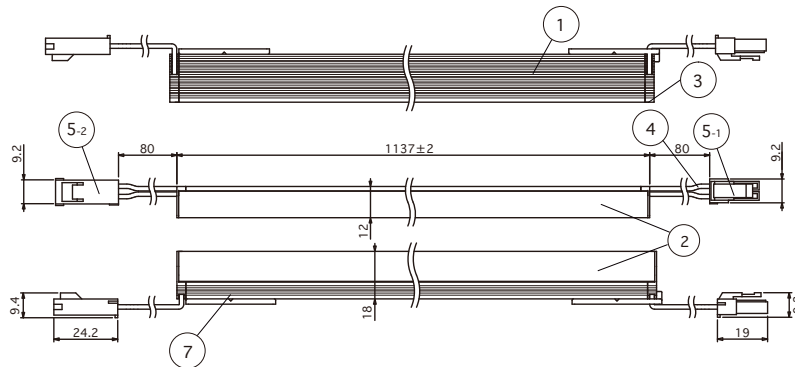
Luci silux wide K(13.3W/m)

Luci silux wide K(13.3W/m) 1137




Luci Pte. Ltd.


2022.07.12



Side View


-Multiclip K Mounted
(downward lighting)

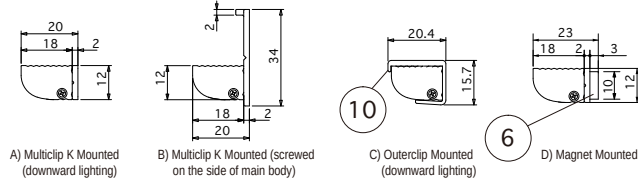Installation Dimensions (Side View)



Option parts :


Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)



⚠ Check the label on the DC + side for polarity.

Option parts :


Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Model number	L(mm)
CAD-1000-MCFC-I	1000±15
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₋₀

Accessories • Option parts :

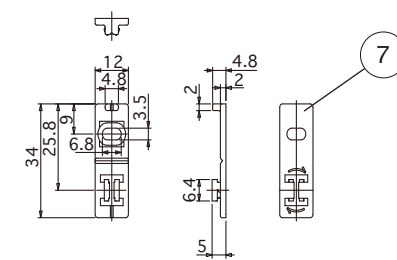Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)




Option parts : Outerclip for silux wide (LSXW-PT-A) (5pcs / 1bag)



Option parts :

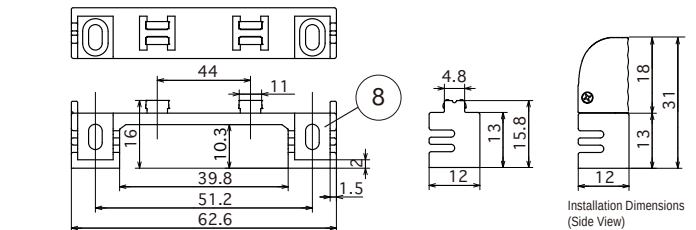Liftclip for silux (LSX-PTL) (2pcs / 1bag)

Installation Dimensions
(Side View)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Aluminum, alumite treatment	White	
2 Body Cover	Polycarbonate	Diffuser	
3 Side cover	Polycarbonate	Diffuser	
4 Lead wire		UL1007 AWG22, black +, white -	
5 Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6 Magnet	Neodymium magnet	Silver	
7 Mounting Clip	Polycarbonate	Clear	
8 Mounting Clip (Lift clip)	Polycarbonate	Clear	
9 Lead wire		UL1007 AWG20	
10 Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Item Number
Input voltage : DC24V Weight : 192g	LSXWK-1137-N-DF-I-13 LSXWK-1137-W-DF-I-13 LSXWK-1137-WW-DF-I-13 LSXWK-1137-L30-DF-I-13 LSXWK-1137-L27-DF-I-13 LSXWK-1137-L24-DF-I-13
Power consumption : 15.2W Number of LEDs : 224	
Max. sets connectable : 6m	
Environment : Indoors (No Condensation)	
Operating temperature : 0°C~+35°C (No Condensation)	
Accessories : Multiclip K (5pcs / 1bag)	
Option parts : Power supply cable 3000mm,	
Joint cable 1000mm,	
Multiclip K (3pcs / 1bag)	
Liftclip (2pcs / 1bag)	
Outerclip (5pcs / 1bag)	
Magnet attachment	

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727

silux series

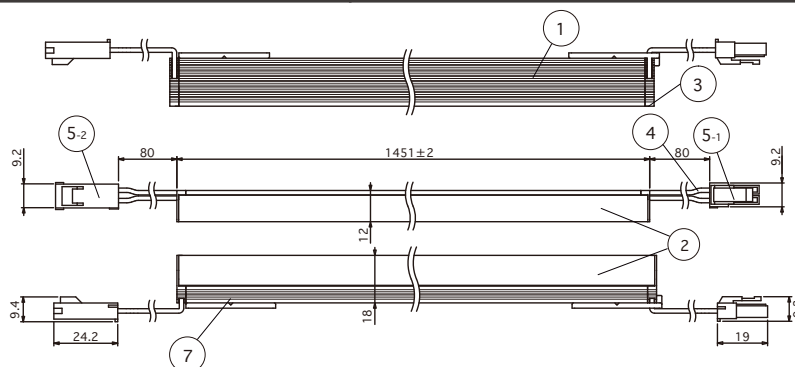
Luci silux wide K(13.3W/m)

Luci silux wide K(13.3W/m) 1451




Luci Pte. Ltd.





2022.07.12




Side View

-Multiclip K Mounted
(downward lighting)

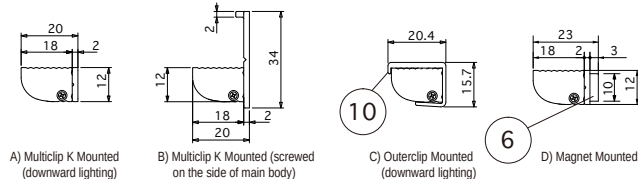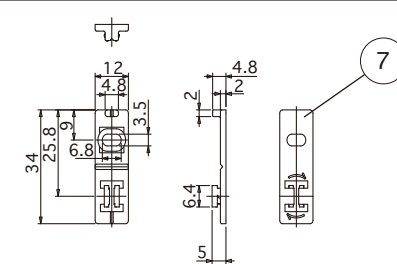Installation Dimensions (Side View)

Accessories • Option parts :
Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)Option parts : Outerclip for silux wide
(LSXW-PT-A) (5pcs / 1bag)Option parts :
Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)⚠ Check the label on the DC + side
for polarity.Option parts :
Joint cable 1000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)

Model number	L(mm)
CAD-1000-MCFC-I	1000±15
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₋₀

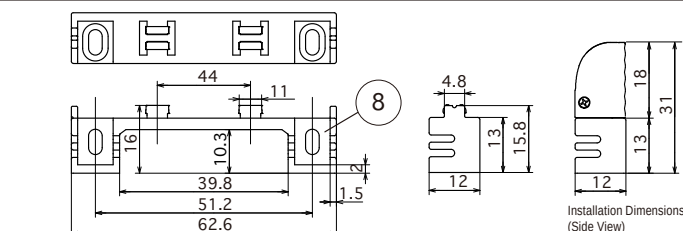Option parts :
Liftclip for silux (LSX-PTL) (2pcs / 1bag)Installation Dimensions
(Side View)

Spec • Rating may be subject to change without announcements

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body	Aluminum, alumite treatment	White	
2 Body Cover	Polycarbonate	Diffuser	
3 Side cover	Polycarbonate	Diffuser	
4 Lead wire		UL1007 AWG22, black +, white -	
5 Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6 Magnet	Neodymium magnet	Silver	
7 Mounting Clip	Polycarbonate	Clear	
8 Mounting Clip (Lift clip)	Polycarbonate	Clear	
9 Lead wire		UL1007 AWG20	
10 Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Item Number
Input voltage : DC24V Weight : 240g	LSXWK-1451-N-DF-I-13 LSXWK-1451-W-DF-I-13 LSXWK-1451-WW-DF-I-13 LSXWK-1451-L30-DF-I-13 LSXWK-1451-L27-DF-I-13 LSXWK-1451-L24-DF-I-13
Power consumption : 19.5W Number of LEDs : 287	
Max. sets connectable : 6m	
Environment : Indoors (No Condensation)	
Operating temperature : 0°C~+35°C (No Condensation)	
Accessories : Multiclip K (5pcs / 1bag)	
Option parts : Power supply cable 3000mm,	
Joint cable 1000mm,	
Multiclip K (3pcs / 1bag)	
Liftclip (2pcs / 1bag)	
Outerclip (5pcs / 1bag)	
Magnet attachment	

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)
Luci Pte. Ltd. http://www.luci.co.jp/ E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ Tel: +65-6291-2410	Hong Kong Marketing Office Tel: +852-2219-8462 / Fax: +852-2219-8461
Korea Office Tel: +82-2-508-2541	Shanghai China mainland Regional HQ Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727