



Side View




Over View



Front View




Side View




- Multiclip K Mounted
(Upward lighting)




Installation Dimensions (Side View)

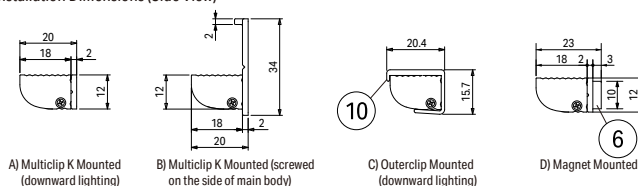


Attachment : Multiclip K for silux (LSX-PTM-C)
3pcs : 60mm ~ 760mm 5pcs : 810mm ~ 1410mm
Accessories : Multiclip K for silux (LSX-PTM-C) (3 or 5pcs / 1bag)

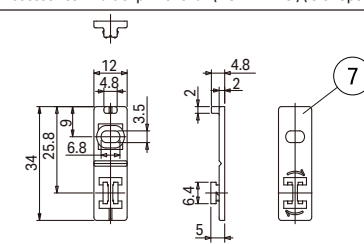

Accessories : Outerclip for silux
(LSX-PT-A) (5pcs / 1bag)




Accessories :
Power supply cable 3000mm for SL connector (CAD-3000-MCNC-I)




⚠ Check the label on the DC + side for polarity.

Accessories :
Joint cable 1000mm/5000mm for SL connector (CAD-1000-MCFC-I, CAD-5000-MCFC-I)




Model number	Length
CAD-1000-MCFC-I	1000±15
CAD-5000-MCFC-I	5000 ⁺²⁵⁰ ₀

Accessories :
Liftclip for silux (LSX-PTL) (2pcs / 1bag)

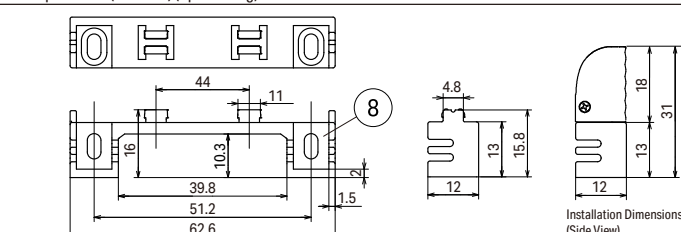

The specifications and prices are subject to change without prior notice. Unit Of Measure : mm

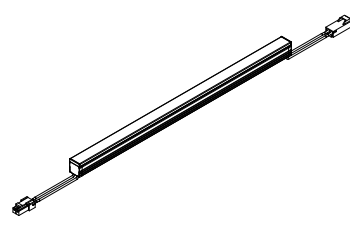	Part Name	Material	Note	Drawing
1	Body	Alumite treatment	White	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG22, black+, white-	
5	Connector	Nylon	5-1:UL94 V-2 White 5-2:UL94 V-2 White	
6	Magnet	Neodymium magnet	Silver	
7	Mounting Clip	Polycarbonate	Clear	
8	Mounting Clip (Lift clip)	Polycarbonate	Clear	
9	Lead wire		UL1007 AWG20	
10	Mounting Clip (Outer clip)	Polycarbonate	Clear	

Spec	Input voltage : DC24V	Weight : _ g (Refer to appendix)	Light source color	Daylight white : D : 6500K	Model No.
	Wattage : _ W (Refer to appendix)			Natural white : N : 5000K	LSXY - [Length] - [Light source color] - DF - I - [Wattage]
	Max. length per circuit : 6m (2.1W/m 4.2W/m 6.4W/m 10.8W/m) 5m (15.9W/m)			White : W : 4000K	0060 0760 D : 6500K 2 : 2.1 W / m
	Environment : Indoors (No condensation)			Warm white 3500K : WW : 3500K	0110 0810 N : 5000K 4 : 4.2 W / m
	Operating temperature : 0°C ~ +35°C (No condensation)			Warm white 3000K : L30 : 3000K	0160 0860 W : 4000K 6 : 6.4 W / m
	Attachments : Multiclip K (3pcs : 60mm ~ 760mm, 5pcs : 810mm ~ 1410mm)			Warm white 2700K : L27 : 2700K	0210 0910 WW : 3500K 10 : 10.8 W / m
	Accessories : Power supply cable 3000mm,			Warm white 2500K : L25 : 2500K	0260 0960 L30 : 3000K 15 : 15.9 W / m
	Joint cable 1000mm,			Warm white 2200K : L22 : 2200K	0310 1010 L27 : 2700K
	Multiclip K (3pcs / 1bag), Liftclip (2pcs / 1bag)			Warm white 2000K : L20 : 2000K	0360 1060 L25 : 2500K
	Outerclip (5pcs / 1bag), Magnet attachment			Warm white 1800K : L18 : 1800K	0410 1110 L22 : 2200K
					0460 1160 L20 : 2000K
					0510 1210 L18 : 1800K
					0560 1260
					0610 1310
					0660 1360
					0710 1410

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd.

http://www.luci.co.jp

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / E-mail: info@luci.co.jp

Specifications [LSXY]

LSXY -

Length

 -


Light source color

 - DF- I -

Wattage

Specifications by length

Length	Fitting length (L)	Wattage					Weight
		2.1W/m	4.2W/m	6.4W/m	10.8W/m	15.9W/m	
0060	60.0mm	0.1W	0.2W	0.3W	0.5W	0.8W	12g
0110	110.0mm	0.2W	0.4W	0.6W	1.1W	1.6W	20g
0160	160.0mm	0.3W	0.6W	1.0W	1.6W	2.4W	27g
0210	210.0mm	0.4W	0.8W	1.3W	2.2W	3.2W	35g
0260	260.0mm	0.5W	1.1W	1.6W	2.7W	4.0W	42g
0310	310.0mm	0.6W	1.3W	1.9W	3.3W	4.8W	50g
0360	360.0mm	0.7W	1.5W	2.2W	3.8W	5.6W	67g
0410	410.0mm	0.8W	1.7W	2.6W	4.3W	6.4W	75g
0460	460.0mm	1.0W	1.9W	2.9W	4.9W	7.1W	82g
0510	510.0mm	1.1W	2.1W	3.2W	5.4W	7.9W	90g
0560	560.0mm	1.2W	2.3W	3.5W	6.0W	8.7W	97g
0610	610.0mm	1.3W	2.5W	3.8W	6.5W	9.5W	105g
0660	660.0mm	1.4W	2.8W	4.2W	7.0W	10.3W	112g
0710	710.0mm	1.5W	3.0W	4.5W	7.6W	11.1W	120g
0760	760.0mm	1.6W	3.2W	4.8W	8.1W	11.9W	127g
0810	810.0mm	1.7W	3.4W	5.1W	8.7W	12.7W	135g
0860	860.0mm	1.8W	3.6W	5.4W	9.2W	13.5W	142g
0910	910.0mm	1.9W	3.8W	5.8W	9.8W	14.3W	150g
0960	960.0mm	2.0W	4.0W	6.1W	10.3W	15.1W	162g
1010	1010.0mm	2.1W	4.2W	6.4W	10.8W	15.9W	170g
1060	1060.0mm	2.2W	4.5W	6.7W	11.4W	16.7W	177g
1110	1110.0mm	2.3W	4.7W	7.0W	11.9W	17.5W	185g
1160	1160.0mm	2.4W	4.9W	7.3W	12.5W	18.3W	192g
1210	1210.0mm	2.5W	5.1W	7.7W	13.0W	19.1W	200g
1260	1260.0mm	2.7W	5.3W	8.0W	13.5W	19.9W	207g
1310	1310.0mm	2.8W	5.5W	8.3W	14.1W	20.7W	215g
1360	1360.0mm	2.9W	5.7W	8.6W	14.6W	21.4W	222g
1410	1410.0mm	3.0W	5.9W	8.9W	15.2W	22.2W	230g



Photometry characteristic

Wattage 2 : 2.1W/m											
Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18	
Luminous flux	168lm	167lm	164lm	163lm	158lm	149lm	110lm	103lm	94lm	91lm/m	
Luminaire efficiency	79.3lm/W	78.6lm/W	77.2lm/W	76.5lm/W	74.4lm/W	70.2lm/W	51.9lm/W	48.4lm/W	44.2lm/W	42.8lm/W	

Wattage 4 : 4.2W/m											
Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18	
Luminous flux	342lm/m	339lm/m	333lm/m	330lm/m	321lm/m	302lm/m	224lm/m	209lm/m	191lm/m	184lm/m	
Luminaire efficiency	80.5lm/W	79.8lm/W	78.4lm/W	77.7lm/W	75.6lm/W	71.1lm/W	52.7lm/W	49.2lm/W	45.0lm/W	43.4lm/W	

Wattage 6 : 6.4W/m											
Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18	
Luminous flux	508lm/m	504lm/m	495lm/m	490lm/m	477lm/m	450lm/m	333lm/m	310lm/m	283lm/m	274lm/m	
Luminaire efficiency	79.5lm/W	78.9lm/W	77.5lm/W	76.7lm/W	74.6lm/W	70.4lm/W	52.1lm/W	48.5lm/W	44.3lm/W	42.9lm/W	

Wattage 10 : 10.8W/m											
Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18	
Luminous flux	856lm/m	848lm/m	833lm/m	826lm/m	803lm/m	757lm/m	561lm/m	523lm/m	477lm/m	462lm/m	
Luminaire efficiency	79.0lm/W	78.3lm/W	76.9lm/W	76.2lm/W	74.1lm/W	69.9lm/W	51.8lm/W	48.3lm/W	44.0lm/W	42.6lm/W	

Wattage 15 : 15.9W/m											
Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18	
Luminous flux	1240lm/m	1229lm/m	1207lm/m	1196lm/m	1164lm/m	1098lm/m	812lm/m	757lm/m	692lm/m	670lm/m	
Luminaire efficiency	78.1lm/W	77.4lm/W	76.0lm/W	75.3lm/W	73.3lm/W	69.1lm/W	51.1lm/W	47.7lm/W	43.6lm/W	42.2lm/W	

Light source color	D	N	W	WW	L30	L27	L25	L22	L20	L18	
CRI	Ra96	Ra93	Ra97	Ra97	Ra95	Ra94	Ra94	Ra93	Ra91	Ra90	

The values are measured values, not guaranteed values.