

## THOF series

## Luci THOF



## Luci THOF 100


Luci Pte., Ltd.

2022.07.12

Front View



Side View 1

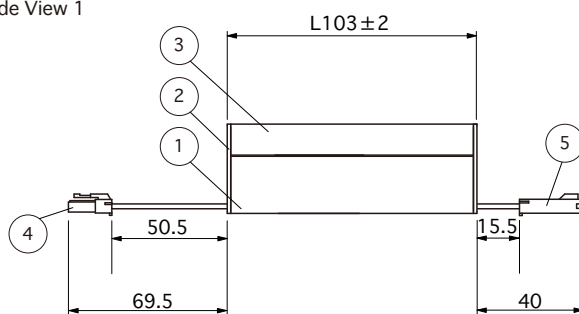


Side View 2




Accessories :  
Mounting parts A for THOF  
(LTH-PTA)

(2pcs included, 2pcs/1bag)

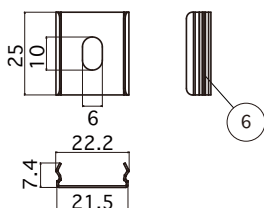

Option parts :  
Power supply cable 500mm for THOF  
(CAD-0500-MDFD-I)

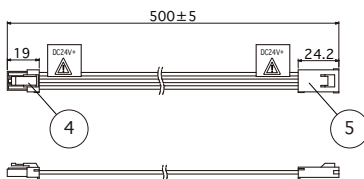

Installation Dimensions  
(Side View)



Unit Of Measure : mm

The specifications and prices are subject to change without prior notice.

|   | Part Name      | Material                    | Note           | Drawing |
|---|----------------|-----------------------------|----------------|---------|
| 1 | Body           | Aluminum, alumite treatment | Silver         |         |
| 2 | Side cover     | Polycarbonate               | Diffuser       |         |
| 3 | Cover          | Polycarbonate               | Diffuser       |         |
| 4 | Connector      | Nylon                       | UL94 V-2 White |         |
| 5 | Connector      | Nylon                       | UL94 V-2 White |         |
| 6 | Mounting parts | Stainless steel             | Silver         |         |
| 7 |                |                             |                |         |
| 8 |                |                             |                |         |
| 9 |                |                             |                |         |

| Spec | Input voltage : DC24V                             | Light Source color : Natural white (5300K) | Item Number        |
|------|---------------------------------------------------|--------------------------------------------|--------------------|
|      | Power consumption : 3.1W                          |                                            | LTH-0100-NL27-DF-I |
|      | Weight : 50g                                      |                                            |                    |
|      | Lamp fitting length(L) : 103mm                    |                                            |                    |
|      | Max. sets connectable : 4m                        |                                            |                    |
|      | Environment : Indoors ( No Condensation )         |                                            |                    |
|      | Attachments : Mounting parts A for THOF (LTH-PTA) |                                            |                    |
|      | Option parts : Power supply cable 500mm for THOF  |                                            |                    |
|      | Dimmable : ○ (Dynamic white)                      |                                            |                    |
|      |                                                   |                                            |                    |

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp>E-mail: [info@luci.co.jp](mailto:info@luci.co.jp)

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ Hong Kong Marketing Office

Korea Office

Shanghai China mainland Regional HQ

Tel: +65-6291-2410

Tel: +852-2219-8462 / Fax: +852-2219-8461

Tel: +82-2-508-2541

Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : [info@luci.co.jp](mailto:info@luci.co.jp)

## THOF series

## Luci THOF

Luci THOF 500




Luci Pte., Ltd.

2022.07.12


Front View




Side View 1

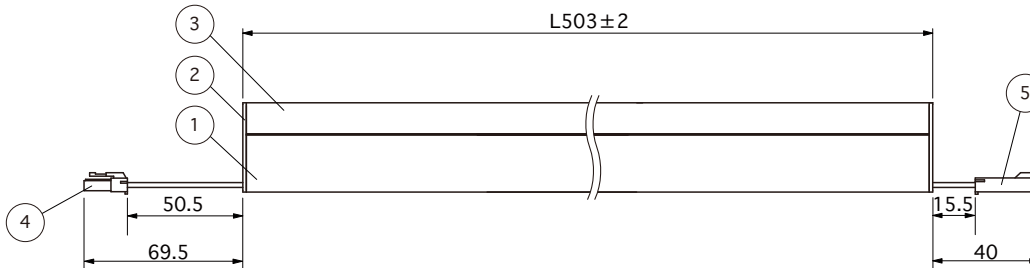


Side View 2



Accessories :  
Mounting parts A for THOF  
(LTH-PTA)  
(2pcs included, 2pcs/1 bag)

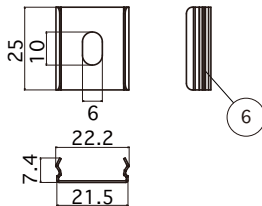

Option parts :  
Power supply cable 500mm for THOF  
(CAD-0500-MDFD-I)

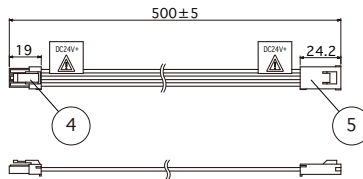

Installation Dimensions  
(Side View)



Unit Of Measure : mm

The specifications and prices are subject to change without prior notice.

|   | Part Name      | Material                    | Note           | Drawing |
|---|----------------|-----------------------------|----------------|---------|
| 1 | Body           | Aluminum, alumite treatment | Silver         |         |
| 2 | Side cover     | Polycarbonate               | Diffuser       |         |
| 3 | Cover          | Polycarbonate               | Diffuser       |         |
| 4 | Connector      | Nylon                       | UL94 V-2 White |         |
| 5 | Connector      | Nylon                       | UL94 V-2 White |         |
| 6 | Mounting parts | Stainless steel             | Silver         |         |
| 7 |                |                             |                |         |
| 8 |                |                             |                |         |
| 9 |                |                             |                |         |

| Spec | Input voltage : DC24V                             | Light Source color : Natural white (5300K) | Item Number        |
|------|---------------------------------------------------|--------------------------------------------|--------------------|
|      | Power consumption : 15.6W                         |                                            | LTH-0500-NL27-DF-I |
|      | Weight : 210g                                     |                                            |                    |
|      | Lamp fitting length(L) : 503mm                    |                                            |                    |
|      | Max. sets connectable : 4m                        |                                            |                    |
|      | Environment : Indoors ( No Condensation )         |                                            |                    |
|      | Attachments : Mounting parts A for THOF (LTH-PTA) |                                            |                    |
|      | Option parts : Power supply cable 500mm for THOF  |                                            |                    |
|      | Dimmable : ○ (Dynamic white)                      |                                            |                    |
|      |                                                   |                                            |                    |

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp>E-mail: [info@luci.co.jp](mailto:info@luci.co.jp)Singapore World HQ  
Tel: +65-6291-2410

Hong Kong Marketing Office

Tel: +852-2219-8462 / Fax: +852-2219-8461

Korea Office

Tel: +82-2-508-2541

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Shanghai China mainland Regional HQ

Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : [info@luci.co.jp](mailto:info@luci.co.jp)

THOF series

Luci THOF

Luci THOF 1000

Luci Pte., Ltd.


2022.07.12




Front View




Side View 1

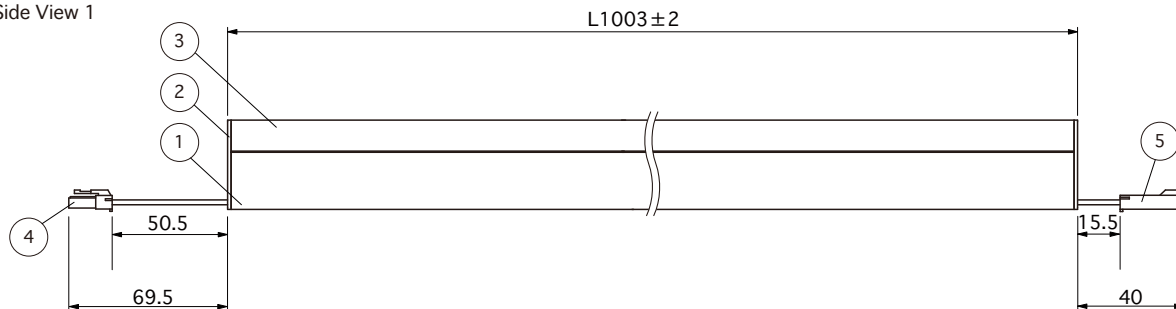


Side View 2



Accessories :  
Mounting parts A for THOF  
(LTH-PTA)  
(2pcs included, 2pcs/1bag)

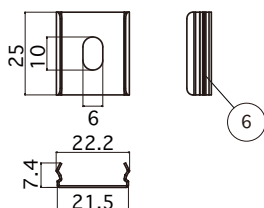

Option parts :  
Power supply cable 500mm for THOF  
(CAD-0500-MDFD-I)

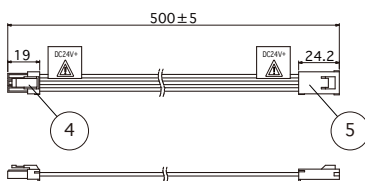

Installation Dimensions  
(Side View)



Unit Of Measure : mm

The specifications and prices are subject to change without prior notice.

|   | Part Name      | Material                    | Note           | Drawing |
|---|----------------|-----------------------------|----------------|---------|
| 1 | Body           | Aluminum, alumite treatment | Silver         |         |
| 2 | Side cover     | Polycarbonate               | Diffuser       |         |
| 3 | Cover          | Polycarbonate               | Diffuser       |         |
| 4 | Connector      | Nylon                       | UL94 V-2 White |         |
| 5 | Connector      | Nylon                       | UL94 V-2 White |         |
| 6 | Mounting parts | Stainless steel             | Silver         |         |
| 7 |                |                             |                |         |
| 8 |                |                             |                |         |
| 9 |                |                             |                |         |

| Spec | Input voltage : DC24V                             | Light Source color : Natural white (5300K) | Item Number        |
|------|---------------------------------------------------|--------------------------------------------|--------------------|
|      | Power consumption : 31.2W                         |                                            | LTH-1000-NL27-DF-I |
|      | Weight : 400g                                     | Warm white (2700K)                         |                    |
|      | Lamp fitting length(L) : 1003mm                   | N100%L27 100% (2640 lm / Ra87)             |                    |
|      | Max. sets connectable : 4m                        | N100%L27 0% (1360 lm / Ra85)               |                    |
|      | Environment : Indoors ( No Condensation )         | N0% L27 100% (1304 lm / Ra83)              |                    |
|      | Attachments : Mounting parts A for THOF (LTH-PTA) |                                            |                    |
|      | Option parts : Power supply cable 500mm for THOF  |                                            |                    |
|      | Dimmable : ○ (Dynamic white)                      |                                            |                    |
|      |                                                   |                                            |                    |

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp>E-mail: [info@luci.co.jp](mailto:info@luci.co.jp)

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ Hong Kong Marketing Office

Korea Office

Shanghai China mainland Regional HQ

Tel: +65-6291-2410

Tel: +852-2219-8462 / Fax: +852-2219-8461

Tel: +82-2-508-2541

Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : [info@luci.co.jp](mailto:info@luci.co.jp)