


Luci

2022.05.13

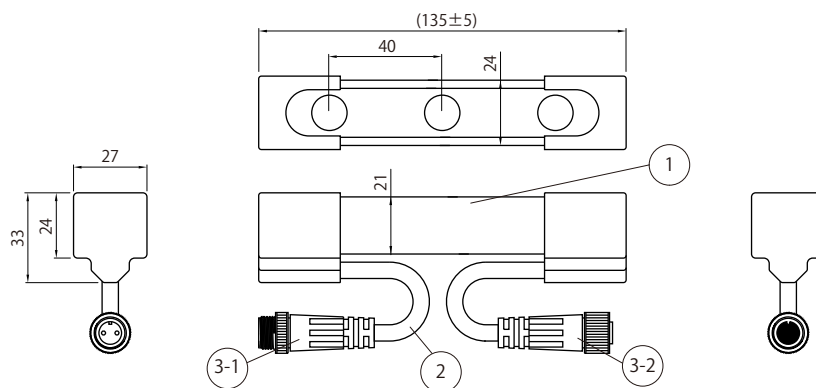


Technical drawing of a metal grate. The top view shows a rectangular grate with a width of 926 and a height of 45. The side view shows a cross-section with a width of 27 and a height of 20. A detail view of the grate's profile is shown on the left, with dimensions 23, 20, and 27. A callout '4' points to the grate's profile.




Technical drawing of a mechanical part. The part is shown in two views: a top view and a front view. The top view is a rectangle with a width of 30 and a height of 10. It features a central circular hole with a diameter of 5. The front view is a rectangle with a height of 30. A callout line points from the top view to the front view, indicating the 5-unit diameter of the hole.

Technical drawing of the connector assembly. The main view shows a cable with a diameter of 15mm and a length of 10000 ± 100mm. The cable is labeled '3-2' and '9'. The connector is labeled 'Red: +' and 'Black: -'. The connector has a diameter of 16mm and a length of 14.5mm. The connector is shown in two views: a side view and a top view. The top view shows a diameter of 12.8mm. A note indicates that the connector cap is attached.

Option Parts:
Joint cable 1000 mm
(CAAD-V1000-MOFO-O)



Accessories for rail & Option Parts:
Adjustable SUS bracket for LVF rail
(LVF-PT-A)(5 pcs/set)

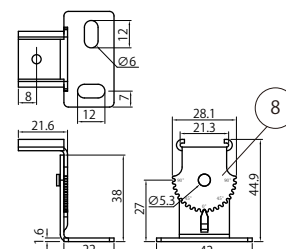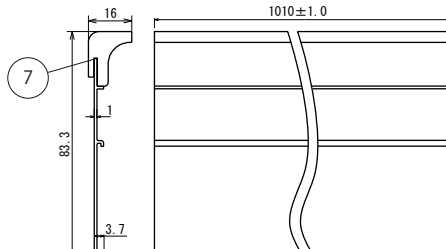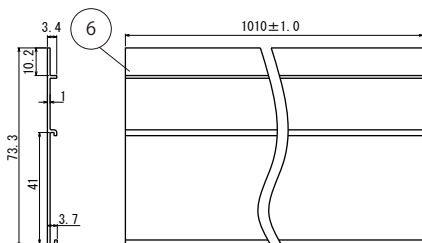

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body			
2	Lead wire			
3-1	Connector			
3-2	Connector			
4	Bendable rail	Aluminum		
5	Mounting Parts	Aluminum		
6	Glare cut shield	Aluminum		
7	Silicone for glare cut shield	Silicone		
8	Adjustable SUS bracket	SUS		
9	Power supply cable (Connector cap)		Red+, Black-	
10	Joint cable			

Spec	Input voltage : DC24V	Max. length : 5m	Light Source color :	Item Number
	Power consumption : 24W/m or 16W/m		Daylight white 6500K : D : 6500K (5800~6400K)	LVF40-0125W-D-SP2/35/50 -O-24/16-W/B/G
	Environment : In & Outdoor, IP67		Natural white 5000K : N : 5000K (4600~5000K)	LVF40-0125W-N-SP2/35/50 -O-24/16-W/B/G
	Operating temperature : -5℃~+45℃		White : W : 4000K (3700~4000K)	LVF40-0125W-W-SP2/35/50 -O-24/16-W/B/G
	Option parts : Bendable rail for Vioxy FLEX, Mounting Parts for Vioxy Flex,		Warm white 3500K : WW : 3500K (3300~3550K)	LVF40-0125W-WW-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield for LVF rail,		Warm white 3000K : L30 : 3000K (2850~3050K)	LVF40-0125W-L30-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield with silicone,		Warm white 2700K : L27 : 2700K (2600~2750K)	LVF40-0125W-L27-SP2/35/50 -O-24/16-W/B/G
	Adjustable SUS bracket for LVF rail,		Warm white 2200K : L22 : 2200K (2000~2300K)	LVF40-0125W-L22-SP2/35/50 -O-24/16-W/B/G
	Power supply cable 10M (Connector cap is attached),			
	Joint cable 1M for UQ FLEX,			

Area/Location/Circuit No.


Length(mm)

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

luci.co.jp

Luci

2022.05.13

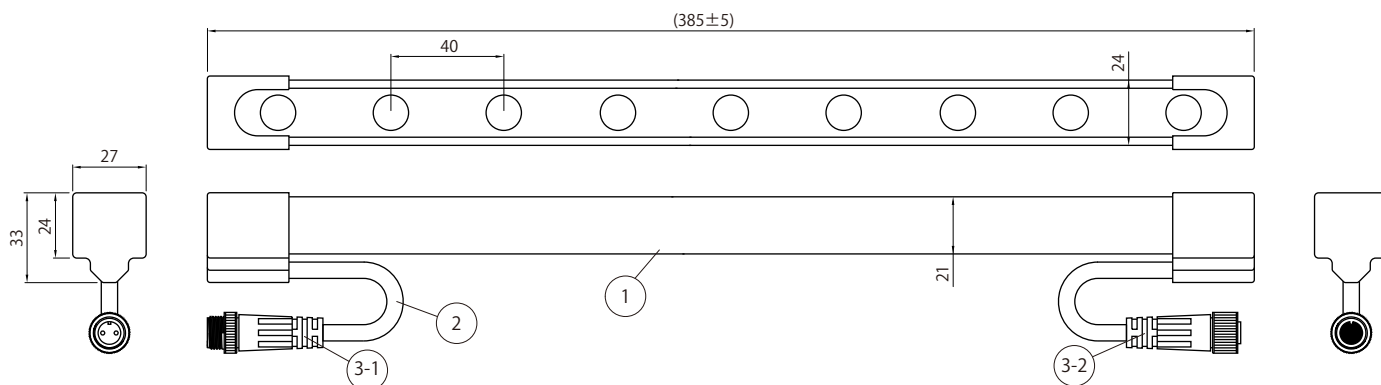

Technical drawing of a window blind slat. The top view shows a slat with a width of 926 and a depth of 23. The side view shows a slat with a height of 45 and a depth of 20. A detail view of the slat's edge shows a width of 20 and a depth of 27. A dimension line indicates a distance of 30 between the slat and the next slat. A dimension line indicates a distance of 4 between the slat and the next slat.

Technical drawing of the connector assembly. The drawing shows a cable with a length of 10000 ± 100 mm and a diameter of $\varnothing 15$ mm. The cable is connected to a connector with a length of 15 mm and a diameter of $\varnothing 14.5$ mm. The connector is labeled "Red: +" and "Black: -". The connector is also labeled "M12" and "16". The connector is shown in two views: a side view and a top view. The top view shows a diameter of $\varnothing 12.8$ mm. The connector is labeled "9".




* Connector cap is attached.

Option Parts:
Joint cable 1000 mm
(CAAD-V1000-MOFO-O)

Technical drawing of a shaft with the following dimensions and callouts:

- Overall length: 1000 ± 15
- Left end diameter: $\Phi 15$
- Left end feature: 3-1
- Right end feature: 3-2
- Right end diameter: 10

Accessories for rail & Option Parts:
Adjustable SUS bracket for LVF rail
(LVF-PT-A)(5 pcs/set)

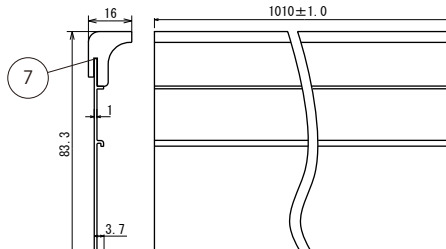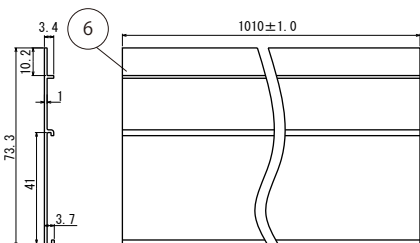

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body			
2	Lead wire			
3-1	Connector			
3-2	Connector			
4	Bendable rail	Aluminum		
5	Mounting Parts	Aluminum		
6	Glare cut shield	Aluminum		
7	Silicone for glare cut shield	Silicone		
8	Adjustable SUS bracket	SUS		
9	Power supply cable (Connector cap)		Red+, Black-	
10	Joint cable			

Spec	Input voltage : DC24V	Max. length : 5m	Light Source color :	Item Number
	Power consumption : 24W/m or 16W/m		Daylight white 6500K : D : 6500K (5800~6400K)	LVF40-0375W-D-SP2/35/50 -O-24/16-W/B/G
	Environment : In & Outdoor, IP67		Natural white 5000K : N : 5000K (4600~5000K)	LVF40-0375W-N-SP2/35/50 -O-24/16-W/B/G
	Operating temperature : -5℃~+45℃		White : W : 4000K (3700~4000K)	LVF40-0375W-W-SP2/35/50 -O-24/16-W/B/G
	Option parts : Bendable rail for Vioxy FLEX, Mounting Parts for Vioxy Flex,		Warm white 3500K : WW : 3500K (3300~3550K)	LVF40-0375W-WW-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield for LVF rail,		Warm white 3000K : L30 : 3000K (2850~3050K)	LVF40-0375W-L30-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield with silicone,		Warm white 2700K : L27 : 2700K (2600~2750K)	LVF40-0375W-L27-SP2/35/50 -O-24/16-W/B/G
	Adjustable SUS bracket for LVF rail,		Warm white 2200K : L22 : 2200K (2000~2300K)	LVF40-0375W-L22-SP2/35/50 -O-24/16-W/B/G
	Power supply cable 10M (Connector cap is attached),			
	Joint cable 1M for UQ FLEX,			

Area/Location/Circuit No.

Length(mm)

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@

luci.co.jp

Vivox series


Luci Vivox FLEX IP67

Luci Vivox FLEX IP67 (24W/m or 16W/m, Both ends lead wire-Side feed)



Luci Pte., Ltd.




2022.05.13

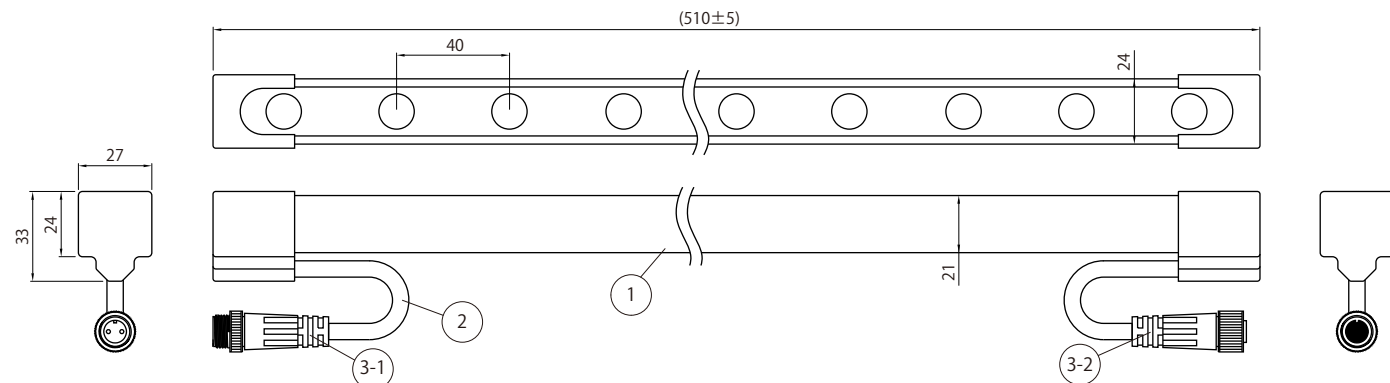


Option Parts:
Bendable rail for Vivox FLEX 1m White/Black/Gray
(LVF-RL1000-AL-W/B/G)

Option Parts:
Mounting Parts for Vivox Flex White/Black/Gray
(LVF-RL0030-AL-W/B/G)(5 pcs/set)

Option Parts:
Power supply cable 10000 mm
(CAAD-V010M-FQNN-O)

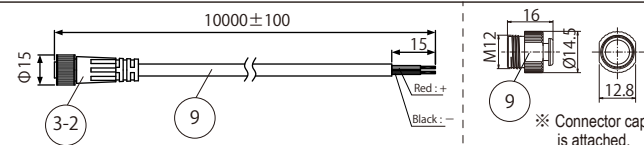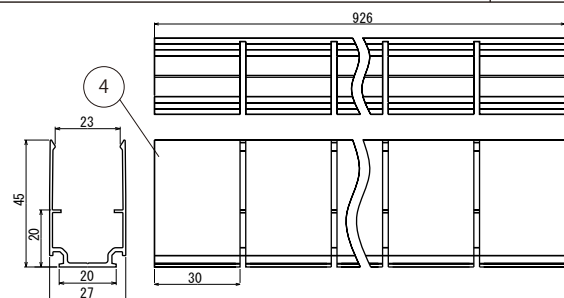




Option Parts:
Joint cable 1000 mm
(CAAD-V100M-MQFQ-O)



Accessories for rail & Option Parts:
Glare cut shield for LVF rail 1m White/Black/Gray
(LVF-GS1000-W/B/G)

Accessories for rail & Option Parts:
Glare cut shield with silicone 1m White/Black/Gray
(LVF-GSS1000-W/B/G)

Accessories for rail & Option Parts:
Adjustable SUS bracket for LVF rail
(LVF-PT-A)(5 pcs/set)

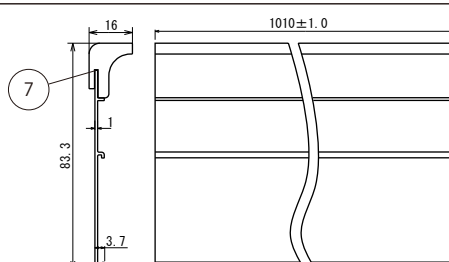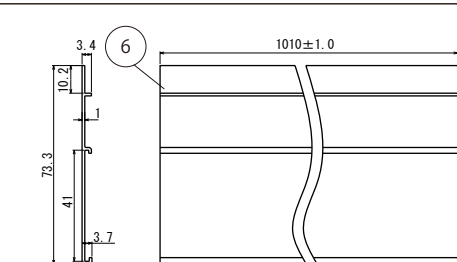

Spec • Rating may be subject to change without announcements.

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body			
2 Lead wire			
3-1 Connector			
3-2 Connector			
4 Bendable rail	Aluminum		
5 Mounting Parts	Aluminum		
6 Glare cut shield	Aluminum		
7 Silicone for glare cut shield	Silicone		
8 Adjustable SUS bracket	SUS		
9 Power supply cable (Connector cap)		Red+, Black-	
10 Joint cable			

Spec	Input voltage : DC24V	Max. length : 5m	Light Source color :	Item Number
Power consumption :	24W/m or 16W/m		Daylight white 6500K : D : 6500K (5800~6400K)	LVF40-0500W-D-SP2/35/50 -O-24/16-W/B/G
Environment :	In & Outdoor, IP67		Natural white 5000K : N : 5000K (4600~5000K)	LVF40-0500W-N-SP2/35/50 -O-24/16-W/B/G
Operating temperature :	-5°C~+45°C		White : W : 4000K (3700~4000K)	LVF40-0500W-W-SP2/35/50 -O-24/16-W/B/G
Option parts :	Bendable rail for Vivox FLEX, Mounting Parts for Vivox Flex,		Warm white 3500K : WW : 3500K (3300~3550K)	LVF40-0500W-WW-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield for LVF rail,		Warm white 3000K : L30 : 3000K (2850~3050K)	LVF40-0500W-L30-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield with silicone,		Warm white 2700K : L27 : 2700K (2600~2750K)	LVF40-0500W-L27-SP2/35/50 -O-24/16-W/B/G
	Adjustable SUS bracket for LVF rail,		Warm white 2200K : L22 : 2200K (2000~2300K)	LVF40-0500W-L22-SP2/35/50 -O-24/16-W/B/G
	Power supply cable 10M (Connector cap is attached),			
	Joint cable 1M for UQ FLEX,			

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)

Luci Pte. Ltd.	http://www.luci.co.jp	E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ	Hong Kong Marketing Office	Korea Office	Shanghai China mainland Regional HQ
Tel: +65-6291-2410	Tel: +852-2219-8462 / Fax: +852-2219-8461	Tel: +82-2-508-2541	Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail: info@luci.co.jp

Vivoxy series


Luci Vivoxy FLEX IP67

Luci Vivoxy FLEX IP67 (24W/m or 16W/m, Both ends lead wire-Side feed)



Luci Pte., Ltd.

2022.05.13

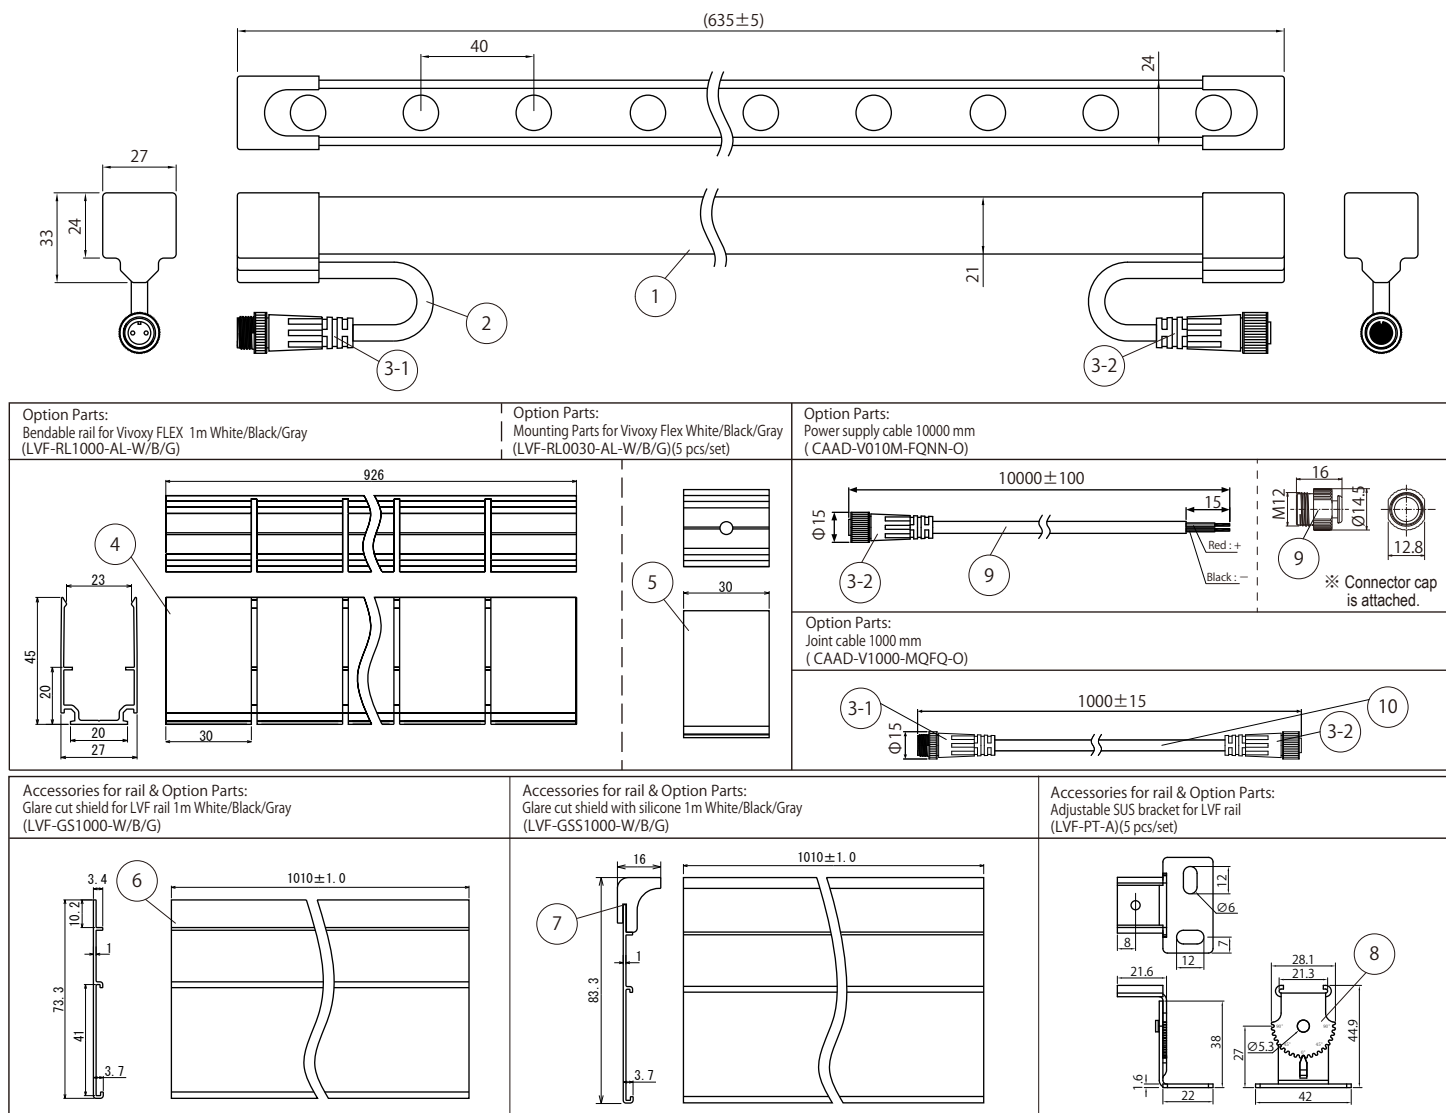

Spec • Rating may be subject to change without announcements. Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body			
2 Lead wire			
3-1 Connector			
3-2 Connector			
4 Bendable rail	Aluminum		
5 Mounting Parts	Aluminum		
6 Glare cut shield	Aluminum		
7 Silicone for glare cut shield	Silicone		
8 Adjustable SUS bracket	SUS		
9 Power supply cable (Connector cap)		Red+, Black-	
10 Joint cable			

Spec	Input voltage : DC24V	Max. length : 5m	Light Source color :	Item Number
Power consumption :	24W/m or 16W/m		Daylight white 6500K : D : 6500K (5800~6400K)	LVF40-0625W-D-SP2/35/50 -O-24/16-W/B/G
Environment :	In & Outdoor, IP67		Natural white 5000K : N : 5000K (4600~5000K)	LVF40-0625W-N-SP2/35/50 -O-24/16-W/B/G
Operating temperature :	-5°C~+45°C		White : W : 4000K (3700~4000K)	LVF40-0625W-W-SP2/35/50 -O-24/16-W/B/G
Option parts :	Bendable rail for Vivoxy FLEX, Mounting Parts for Vivoxy Flex,		Warm white 3500K : WW : 3500K (3300~3550K)	LVF40-0625W-WW-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield for LVF rail,		Warm white 3000K : L30 : 3000K (2850~3050K)	LVF40-0625W-L30-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield with silicone,		Warm white 2700K : L27 : 2700K (2600~2750K)	LVF40-0625W-L27-SP2/35/50 -O-24/16-W/B/G
	Adjustable SUS bracket for LVF rail,		Warm white 2200K : L22 : 2200K (2000~2300K)	LVF40-0625W-L22-SP2/35/50 -O-24/16-W/B/G
	Power supply cable 10M (Connector cap is attached),			
	Joint cable 1M for UQ FLEX,			

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd.

<http://www.luci.co.jp>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410

Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461

Korea Office
Tel: +82-2-508-2541

Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

luci.co.jp

Vivox series


Luci Vivox FLEX IP67

Luci Vivox FLEX IP67 (24W/m or 16W/m, Both ends lead wire-Side feed)



Luci Pte., Ltd.




2022.05.13

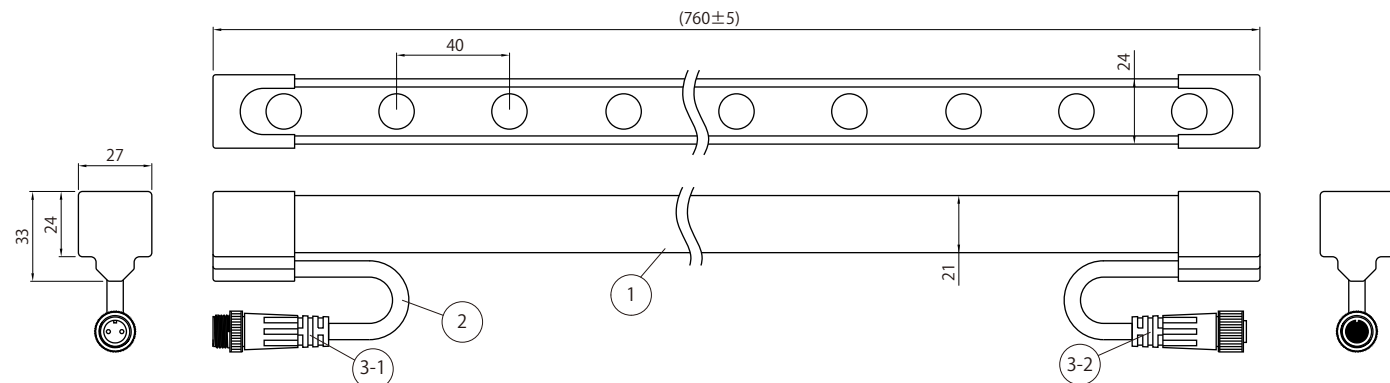


Option Parts:
Bendable rail for Vivox FLEX 1m White/Black/Gray
(LVF-RL1000-AL-W/B/G)

Option Parts:
Mounting Parts for Vivox Flex White/Black/Gray
(LVF-RL0030-AL-W/B/G)(5 pcs/set)

Option Parts:
Power supply cable 10000 mm
(CAAD-V010M-FQNN-O)

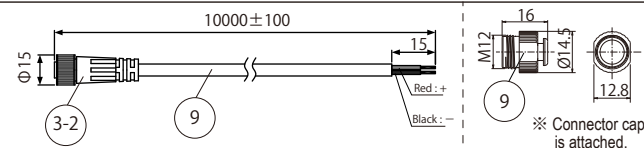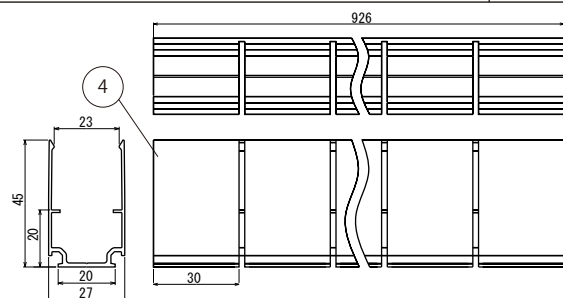




Option Parts:
Joint cable 1000 mm
(CAAD-V100M-MQFQ-O)



Accessories for rail & Option Parts:
Glare cut shield for LVF rail 1m White/Black/Gray
(LVF-GS1000-W/B/G)

Accessories for rail & Option Parts:
Glare cut shield with silicone 1m White/Black/Gray
(LVF-GSS1000-W/B/G)

Accessories for rail & Option Parts:
Adjustable SUS bracket for LVF rail
(LVF-PT-A)(5 pcs/set)

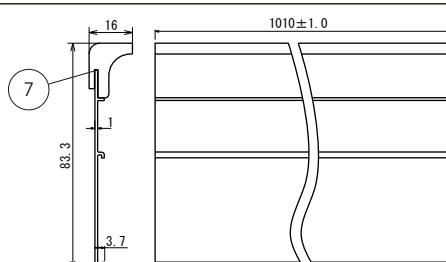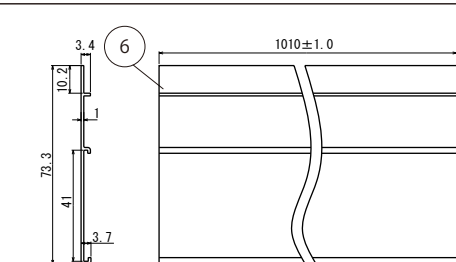

Spec • Rating may be subject to change without announcements.

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body			
2 Lead wire			
3-1 Connector			
3-2 Connector			
4 Bendable rail	Aluminum		
5 Mounting Parts	Aluminum		
6 Glare cut shield	Aluminum		
7 Silicone for glare cut shield	Silicone		
8 Adjustable SUS bracket	SUS		
9 Power supply cable (Connector cap)		Red+, Black-	
10 Joint cable			

Spec	Input voltage : DC24V	Max. length : 5m	Light Source color :	Item Number
Power consumption :	24W/m or 16W/m		Daylight white 6500K : D : 6500K (5800~6400K)	LVF40-0750W-D-SP2/35/50 -O-24/16-W/B/G
Environment :	In & Outdoor, IP67		Natural white 5000K : N : 5000K (4600~5000K)	LVF40-0750W-N-SP2/35/50 -O-24/16-W/B/G
Operating temperature :	-5°C~+45°C		White : W : 4000K (3700~4000K)	LVF40-0750W-W-SP2/35/50 -O-24/16-W/B/G
Option parts :	Bendable rail for Vivox FLEX, Mounting Parts for Vivox Flex,		Warm white 3500K : WW : 3500K (3300~3550K)	LVF40-0750W-WW-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield for LVF rail,		Warm white 3000K : L30 : 3000K (2850~3050K)	LVF40-0750W-L30-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield with silicone,		Warm white 2700K : L27 : 2700K (2600~2750K)	LVF40-0750W-L27-SP2/35/50 -O-24/16-W/B/G
	Adjustable SUS bracket for LVF rail,		Warm white 2200K : L22 : 2200K (2000~2300K)	LVF40-0750W-L22-SP2/35/50 -O-24/16-W/B/G
	Power supply cable 10M (Connector cap is attached),			
	Joint cable 1M for UQ FLEX,			

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)

Luci Pte. Ltd.	http://www.luci.co.jp	E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ	Hong Kong Marketing Office	Korea Office	Shanghai China mainland Regional HQ
Tel: +65-6291-2410	Tel: +852-2219-8462 / Fax: +852-2219-8461	Tel: +82-2-508-2541	Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail: info@luci.co.jp

Vivox series


Luci Vivox FLEX IP67

Luci Vivox FLEX IP67 (24W/m or 16W/m, Both ends lead wire-Side feed)



Luci Pte., Ltd.




2022.05.13

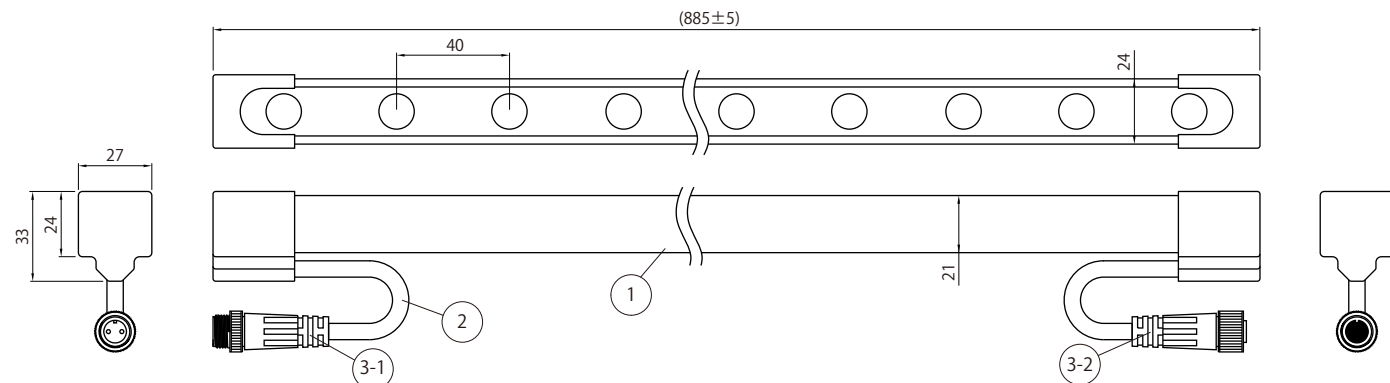


Option Parts:
Bendable rail for Vivox FLEX 1m White/Black/Gray
(LVF-RL1000-AL-W/B/G)

Option Parts:
Mounting Parts for Vivox Flex White/Black/Gray
(LVF-RL0030-AL-W/B/G)(5 pcs/set)

Option Parts:
Power supply cable 10000 mm
(CAAD-V010M-FQNN-O)

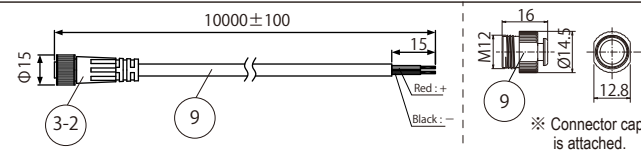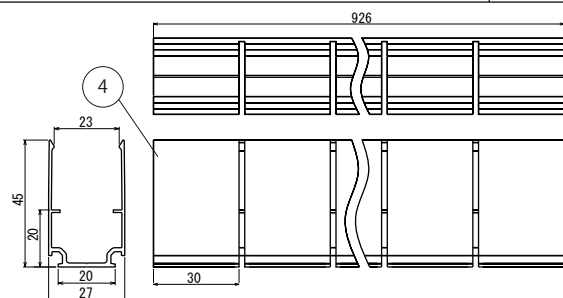




Option Parts:
Joint cable 1000 mm
(CAAD-V100M-MQFQ-O)



Accessories for rail & Option Parts:
Glare cut shield for LVF rail 1m White/Black/Gray
(LVF-GS1000-W/B/G)

Accessories for rail & Option Parts:
Glare cut shield with silicone 1m White/Black/Gray
(LVF-GSS1000-W/B/G)

Accessories for rail & Option Parts:
Adjustable SUS bracket for LVF rail
(LVF-PT-A)(5 pcs/set)

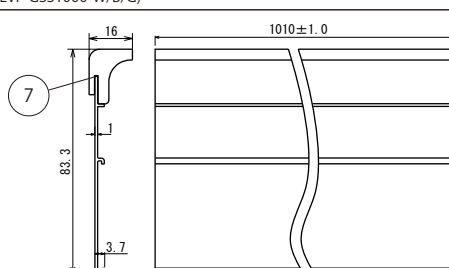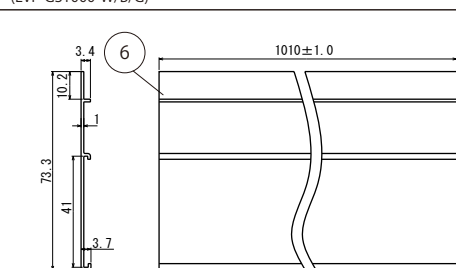

Spec • Rating may be subject to change without announcements.

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body			
2 Lead wire			
3-1 Connector			
3-2 Connector			
4 Bendable rail	Aluminum		
5 Mounting Parts	Aluminum		
6 Glare cut shield	Aluminum		
7 Silicone for glare cut shield	Silicone		
8 Adjustable SUS bracket	SUS		
9 Power supply cable (Connector cap)		Red+, Black-	
10 Joint cable			

Spec	Input voltage : DC24V	Max. length : 5m	Light Source color :	Item Number
Power consumption :	24W/m or 16W/m		Daylight white 6500K : D : 6500K (5800~6400K)	LVF40-0875W-D-SP2/35/50 -O-24/16-W/B/G
Environment :	In & Outdoor, IP67		Natural white 5000K : N : 5000K (4600~5000K)	LVF40-0875W-N-SP2/35/50 -O-24/16-W/B/G
Operating temperature :	-5°C~+45°C		White : W : 4000K (3700~4000K)	LVF40-0875W-W-SP2/35/50 -O-24/16-W/B/G
Option parts :	Bendable rail for Vivox FLEX, Mounting Parts for Vivox Flex,		Warm white 3500K : WW : 3500K (3300~3550K)	LVF40-0875W-WW-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield for LVF rail,		Warm white 3000K : L30 : 3000K (2850~3050K)	LVF40-0875W-L30-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield with silicone,		Warm white 2700K : L27 : 2700K (2600~2750K)	LVF40-0875W-L27-SP2/35/50 -O-24/16-W/B/G
	Adjustable SUS bracket for LVF rail,		Warm white 2200K : L22 : 2200K (2000~2300K)	LVF40-0875W-L22-SP2/35/50 -O-24/16-W/B/G
	Power supply cable 10M (Connector cap is attached),			
	Joint cable 1M for UQ FLEX,			

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410

Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461

Korea Office
Tel: +82-2-508-2541

Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail: info@luci.co.jp

luci.co.jp

Vivoxy series


Luci Vivoxy FLEX IP67

Luci Vivoxy FLEX IP67 (24W/m or 16W/m, Both ends lead wire-Side feed)



Luci Pte., Ltd.

2022.05.13

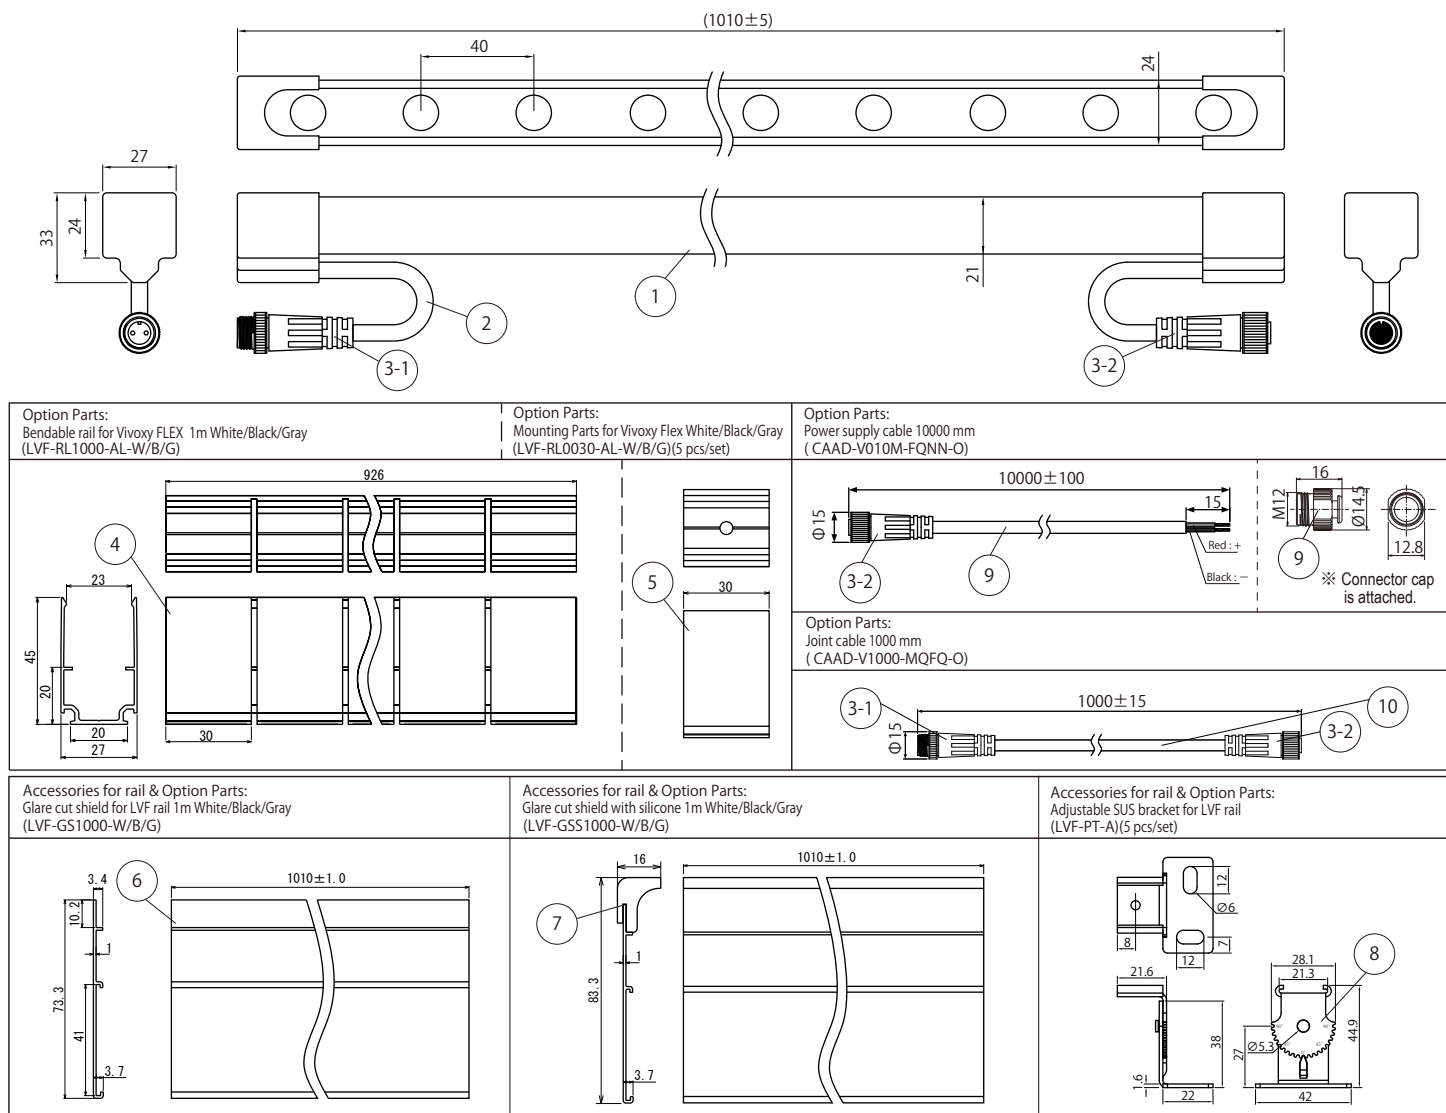

Spec • Rating may be subject to change without announcements. Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body			
2 Lead wire			
3-1 Connector			
3-2 Connector			
4 Bendable rail	Aluminum		
5 Mounting Parts	Aluminum		
6 Glare cut shield	Aluminum		
7 Silicone for glare cut shield	Silicone		
8 Adjustable SUS bracket	SUS		
9 Power supply cable (Connector cap)		Red+, Black-	
10 Joint cable			

Spec	Input voltage : DC24V	Max. length : 5m	Light Source color :	Item Number
Power consumption :	24W/m or 16W/m		Daylight white 6500K : D : 6500K (5800~6400K)	LVF40-1000W-D-SP2/35/50 -O-24/16-W/B/G
Environment :	In & Outdoor, IP67		Natural white 5000K : N : 5000K (4600~5000K)	LVF40-1000W-N-SP2/35/50 -O-24/16-W/B/G
Operating temperature :	-5°C~+45°C		White : W : 4000K (3700~4000K)	LVF40-1000W-W-SP2/35/50 -O-24/16-W/B/G
Option parts :	Bendable rail for Vivoxy FLEX, Mounting Parts for Vivoxy Flex,		Warm white 3500K : WW : 3500K (3300~3550K)	LVF40-1000W-WW-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield for LVF rail,		Warm white 3000K : L30 : 3000K (2850~3050K)	LVF40-1000W-L30-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield with silicone,		Warm white 2700K : L27 : 2700K (2600~2750K)	LVF40-1000W-L27-SP2/35/50 -O-24/16-W/B/G
	Adjustable SUS bracket for LVF rail,		Warm white 2200K : L22 : 2200K (2000~2300K)	LVF40-1000W-L22-SP2/35/50 -O-24/16-W/B/G
	Power supply cable 10M (Connector cap is attached),			
	Joint cable 1M for UQ FLEX,			

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd.

<http://www.luci.co.jp>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410

Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461

Korea Office
Tel: +82-2-508-2541

Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail: info@luci.co.jp

luci.co.jp

Vivoxy series


Luci Vivoxy FLEX IP67

Luci Vivoxy FLEX IP67 (24W/m or 16W/m, Both ends lead wire-Side feed)



Luci Pte., Ltd.

2022.05.13

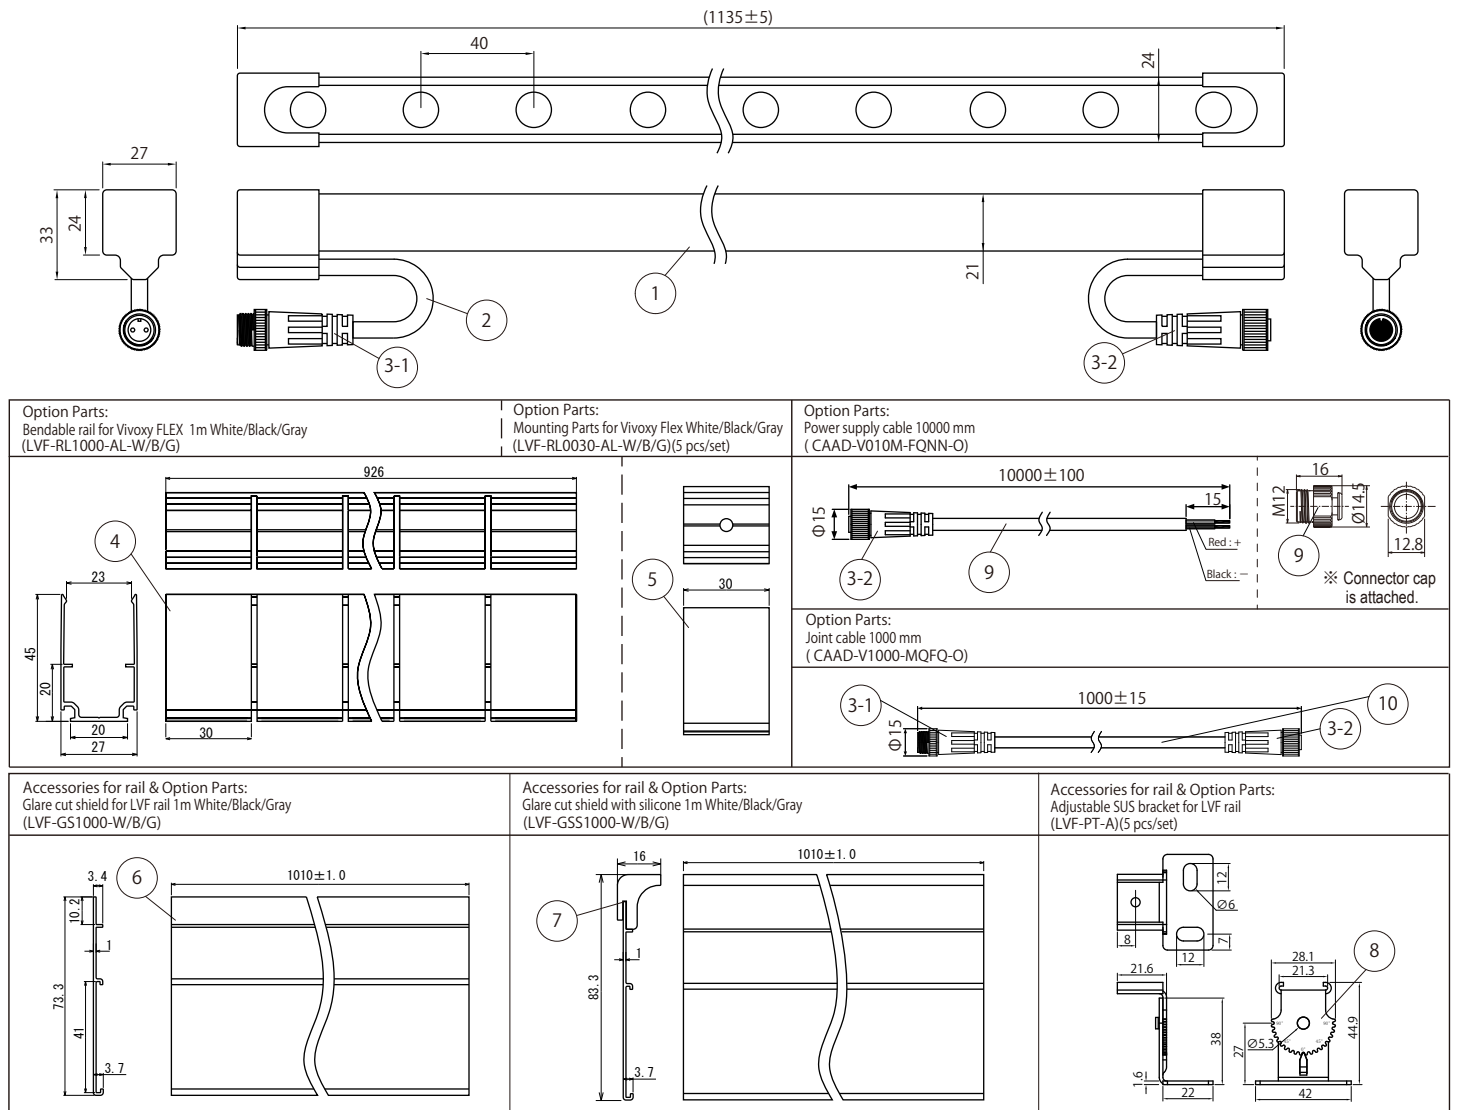

Spec · Rating may be subject to change without announcements.

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body			
2 Lead wire			
3-1 Connector			
3-2 Connector			
4 Bendable rail	Aluminum		
5 Mounting Parts	Aluminum		
6 Glare cut shield	Aluminum		
7 Silicone for glare cut shield	Silicone		
8 Adjustable SUS bracket	SUS		
9 Power supply cable (Connector cap)		Red+, Black-	
10 Joint cable			

Spec	Input voltage : DC24V	Max. length : 5m	Light Source color :	Item Number
Power consumption :	24W/m or 16W/m		Daylight white 6500K : D : 6500K (5800~6400K)	LVF40-1125W-D-SP2/35/50 -O-24/16-W/B/G
Environment :	In & Outdoor, IP67		Natural white 5000K : N : 5000K (4600~5000K)	LVF40-1125W-N-SP2/35/50 -O-24/16-W/B/G
Operating temperature :	-5°C~+45°C		White : W : 4000K (3700~4000K)	LVF40-1125W-W-SP2/35/50 -O-24/16-W/B/G
Option parts :	Bendable rail for Vivoxy FLEX, Mounting Parts for Vivoxy Flex,		Warm white 3500K : WW : 3500K (3300~3550K)	LVF40-1125W-WW-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield for LVF rail,		Warm white 3000K : L30 : 3000K (2850~3050K)	LVF40-1125W-L30-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield with silicone,		Warm white 2700K : L27 : 2700K (2600~2750K)	LVF40-1125W-L27-SP2/35/50 -O-24/16-W/B/G
	Adjustable SUS bracket for LVF rail,		Warm white 2200K : L22 : 2200K (2000~2300K)	LVF40-1125W-L22-SP2/35/50 -O-24/16-W/B/G
	Power supply cable 10M (Connector cap is attached),			
	Joint cable 1M for UQ FLEX,			

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd.

<http://www.luci.co.jp>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410

Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461

Korea Office
Tel: +82-2-508-2541

Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

luci.co.jp

Vivoxy series


Luci Vivoxy FLEX IP67

Luci Vivoxy FLEX IP67 (24W/m or 16W/m, Both ends lead wire-Side feed)



Luci Pte., Ltd.

2022.05.13

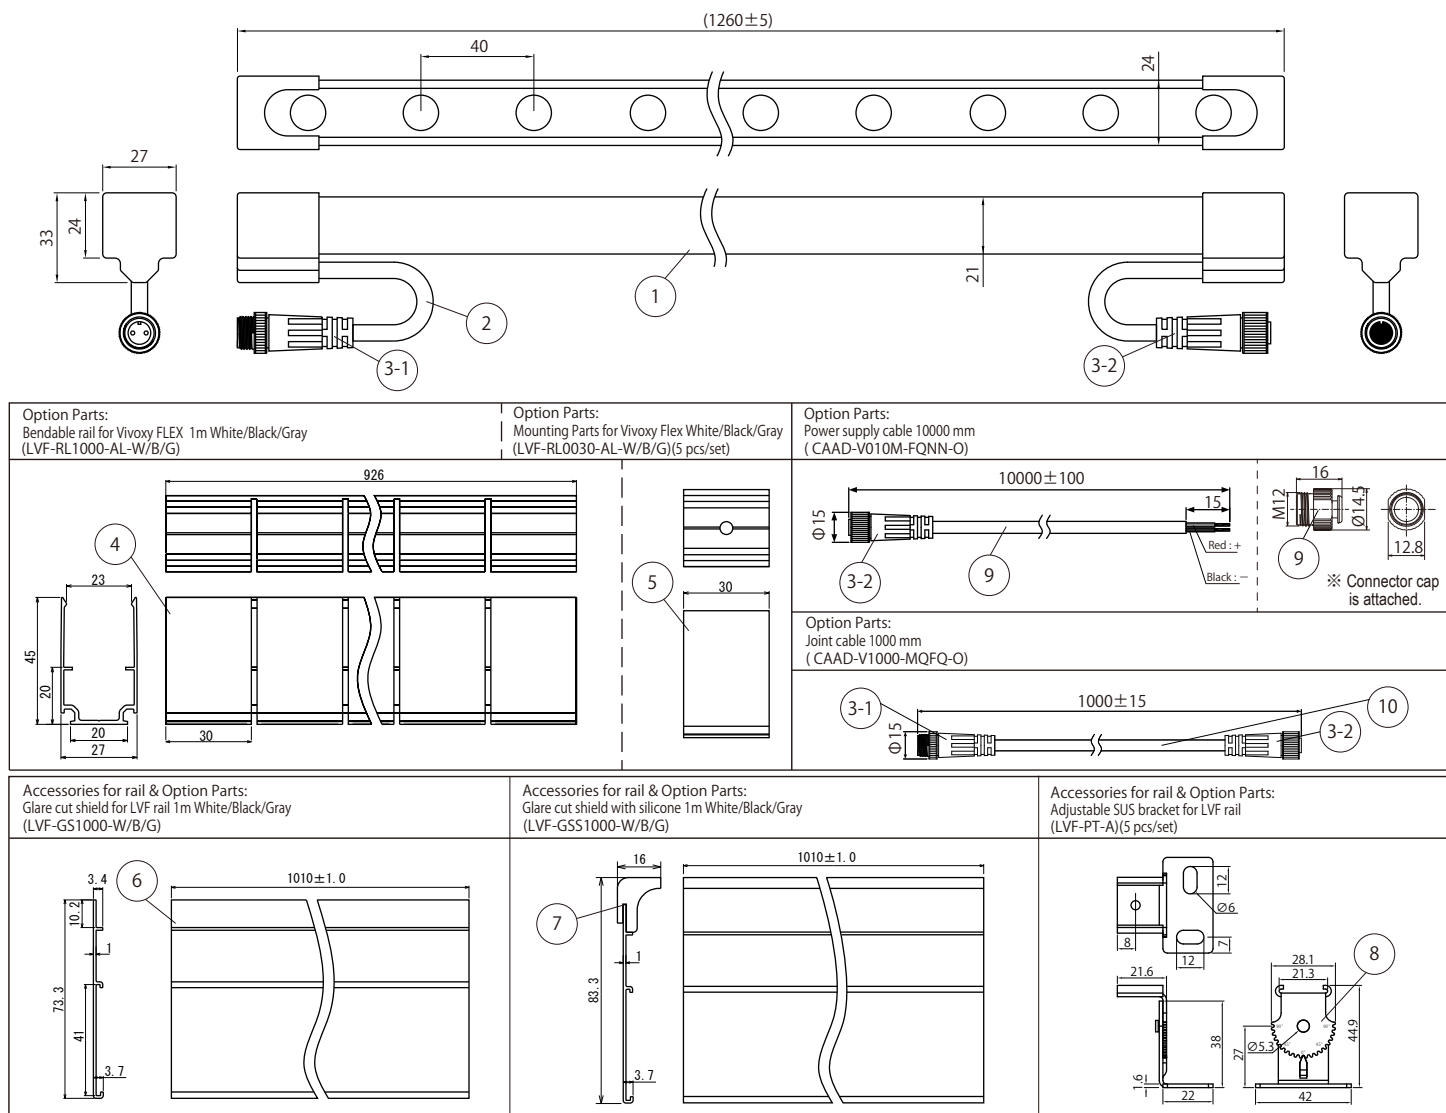

Spec・Rating may be subject to change without announcements.

Unit Of Measure : mm

	Part Name	Material	Note	Drawing
1	Body			
2	Lead wire			
3-1	Connector			
3-2	Connector			
4	Bendable rail	Aluminum		
5	Mounting Parts	Aluminum		
6	Glare cut shield	Aluminum		
7	Silicone for glare cut shield	Silicone		
8	Adjustable SUS bracket	SUS		
9	Power supply cable (Connector cap)		Red+, Black-	
10	Joint cable			

Spec	Input voltage : DC24V	Max. length : 5m	Light Source color :	Item Number
	Power consumption : 24W/m or 16W/m		Daylight white 6500K : D : 6500K (5800~6400K)	LVF40-1250W-D-SP2/35/50-O-24/16-W/B/G
	Environment : In & Outdoor, IP67		Natural white 5000K : N : 5000K (4600~5000K)	LVF40-1250W-N-SP2/35/50-O-24/16-W/B/G
	Operating temperature : -5°C~+45°C		White : W : 4000K (3700~4000K)	LVF40-1250W-W-SP2/35/50-O-24/16-W/B/G
	Option parts : Bendable rail for Vivoxy FLEX, Mounting Parts for Vivoxy Flex,		Warm white 3500K : WW : 3500K (3300~3550K)	LVF40-1250W-WW-SP2/35/50-O-24/16-W/B/G
	Glare cut shield for LVF rail,		Warm white 3000K : L30 : 3000K (2850~3050K)	LVF40-1250W-L30-SP2/35/50-O-24/16-W/B/G
	Glare cut shield with silicone,		Warm white 2700K : L27 : 2700K (2600~2750K)	LVF40-1250W-L27-SP2/35/50-O-24/16-W/B/G
	Adjustable SUS bracket for LVF rail,		Warm white 2200K : L22 : 2200K (2000~2300K)	LVF40-1250W-L22-SP2/35/50-O-24/16-W/B/G
	Power supply cable 10M (Connector cap is attached),			
	Joint cable 1M for UQ FLEX,			

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd.

<http://www.luci.co.jp>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410

Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461

Korea Office
Tel: +82-2-508-2541

Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail: info@luci.co.jp

luci.co.jp

Vivoxy series


Luci Vivoxy FLEX IP67

Luci Vivoxy FLEX IP67 (24W/m or 16W/m, Both ends lead wire-Side feed)



Luci Pte., Ltd.

2022.05.13

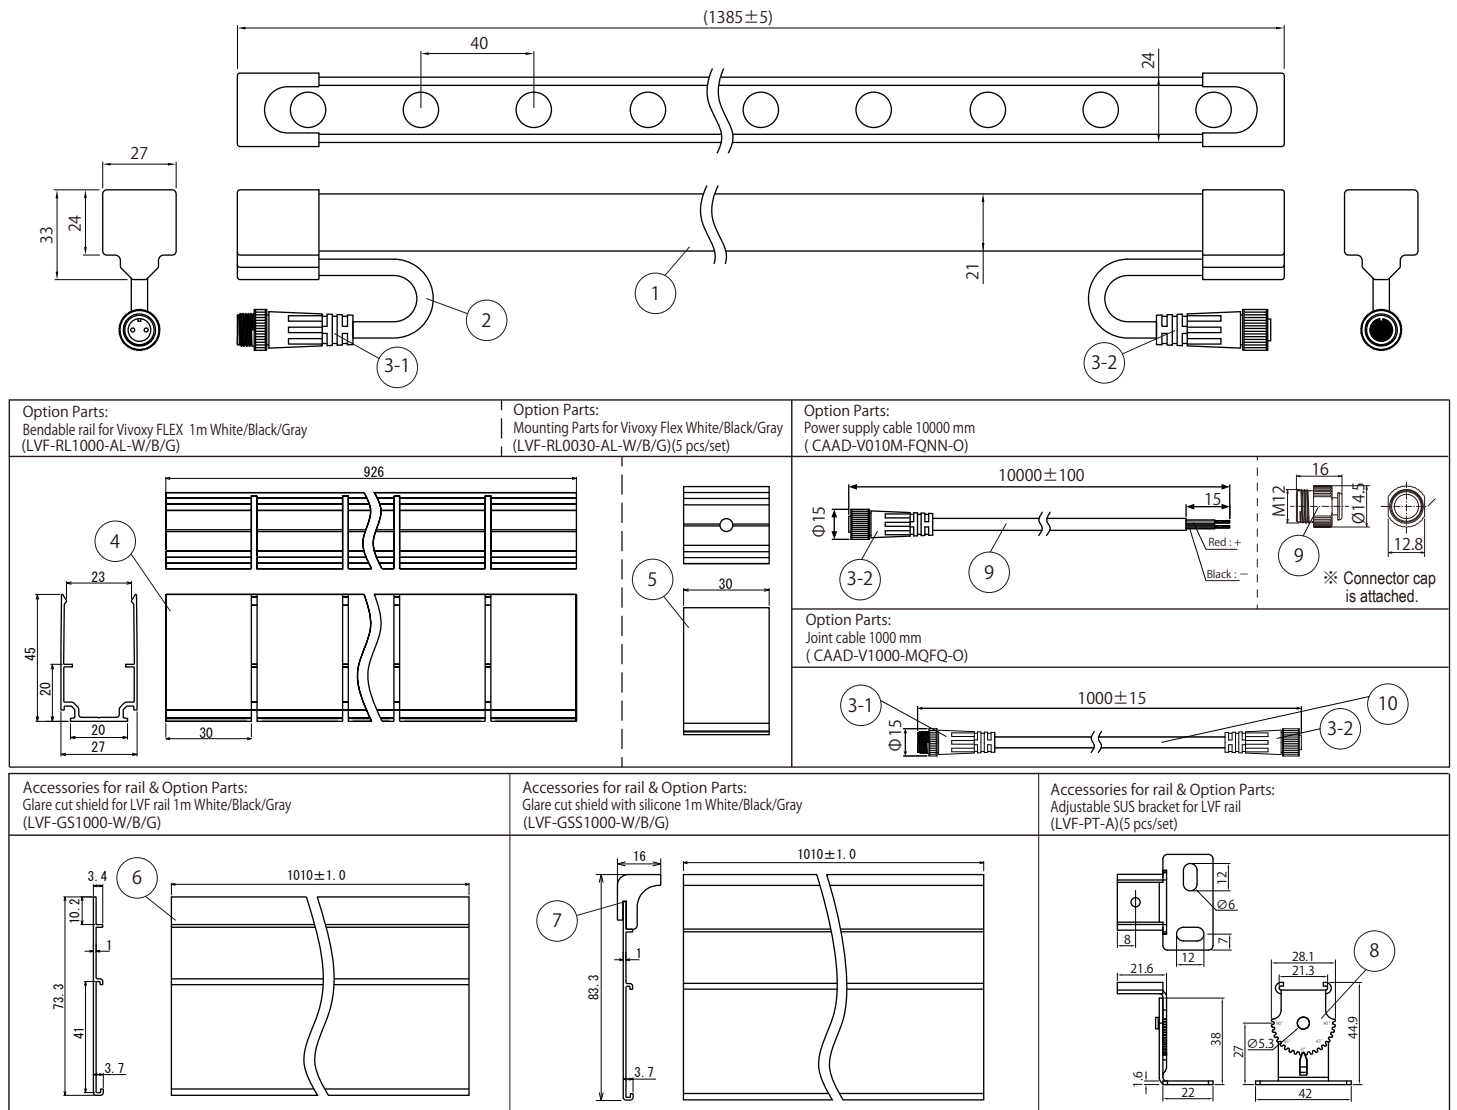

Spec • Rating may be subject to change without announcements. Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body			
2 Lead wire			
3-1 Connector			
3-2 Connector			
4 Bendable rail	Aluminum		
5 Mounting Parts	Aluminum		
6 Glare cut shield	Aluminum		
7 Silicone for glare cut shield	Silicone		
8 Adjustable SUS bracket	SUS		
9 Power supply cable (Connector cap)		Red+, Black-	
10 Joint cable			

Spec	Input voltage : DC24V	Max. length : 5m	Light Source color :	Item Number
Power consumption :	24W/m or 16W/m		Daylight white 6500K : D : 6500K (5800~6400K)	LVF40-1375W-D-SP2/35/50 -O-24/16-W/B/G
Environment :	In & Outdoor, IP67		Natural white 5000K : N : 5000K (4600~5000K)	LVF40-1375W-N-SP2/35/50 -O-24/16-W/B/G
Operating temperature :	-5°C~+45°C		White : W : 4000K (3700~4000K)	LVF40-1375W-W-SP2/35/50 -O-24/16-W/B/G
Option parts :	Bendable rail for Vivoxy FLEX, Mounting Parts for Vivoxy Flex,		Warm white 3500K : WW : 3500K (3300~3550K)	LVF40-1375W-WW-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield for LVF rail,		Warm white 3000K : L30 : 3000K (2850~3050K)	LVF40-1375W-L30-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield with silicone,		Warm white 2700K : L27 : 2700K (2600~2750K)	LVF40-1375W-L27-SP2/35/50 -O-24/16-W/B/G
	Adjustable SUS bracket for LVF rail,		Warm white 2200K : L22 : 2200K (2000~2300K)	LVF40-1375W-L22-SP2/35/50 -O-24/16-W/B/G
	Power supply cable 10M (Connector cap is attached),			
	Joint cable 1M for UQ FLEX,			

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)
Luci Pte. Ltd. http://www.luci.co.jp E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ Tel: +65-6291-2410	Hong Kong Marketing Office Tel: +852-2219-8462 / Fax: +852-2219-8461
Korea Office Tel: +82-2-508-2541	Shanghai China mainland Regional HQ Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

Vivox series


Luci Vivox FLEX IP67

Luci Vivox FLEX IP67 (24W/m or 16W/m, Both ends lead wire-Side feed)



Luci Pte., Ltd.




2022.05.13

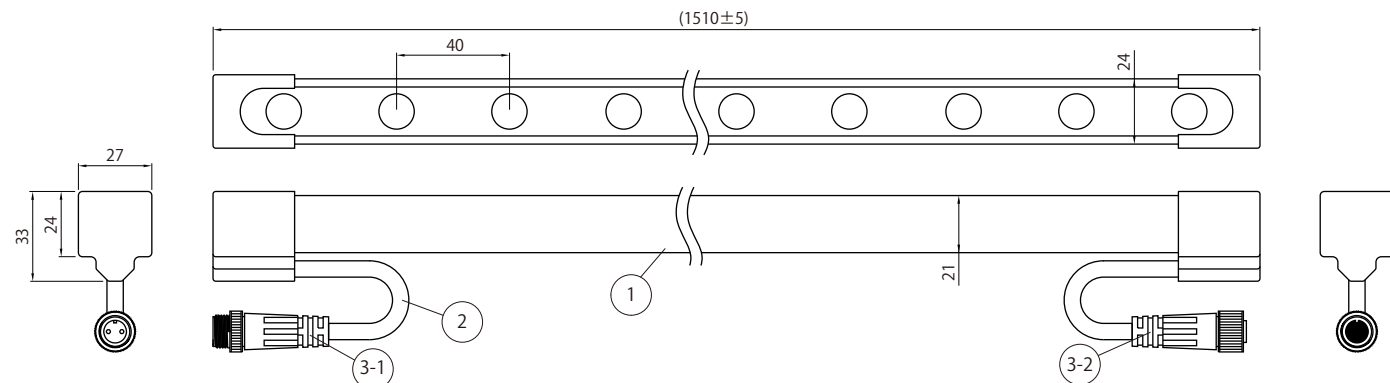

Option Parts:
Bendable rail for Vivox FLEX 1m White/Black/Gray
(LVF-RL1000-AL-W/B/G)

Option Parts:
Mounting Parts for Vivox Flex White/Black/Gray
(LVF-RL0030-AL-W/B/G)(5 pcs/set)

Option Parts:
Power supply cable 10000 mm
(CAAD-V010M-FQNN-O)

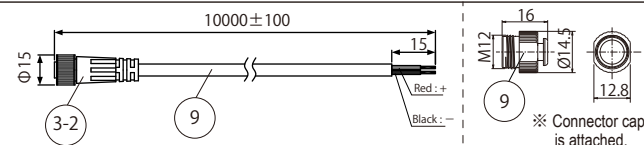

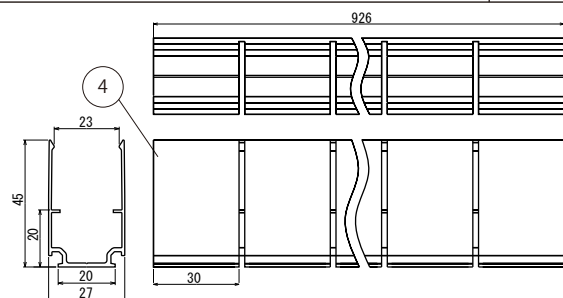


Option Parts:
Joint cable 1000 mm
(CAAD-V100M-MQFQ-O)

Accessories for rail & Option Parts:
Glare cut shield for LVF rail 1m White/Black/Gray
(LVF-GS1000-W/B/G)

Accessories for rail & Option Parts:
Glare cut shield with silicone 1m White/Black/Gray
(LVF-GSS1000-W/B/G)

Accessories for rail & Option Parts:
Adjustable SUS bracket for LVF rail
(LVF-PT-A)(5 pcs/set)

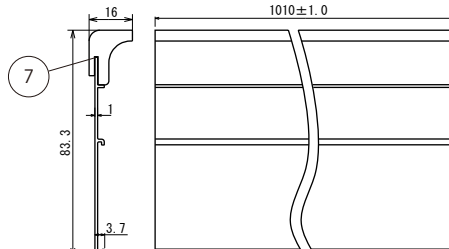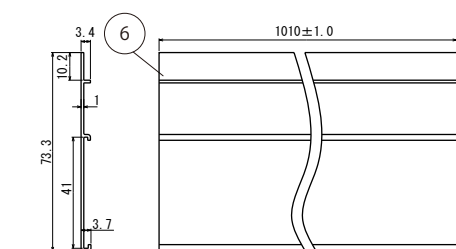

Spec • Rating may be subject to change without announcements.

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body			
2 Lead wire			
3-1 Connector			
3-2 Connector			
4 Bendable rail	Aluminum		
5 Mounting Parts	Aluminum		
6 Glare cut shield	Aluminum		
7 Silicone for glare cut shield	Silicone		
8 Adjustable SUS bracket	SUS		
9 Power supply cable (Connector cap)		Red+, Black-	
10 Joint cable			

Spec	Input voltage : DC24V	Max. length : 5m	Light Source color :	Item Number
Power consumption :	24W/m or 16W/m		Daylight white 6500K : D : 6500K (5800~6400K)	LVF40-1500W-D-SP2/35/50 -O-24/16-W/B/G
Environment :	In & Outdoor, IP67		Natural white 5000K : N : 5000K (4600~5000K)	LVF40-1500W-N-SP2/35/50 -O-24/16-W/B/G
Operating temperature :	-5°C~+45°C		White : W : 4000K (3700~4000K)	LVF40-1500W-W-SP2/35/50 -O-24/16-W/B/G
Option parts :	Bendable rail for Vivox FLEX, Mounting Parts for Vivox Flex,		Warm white 3500K : WW : 3500K (3300~3550K)	LVF40-1500W-WW-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield for LVF rail,		Warm white 3000K : L30 : 3000K (2850~3050K)	LVF40-1500W-L30-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield with silicone,		Warm white 2700K : L27 : 2700K (2600~2750K)	LVF40-1500W-L27-SP2/35/50 -O-24/16-W/B/G
	Adjustable SUS bracket for LVF rail,		Warm white 2200K : L22 : 2200K (2000~2300K)	LVF40-1500W-L22-SP2/35/50 -O-24/16-W/B/G
	Power supply cable 10M (Connector cap is attached),			
	Joint cable 1M for UQ FLEX,			

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)

Luci Pte. Ltd.	http://www.luci.co.jp	E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ	Hong Kong Marketing Office	Korea Office	Shanghai China mainland Regional HQ
Tel: +65-6291-2410	Tel: +852-2219-8462 / Fax: +852-2219-8461	Tel: +82-2-508-2541	Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

Vivoxy series


Luci Vivoxy FLEX IP67

Luci Vivoxy FLEX IP67 (24W/m or 16W/m, Both ends lead wire-Side feed)



Luci Pte., Ltd.

2022.05.13

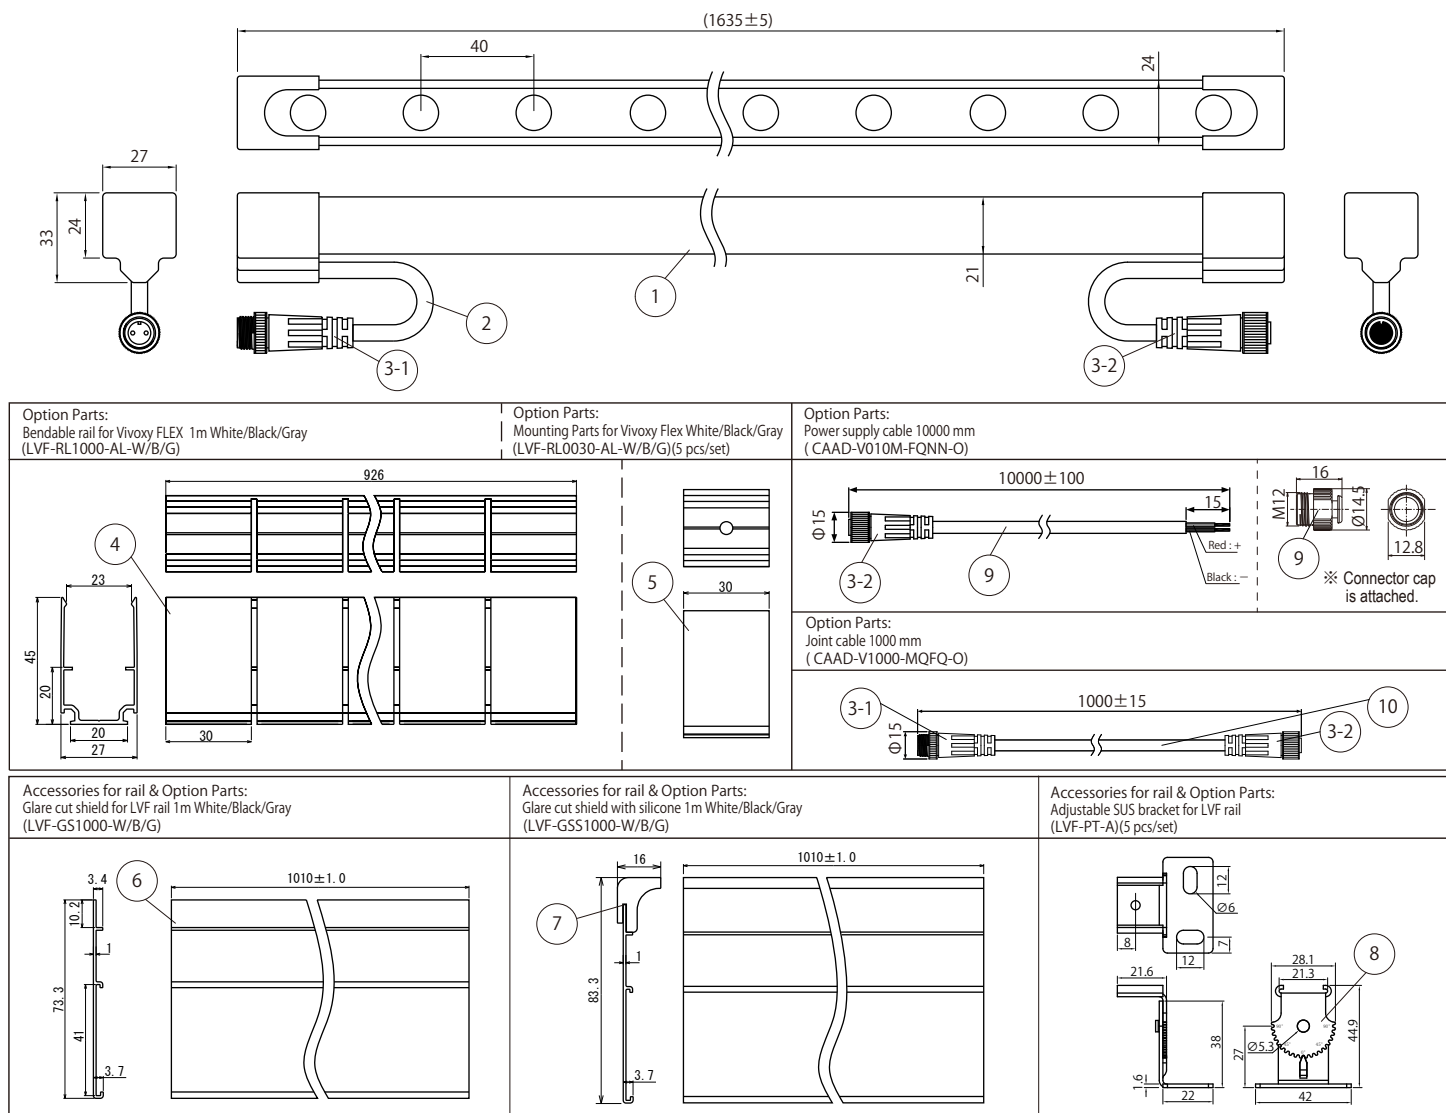

Spec • Rating may be subject to change without announcements. Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body			
2 Lead wire			
3-1 Connector			
3-2 Connector			
4 Bendable rail	Aluminum		
5 Mounting Parts	Aluminum		
6 Glare cut shield	Aluminum		
7 Silicone for glare cut shield	Silicone		
8 Adjustable SUS bracket	SUS		
9 Power supply cable (Connector cap)		Red+, Black-	
10 Joint cable			

Spec	Input voltage : DC24V	Max. length : 5m	Light Source color :	Item Number
Power consumption :	24W/m or 16W/m		Daylight white 6500K : D : 6500K (5800~6400K)	LVF40-1625W-D-SP2/35/50 -O-24/16-W/B/G
Environment :	In & Outdoor, IP67		Natural white 5000K : N : 5000K (4600~5000K)	LVF40-1625W-N-SP2/35/50 -O-24/16-W/B/G
Operating temperature :	-5°C~+45°C		White : W : 4000K (3700~4000K)	LVF40-1625W-W-SP2/35/50 -O-24/16-W/B/G
Option parts :	Bendable rail for Vivoxy FLEX, Mounting Parts for Vivoxy Flex,		Warm white 3500K : WW : 3500K (3300~3550K)	LVF40-1625W-WW-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield for LVF rail,		Warm white 3000K : L30 : 3000K (2850~3050K)	LVF40-1625W-L30-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield with silicone,		Warm white 2700K : L27 : 2700K (2600~2750K)	LVF40-1625W-L27-SP2/35/50 -O-24/16-W/B/G
	Adjustable SUS bracket for LVF rail,		Warm white 2200K : L22 : 2200K (2000~2300K)	LVF40-1625W-L22-SP2/35/50 -O-24/16-W/B/G
	Power supply cable 10M (Connector cap is attached),			
	Joint cable 1M for UQ FLEX,			

Job/Project Name	Area/Location/Circuit No.		
Product Code	Qty.	Length(mm)	
Luci Pte. Ltd.	http://www.luci.co.jp	E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ	Hong Kong Marketing Office	Korea Office	Shanghai China mainland Regional HQ
Tel: +65-6291-2410	Tel: +852-2219-8462 / Fax: +852-2219-8461	Tel: +82-2-508-2541	Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

Vivoxo series


Luci Vivoxo FLEX IP67

Luci Vivoxo FLEX IP67 (24W/m or 16W/m, Both ends lead wire-Side feed)



Luci Pte., Ltd.




2022.05.13

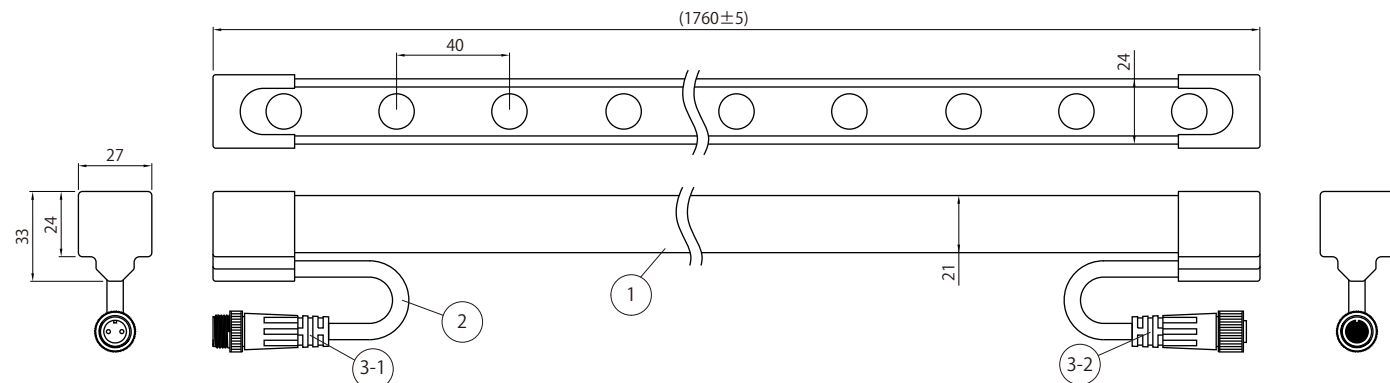


Option Parts:
Bendable rail for Vivoxo FLEX 1m White/Black/Gray
(LVF-RL1000-AL-W/B/G)

Option Parts:
Mounting Parts for Vivoxo Flex White/Black/Gray
(LVF-RL0030-AL-W/B/G)(5 pcs/set)

Option Parts:
Power supply cable 10000 mm
(CAAD-V010M-FQNN-O)

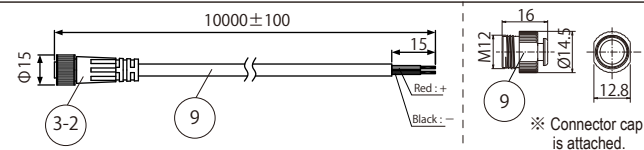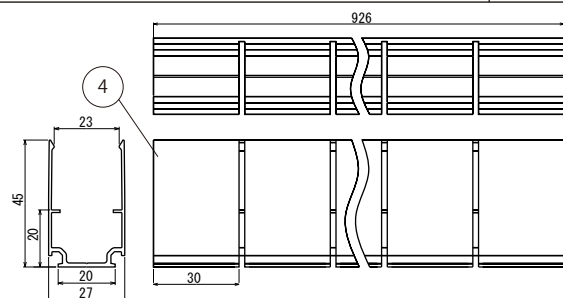




Option Parts:
Joint cable 1000 mm
(CAAD-V100M-MQFQ-O)



Accessories for rail & Option Parts:
Glare cut shield for LVF rail 1m White/Black/Gray
(LVF-GS1000-W/B/G)

Accessories for rail & Option Parts:
Glare cut shield with silicone 1m White/Black/Gray
(LVF-GSS1000-W/B/G)

Accessories for rail & Option Parts:
Adjustable SUS bracket for LVF rail
(LVF-PT-A)(5 pcs/set)

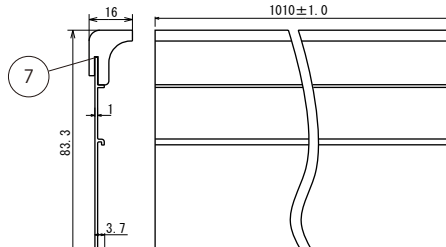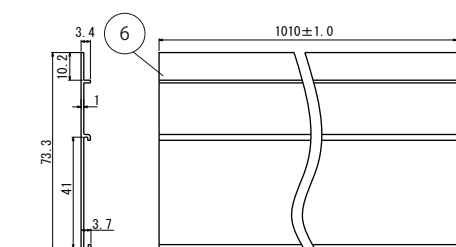

Spec • Rating may be subject to change without announcements.

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body			
2 Lead wire			
3-1 Connector			
3-2 Connector			
4 Bendable rail	Aluminum		
5 Mounting Parts	Aluminum		
6 Glare cut shield	Aluminum		
7 Silicone for glare cut shield	Silicone		
8 Adjustable SUS bracket	SUS		
9 Power supply cable (Connector cap)		Red+, Black-	
10 Joint cable			

Spec	Input voltage : DC24V	Max. length : 5m	Light Source color :	Item Number
Power consumption :	24W/m or 16W/m		Daylight white 6500K : D : 6500K (5800~6400K)	LVF40-1750W-D-SP2/35/50 -O-24/16-W/B/G
Environment :	In & Outdoor, IP67		Natural white 5000K : N : 5000K (4600~5000K)	LVF40-1750W-N-SP2/35/50 -O-24/16-W/B/G
Operating temperature :	-5°C~+45°C		White : W : 4000K (3700~4000K)	LVF40-1750W-W-SP2/35/50 -O-24/16-W/B/G
Option parts :	Bendable rail for Vivoxo FLEX, Mounting Parts for Vivoxo Flex,		Warm white 3500K : WW : 3500K (3300~3550K)	LVF40-1750W-WW-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield for LVF rail,		Warm white 3000K : L30 : 3000K (2850~3050K)	LVF40-1750W-L30-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield with silicone,		Warm white 2700K : L27 : 2700K (2600~2750K)	LVF40-1750W-L27-SP2/35/50 -O-24/16-W/B/G
	Adjustable SUS bracket for LVF rail,		Warm white 2200K : L22 : 2200K (2000~2300K)	LVF40-1750W-L22-SP2/35/50 -O-24/16-W/B/G
	Power supply cable 10M (Connector cap is attached),			
	Joint cable 1M for UQ FLEX,			

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd.

<http://www.luci.co.jp>

E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410

Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461

Korea Office
Tel: +82-2-508-2541

Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail: info@luci.co.jp

luci.co.jp

Vivox series


Luci Vivox FLEX IP67

Luci Vivox FLEX IP67 (24W/m or 16W/m, Both ends lead wire-Side feed)



Luci Pte., Ltd.

2022.05.13

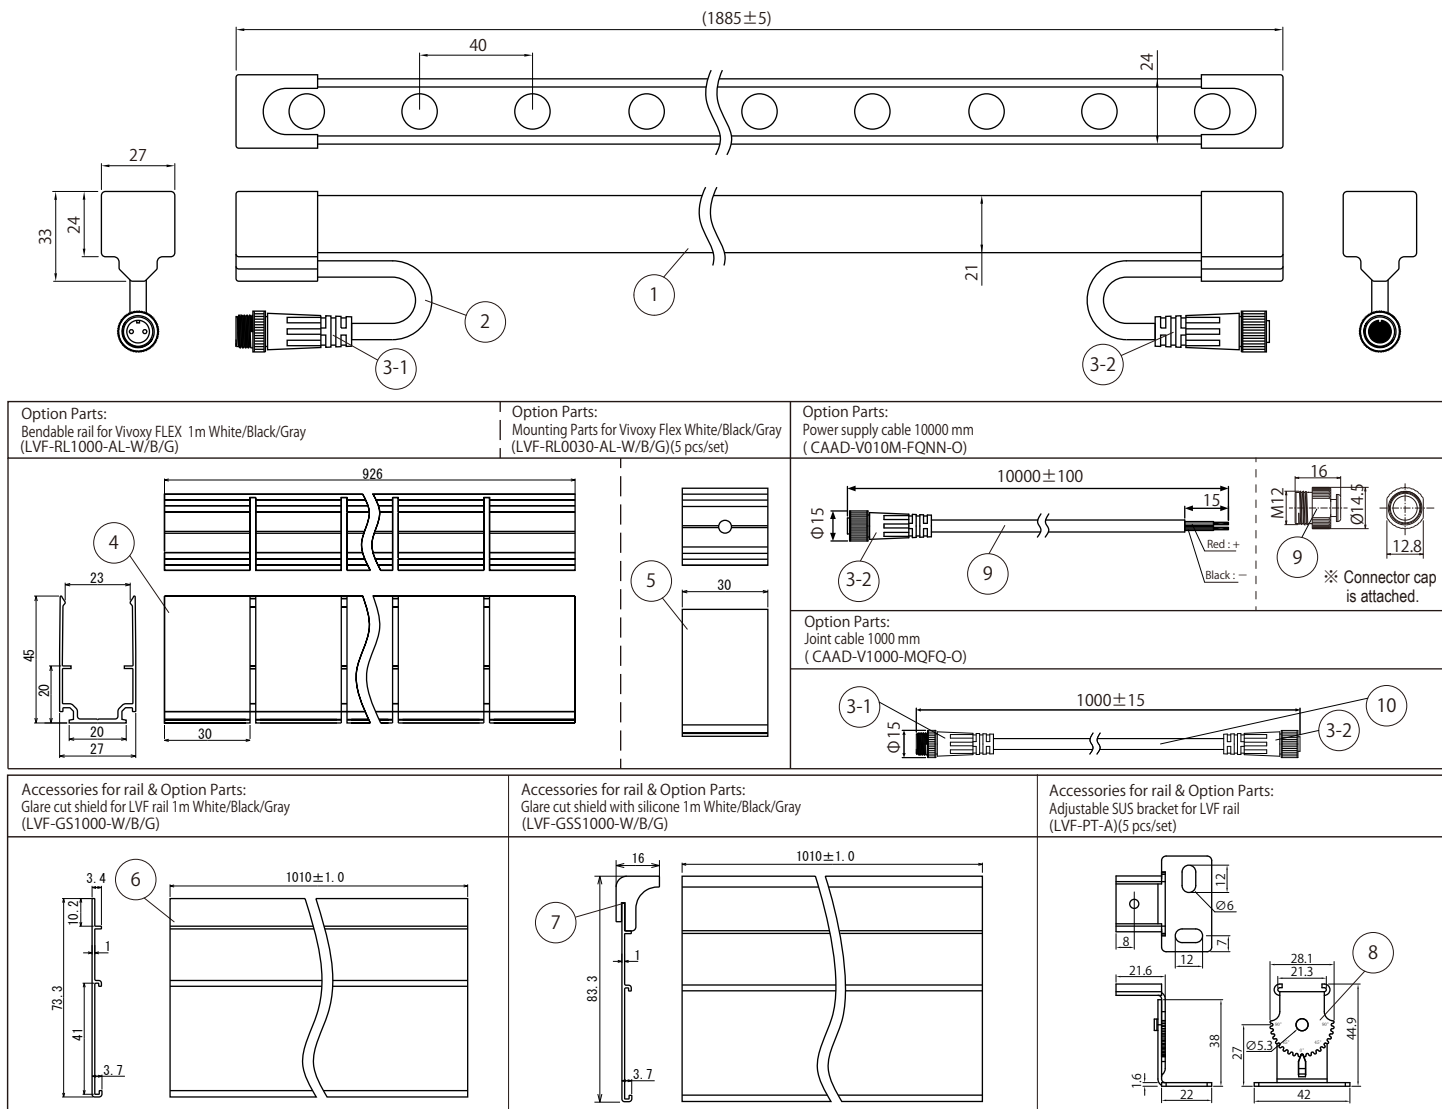

Spec • Rating may be subject to change without announcements.

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body			
2 Lead wire			
3-1 Connector			
3-2 Connector			
4 Bendable rail	Aluminum		
5 Mounting Parts	Aluminum		
6 Glare cut shield	Aluminum		
7 Silicone for glare cut shield	Silicone		
8 Adjustable SUS bracket	SUS		
9 Power supply cable (Connector cap)		Red+, Black-	
10 Joint cable			

Spec	Input voltage : DC24V	Max. length : 5m	Light Source color :	Item Number
Power consumption :	24W/m or 16W/m		Daylight white 6500K : D : 6500K (5800~6400K)	LVF40-1875W-D-SP2/35/50 -O-24/16-W/B/G
Environment :	In & Outdoor, IP67		Natural white 5000K : N : 5000K (4600~5000K)	LVF40-1875W-N-SP2/35/50 -O-24/16-W/B/G
Operating temperature :	-5°C~+45°C		White : W : 4000K (3700~4000K)	LVF40-1875W-W-SP2/35/50 -O-24/16-W/B/G
Option parts :	Bendable rail for Vivox FLEX, Mounting Parts for Vivox Flex,		Warm white 3500K : WW : 3500K (3300~3550K)	LVF40-1875W-WW-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield for LVF rail,		Warm white 3000K : L30 : 3000K (2850~3050K)	LVF40-1875W-L30-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield with silicone,		Warm white 2700K : L27 : 2700K (2600~2750K)	LVF40-1875W-L27-SP2/35/50 -O-24/16-W/B/G
	Adjustable SUS bracket for LVF rail,		Warm white 2200K : L22 : 2200K (2000~2300K)	LVF40-1875W-L22-SP2/35/50 -O-24/16-W/B/G
	Power supply cable 10M (Connector cap is attached),			
	Joint cable 1M for UQ FLEX,			

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)
Luci Pte. Ltd. http://www.luci.co.jp E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ Tel: +65-6291-2410	Hong Kong Marketing Office Tel: +852-2219-8462 / Fax: +852-2219-8461
	Korea Office Tel: +82-2-508-2541
	Shanghai China mainland Regional HQ Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

Vivox series


Luci Vivox FLEX IP67

Luci Vivox FLEX IP67 (24W/m or 16W/m, Both ends lead wire-Side feed)



Luci Pte., Ltd.

2022.05.13

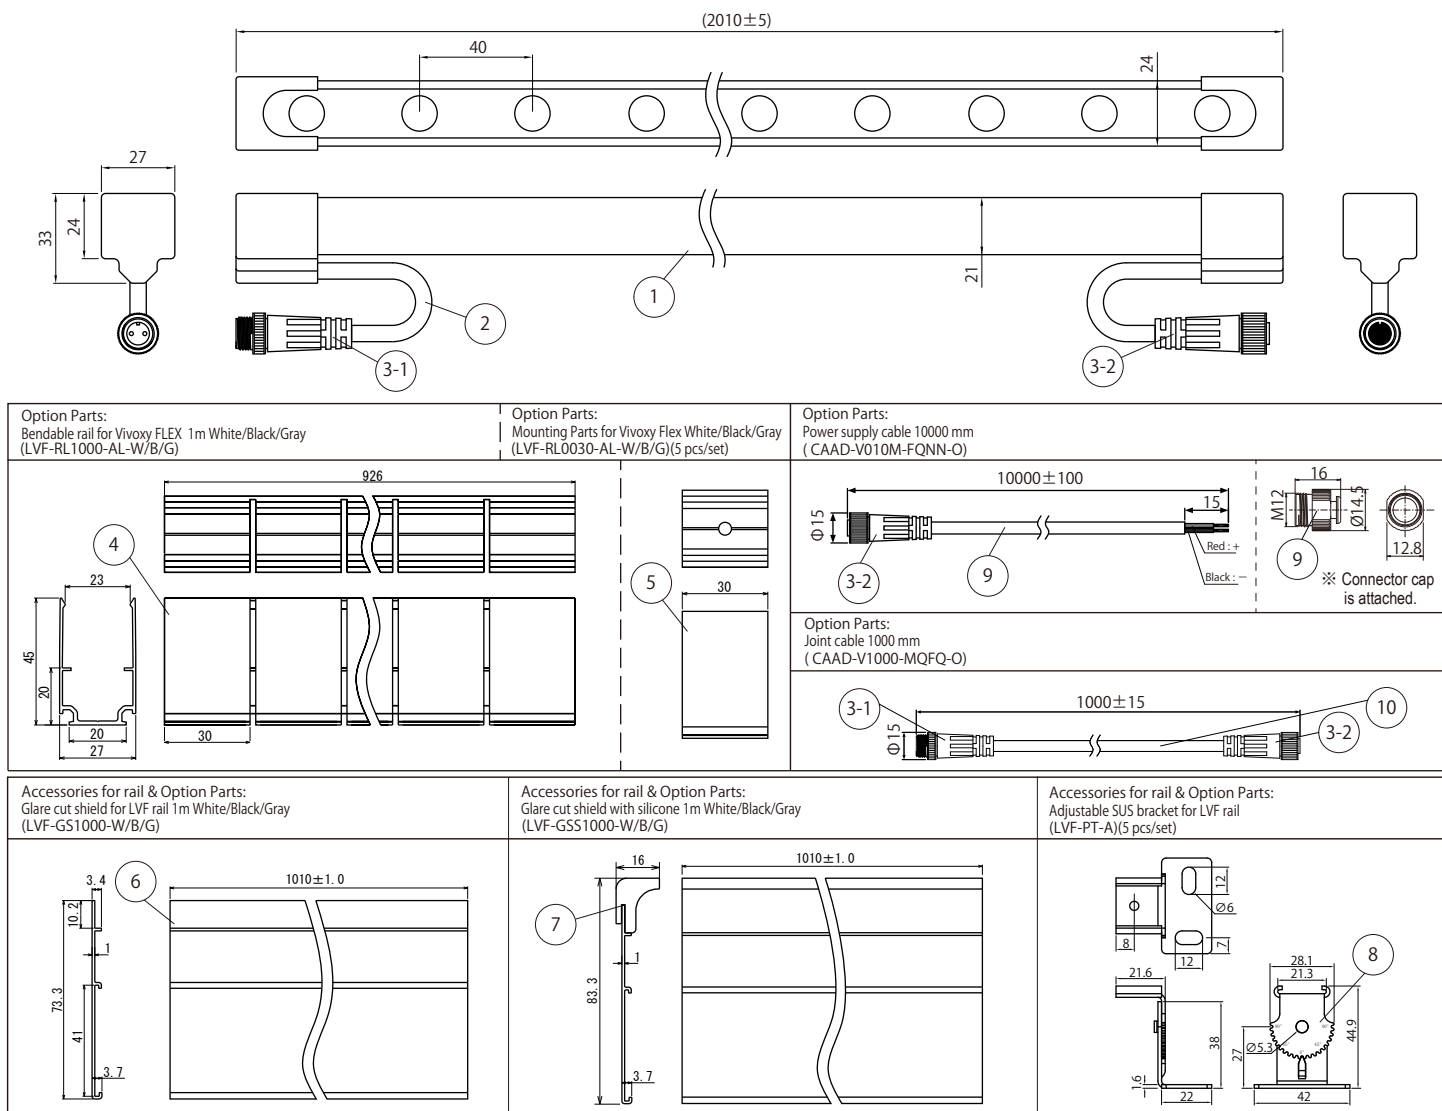

Spec • Rating may be subject to change without announcements.

Unit Of Measure : mm

Part Name	Material	Note	Drawing
1 Body			
2 Lead wire			
3-1 Connector			
3-2 Connector			
4 Bendable rail	Aluminum		
5 Mounting Parts	Aluminum		
6 Glare cut shield	Aluminum		
7 Silicone for glare cut shield	Silicone		
8 Adjustable SUS bracket	SUS		
9 Power supply cable (Connector cap)		Red+, Black-	
10 Joint cable			

Spec	Input voltage : DC24V	Max. length : 5m	Light Source color :	Item Number
Power consumption :	24W/m or 16W/m		Daylight white 6500K : D : 6500K (5800~6400K)	LVF40-2000W-D-SP2/35/50 -O-24/16-W/B/G
Environment :	In & Outdoor, IP67		Natural white 5000K : N : 5000K (4600~5000K)	LVF40-2000W-N-SP2/35/50 -O-24/16-W/B/G
Operating temperature :	-5°C~+45°C		White : W : 4000K (3700~4000K)	LVF40-2000W-W-SP2/35/50 -O-24/16-W/B/G
Option parts :	Bendable rail for Vivox FLEX, Mounting Parts for Vivox Flex,		Warm white 3500K : WW : 3500K (3300~3550K)	LVF40-2000W-WW-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield for LVF rail,		Warm white 3000K : L30 : 3000K (2850~3050K)	LVF40-2000W-L30-SP2/35/50 -O-24/16-W/B/G
	Glare cut shield with silicone,		Warm white 2700K : L27 : 2700K (2600~2750K)	LVF40-2000W-L27-SP2/35/50 -O-24/16-W/B/G
	Adjustable SUS bracket for LVF rail,		Warm white 2200K : L22 : 2200K (2000~2300K)	LVF40-2000W-L22-SP2/35/50 -O-24/16-W/B/G
	Power supply cable 10M (Connector cap is attached),			
	Joint cable 1M for UQ FLEX,			

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)
Luci Pte. Ltd. http://www.luci.co.jp E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ Tel: +65-6291-2410	Hong Kong Marketing Office Tel: +852-2219-8462 / Fax: +852-2219-8461
Korea Office Tel: +82-2-508-2541	Shanghai China mainland Regional HQ Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp