

Vivoxo Graze series


Vivoxo Graze 300

Luci Vivoxo Graze 300



Luci Pte. Ltd.

2022.10.24

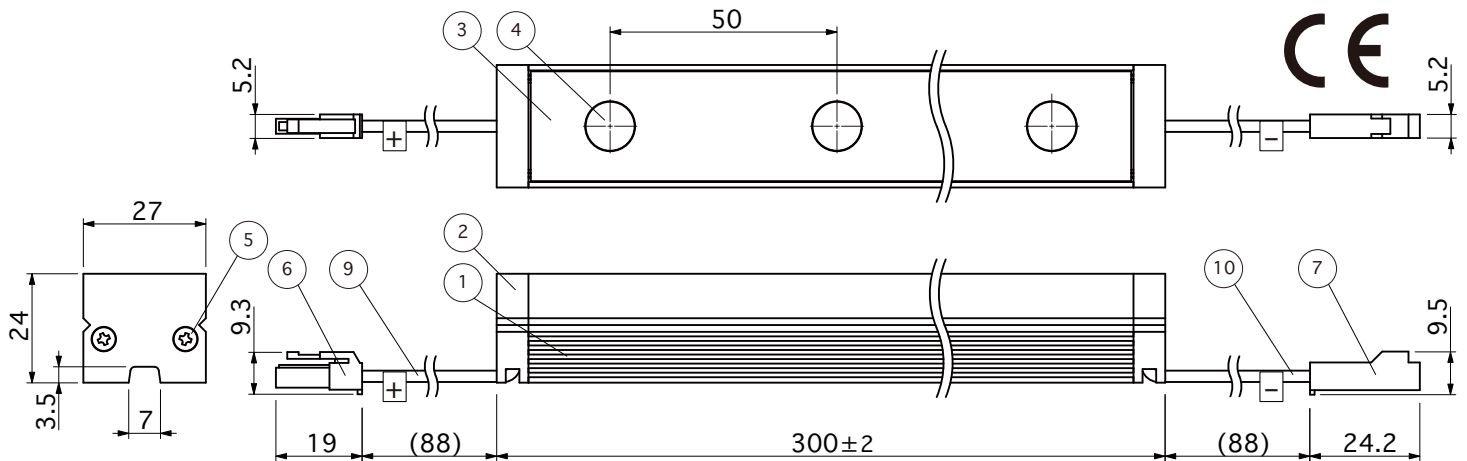

Accessories, Option parts: Mounting fixture for Vivoxo Graze (LVV-PT-A) (Attachments: 2pcs, Option parts: 1pcs)	Option parts: Adjustable mounting fixture for Vivoxo Graze (LVV-PT-B) (1pcs)	Option parts: Fall prevention mounting fixture for Vivoxo Graze (LVV-PT-C) (1pcs)	Option parts: Joint cable 5000mm for Vivoxo Graze (CAD-5000-SETB-I) (1set)	Option parts: Louver for Vivoxo Graze 300 (LVV50-LV0150) (150mm×2pcs/1set)
			<Socket side> <Plug side> 	

Unit Of Measure : mm
The specifications and prices are subject to change without prior notice.

	Part Name	Material	Note	Drawing
1	Body	Aluminum	Black	
2	Side cover	Polycarbonate	Black	
3	Top cover	Aluminum	Black	
4	Lens cover	Polycarbonate	Clear	
5	Screw			
6	Connectors	Nylon	UL94V-2 White	
7	Connectors	Nylon	UL94V-2 White	
8	Mounting part	Stainless steel	Black	
9	Lead wire		UL1015 AWG22 Red	
10	Lead wire		UL1015 AWG22 Black	
11	Louver	PC/ABS Polymer Alloy	Black	

Spec	Input voltage : 700mA / 500mA / 350mA	Light Source color :	Item Number
※1 Power consumption : 12W@700mA / 8W@500mA / 6W@350mA		Natural white : N : 5300K (1258 lm/700mA, Ra88)	LVV50-0300-N-SP-I LVV50-0300-W-SP-I LVV50-0300-WW-SP-I LVV50-0300-L30-SP-I LVV50-0300-L27-SP-I
Weight : 180g		White : W : 4200K (1244 lm/700mA, Ra92)	
LED beam angle : 15°×32.5° (SP)		Warm white 3500K : WW : 3500K (1163 lm/700mA, Ra92)	
Number of LEDs : 6		Warm white 3000K : L30 : 3000K (1046 lm/700mA, Ra92)	
※2 Max. sets connectable : 2.7m@700mA / 4.2m@500mA / 6.0m@350mA		Warm white 2700K : L27 : 2700K (980 lm/700mA, Ra94)	
Environment : Indoors (No Condensation)			
Accessories : Mounting fixture 2pcs			
Option parts : Mounting fixture 1pcs, Adjustable mounting fixture 1pcs		※1. Numerical values change depending on your power supply.	
Fall prevention mounting fixture 1pcs, Joint cable 5000mm		※2. The number of connectable lamp fitting is different depending on your power supply. Check the instructions in the manual for the power supply.	
Louver 2pcs			

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/en/> E-mail: info@luci.co.jp
 Singapore World HQ : Hong Kong Marketing Office : Korea Office : LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
 Tel: +65-6291-2410 Tel: +852-2219-8462 / Fax: +852-2219-8461 Tel: +82-2-508-2541 Shanghai China mainland Regional HQ
 Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

Vivoxo Graze series


Vivoxo Graze 600

Luci Vivoxo Graze 600



Luci Pte. Ltd.

2022.10.24

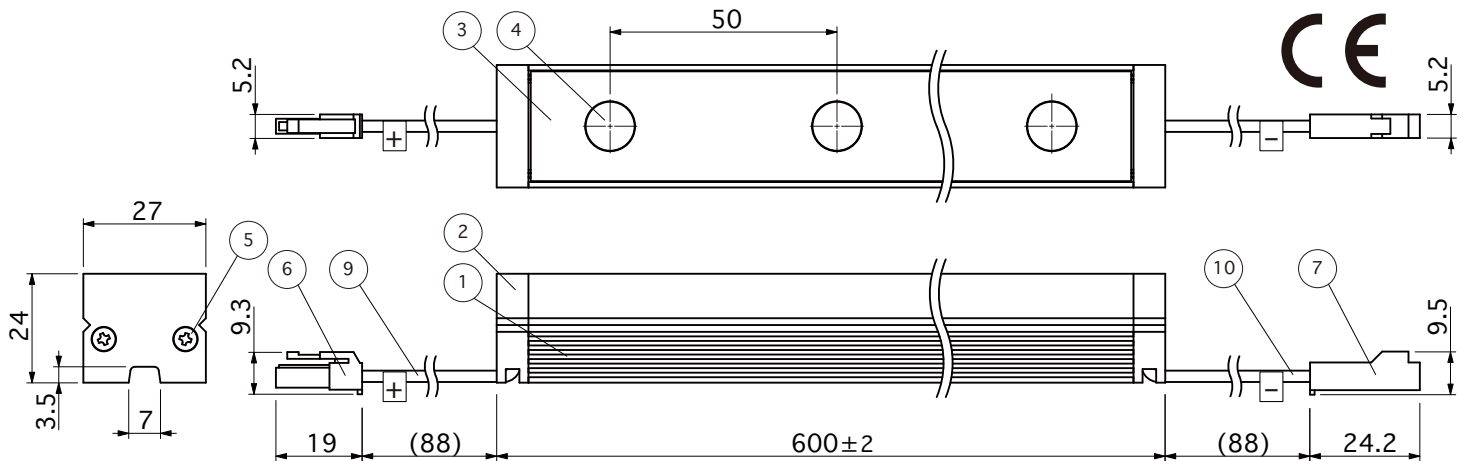

Accessories, Option parts: Mounting fixture for Vivoxo Graze (LVV-PT-A) (Attachments: 2pcs, Option parts: 1pcs)	Option parts: Adjustable mounting fixture for Vivoxo Graze (LVV-PT-B) (1pcs)	Option parts: Fall prevention mounting fixture for Vivoxo Graze (LVV-PT-C) (1pcs)	Option parts: Joint cable 5000mm for Vivoxo Graze (CAD-5000-SETB-I) (1set)	Option parts: Louver for Vivoxo Graze 300 (LVV50-LV0150) (150mm×2pcs/1set)

Unit Of Measure : mm

The specifications and prices are subject to change without prior notice.

	Part Name	Material	Note	Drawing
1	Body	Aluminum	Black	
2	Side cover	Polycarbonate	Black	
3	Top cover	Aluminum	Black	
4	Lens cover	Polycarbonate	Clear	
5	Screw			
6	Connectors	Nylon	UL94V-2 White	
7	Connectors	Nylon	UL94V-2 White	
8	Mounting part	Stainless steel	Black	
9	Lead wire		UL1015 AWG22 Red	
10	Lead wire		UL1015 AWG22 Black	
11	Louver	PC/ABS Polymer Alloy	Black	

Spec	Input voltage : 700mA / 500mA / 350mA	Light Source color :	Item Number
※1 Power consumption : 24W@700mA / 17W@500mA / 11W@350mA		Natural white : N : 5300K (2517 lm/700mA, Ra88)	LVV50-0600-N-SP-I LVV50-0600-W-SP-I LVV50-0600-WW-SP-I LVV50-0600-L30-SP-I LVV50-0600-L27-SP-I
Weight : 360g		White : W : 4200K (2489 lm/700mA, Ra92)	
LED beam angle : 15°×32.5° (SP)		Warm white 3500K : WW : 3500K (2326 lm/ 700mA, Ra92)	
Number of LEDs : 12		Warm white 3000K : L30 : 3000K (2091 lm/ 700mA, Ra92)	
※2 Max. sets connectable : 2.7m@700mA / 4.2m@500mA / 6.0m@350mA		Warm white 2700K : L27 : 2700K (1961 lm/ 700mA, Ra94)	
Environment : Indoors (No Condensation)			
Accessories : Mounting fixture 2pcs			
Option parts : Mounting fixture 1pcs, Adjustable mounting fixture 1pcs		※1. Numerical values change depending on your power supply.	
Fall prevention mounting fixture 1pcs, Joint cable 5000mm		※2. The number of connectable lamp fitting is different depending on your power supply. Check the instructions in the manual for the power supply.	
Louver 2pcs			

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)

Vivoxo Graze series



Vivoxo Graze 1200

Luci Vivoxo Graze 1200



Luci Pte. Ltd.

2022.10.24

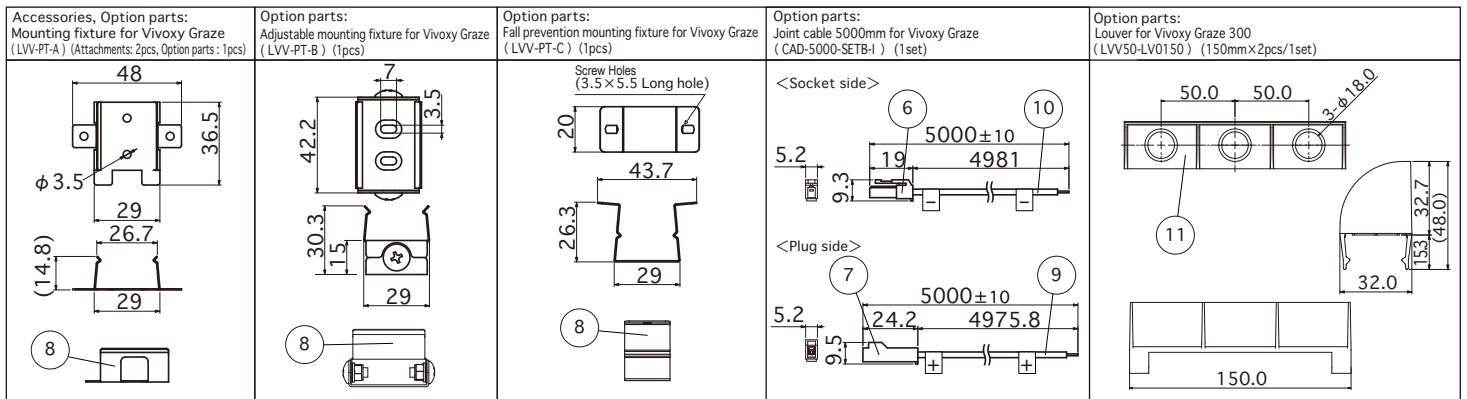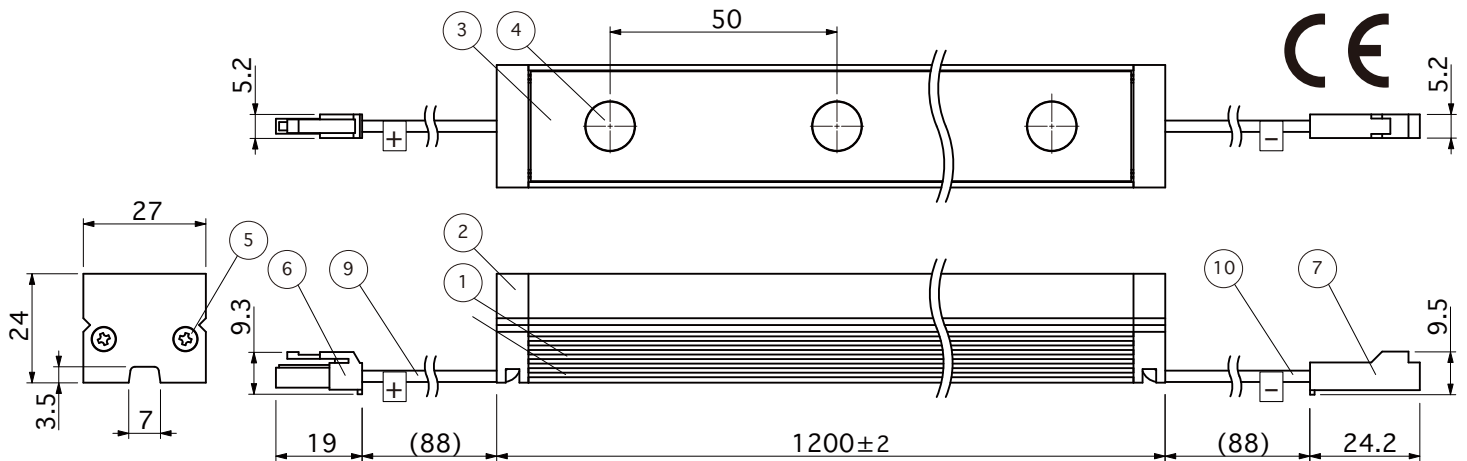

Unit Of Measure : mm

The specifications and prices are subject to change without prior notice.

	Part Name	Material	Note	Drawing
1	Body	Aluminum	Black	
2	Side cover	Polycarbonate	Black	
3	Top cover	Aluminum	Black	
4	Lens cover	Polycarbonate	Clear	
5	Screw			
6	Connectors	Nylon	UL94V-2 White	
7	Connectors	Nylon	UL94V-2 White	
8	Mounting part	Stainless steel	Black	
9	Lead wire		UL1015 AWG22 Red	
10	Lead wire		UL1015 AWG22 Black	
11	Louver	PC/ABS Polymer Alloy	Black	

Spec	Input voltage : 700mA / 500mA / 350mA	Light Source color :	Item Number
※1 Power consumption : 47W@700mA / 33W@500mA / 23W@350mA		Natural white : N : 5300K (5034 lm/700mA, Ra88)	LVV50-1200-N-SP-I LVV50-1200-W-SP-I LVV50-1200-WW-SP-I LVV50-1200-L30-SP-I LVV50-1200-L27-SP-I
Weight : 720g		White : W : 4200K (4977 lm/700mA, Ra92)	
LED beam angle : 15°×32.5° (SP)		Warm white 3500K : WW : 3500K (4652 lm/ 700mA, Ra92)	
Number of LEDs : 24		Warm white 3000K : L30 : 3000K (4183 lm/ 700mA, Ra92)	
※2 Max. sets connectable : 2.7m@700mA / 4.2m@500mA / 6.0m@350mA		Warm white 2700K : L27 : 2700K (3921 lm/ 700mA, Ra94)	
Environment : Indoors (No Condensation)			
Accessories : Mounting fixture 2pcs			
Option parts : Mounting fixture 1pcs, Adjustable mounting fixture 1pcs		※1. Numerical values change depending on your power supply.	
Fall prevention mounting fixture 1pcs, Joint cable 5000mm		※2. The number of connectable lamp fitting is different depending on your power supply. Check the instructions in the manual for the power supply.	
Louver 2pcs			

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/en/> E-mail: info@luci.co.jp LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
 Singapore World HQ : Hong Kong Marketing Office : Korea Office : Shanghai China mainland Regional HQ
 Tel: +65-6291-2410 Tel: +852-2219-8462 / Fax: +852-2219-8461 Tel: +82-2-508-2541 Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp