

Vivoxo Graze series



Vivoxo Graze THOF 300

Luci Vivoxo Graze THOF 300



Luci Pte. Ltd.

2022.11.02

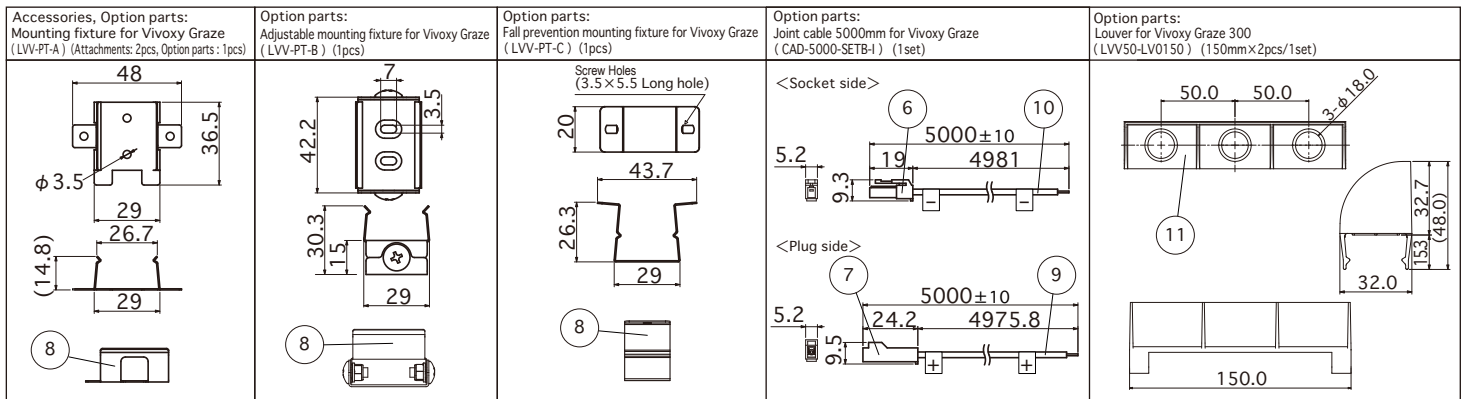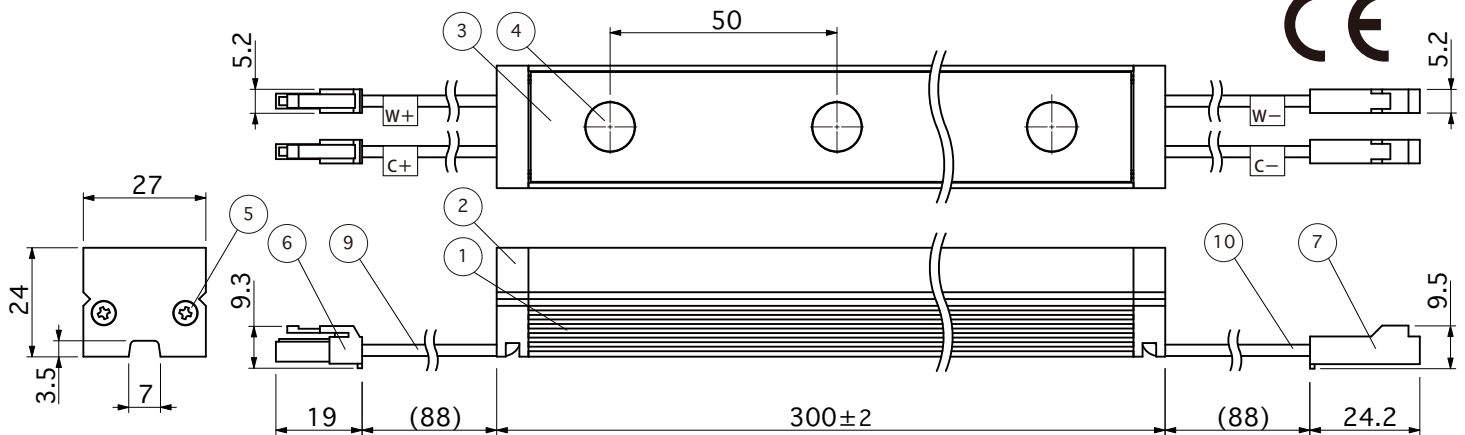

Unit Of Measure : mm

The specifications and prices are subject to change without prior notice.

	Part Name	Material	Note	Drawing
1	Body	Aluminum	Black	
2	Side cover	Polycarbonate	Black	
3	Top cover	Aluminum	Black	
4	Lens cover	Polycarbonate	Clear	
5	Screw			
6	Connectors	Nylon	UL94V-2 White	
7	Connectors	Nylon	UL94V-2 White	
8	Mounting part	Stainless steel	Black	
9	Lead wire		UL1015 AWG22 (W+:Red ,C+:White)	
10	Lead wire		UL1015 AWG22 (W -:Blue,C -:Black)	
11	Louver	PC/ABS Polymer Alloy	Black	

Spec	Input voltage : 700mA / 500mA / 350mA	Light Source color :	Item Number
※1	Power Consumption 1ch max(@typ) : 6W@700mA / 5W@500mA / 3W@350mA Power Consumption 2ch max(@typ) : 12W@700mA / 8W@500mA / 6W@350mA	Natural white (5300K) N 100% L27 100% (1097 lm / Ra93)	LVVTH50-0300-NL27-SP-I LVVTH50-0300-WL27-SP-I
	Weight : 180g	{ N 100% L27 0% (621 lm / Ra88)	
	LED beam angle : 15°×32.5° (SP)	Warm white (2700K) N 0% L27 100% (496 lm / Ra93)	
	Number of LEDs : 6	White (4200K) W 100% L27 100% (1089 lm / Ra93)	
※2	Max. sets connectable : 5.7m@700mA / 8.4m@500mA / 12.0m@350mA	{ W 100% L27 0% (605 lm / Ra91)	
	Environment : Indoors (No Condensation)	Warm white (2700K) W 0% L27 100% (496 lm / Ra93)	
	Accessories : Mounting fixture 2pcs		
	Option parts : Mounting fixture 1pcs, Adjustable mounting fixture 1pcs	※1. Numerical values change depending on your power supply.	
	Fall prevention mounting fixture 1pcs, Joint cable 5000mm	※2. The number of connectable lamp fitting is different depending on your power supply. Check the instructions in the manual for the power supply.	
	Louver 2pcs		

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/en/> E-mail: info@luci.co.jp LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ Hong Kong Marketing Office Korea Office Shanghai China mainland Regional HQ
Tel: +65-6291-2410 Tel: +852-2219-8462 / Fax: +852-2219-8461 Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

Luci Pte. Ltd. http://www.luci.co.jp/en/ E-mail: info@luci.co.jp			LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ Tel: +65-6291-2410	Hong Kong Marketing Office Tel: +852-2219-8462 / Fax: +852-2219-8461	Korea Office Tel: +82-2-508-2541	Shanghai China mainland Regional HQ Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail: info@luci.co.jp

Vivoxo Graze series



Vivoxo Graze THOF 1200

Luci Vivoxo Graze THOF 1200



Luci Pte. Ltd.

2022.11.02

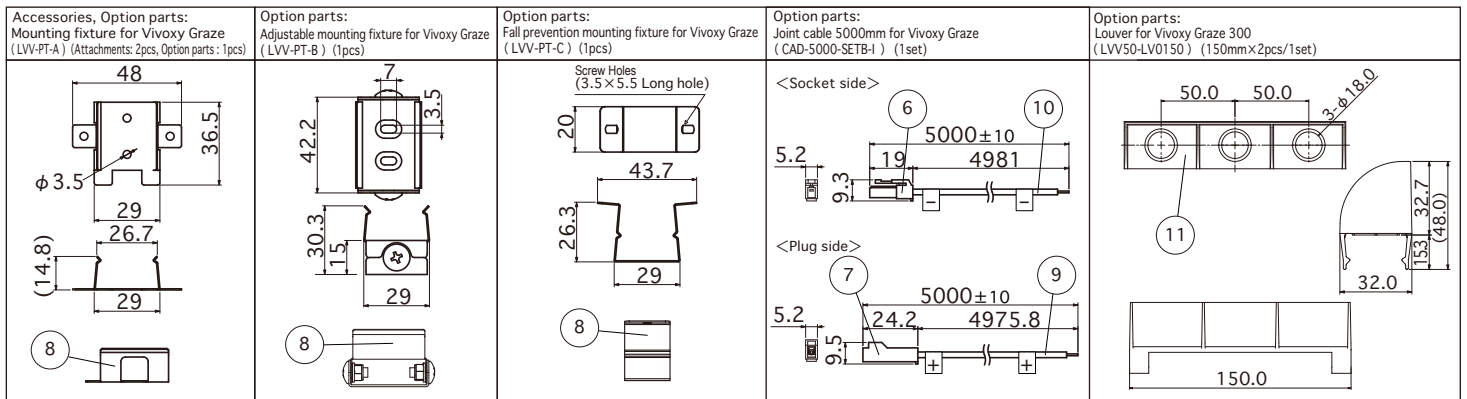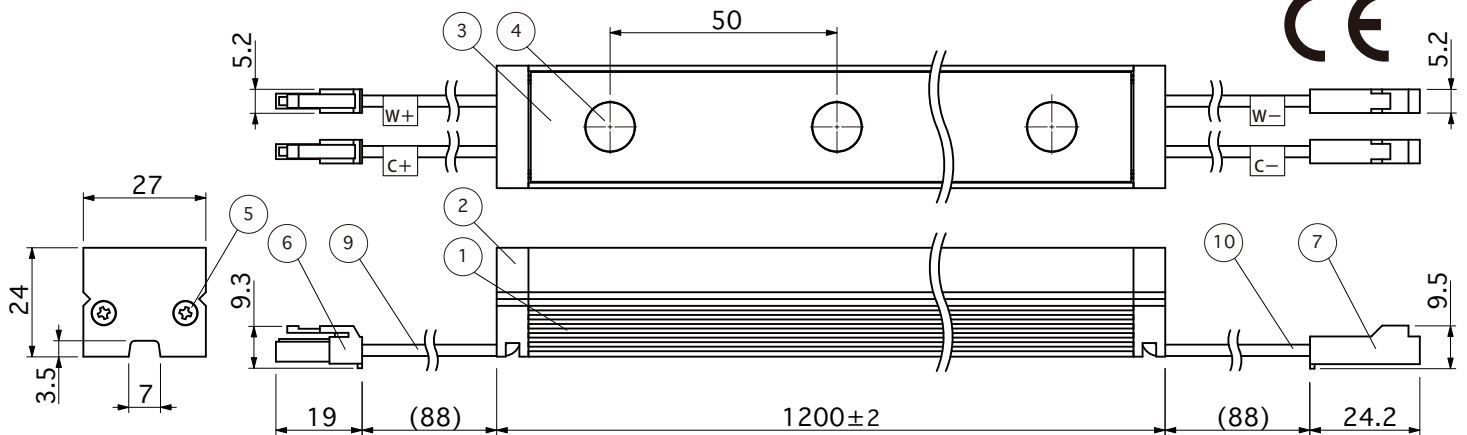

Unit Of Measure : mm
The specifications and prices are subject to change without prior notice.

	Part Name	Material	Note	Drawing
1	Body	Aluminum	Black	
2	Side cover	Polycarbonate	Black	
3	Top cover	Aluminum	Black	
4	Lens cover	Polycarbonate	Clear	
5	Screw			
6	Connectors	Nylon	UL94V-2 White	
7	Connectors	Nylon	UL94V-2 White	
8	Mounting part	Stainless steel	Black	
9	Lead wire		UL1015 AWG22 (W+:Red ,C+:White)	
10	Lead wire		UL1015 AWG22 (W -:Blue,C -:Black)	
11	Louver	PC/ABS Polymer Alloy	Black	

Spec	Input voltage : 700mA / 500mA / 350mA	Light Source color :	Item Number
※1	Power Consumption 1ch max(@typ) : 24W@700mA / 17W@500mA / 12W@350mA Power Consumption 2ch max(@typ) : 47W@700mA / 33W@500mA / 23W@350mA Weight : 720g LED beam angle : 15°×32.5° (SP) Number of LEDs : 24	Natural white (5300K) N 100% L27 0% (4386 lm / Ra93) N 100% L27 0% (2482 lm / Ra88) Warm white (2700K) N 0% L27 100% (1984 lm / Ra93) White (4200K) W 100% L27 100% (4356 lm / Ra93)	LVVTH50-1200-NL27-SP-I LVVTH50-1200-WL27-SP-I
※2	Max. sets connectable : 5.7m@700mA / 8.4m@500mA / 12.0m@350mA	W 100% L27 0% (2418 lm / Ra91)	
	Environment : Indoors (No Condensation)	Warm white (2700K) W 0% L27 100% (1984 lm / Ra93)	
	Accessories : Mounting fixture 2pcs		
	Option parts : Mounting fixture 1pcs, Adjustable mounting fixture 1pcs	※1. Numerical values change depending on your power supply.	
	Fall prevention mounting fixture 1pcs, Joint cable 5000mm	※2. The number of connectable lamp fitting is different depending on your power supply. Check the instructions in the manual for the power supply.	
	Louver 2pcs		

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp/en/> E-mail: info@luci.co.jp LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ : Hong Kong Marketing Office : Korea Office : Shanghai China mainland Regional HQ
Tel: +65-6291-2410 Tel: +852-2219-8462 / Fax: +852-2219-8461 Tel: +82-2-508-2541 Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp