

nano line series

Luci nano line

Luci nano line 109


Luci Pte., Ltd.

2017.12.25



Side View 1

Side View 2




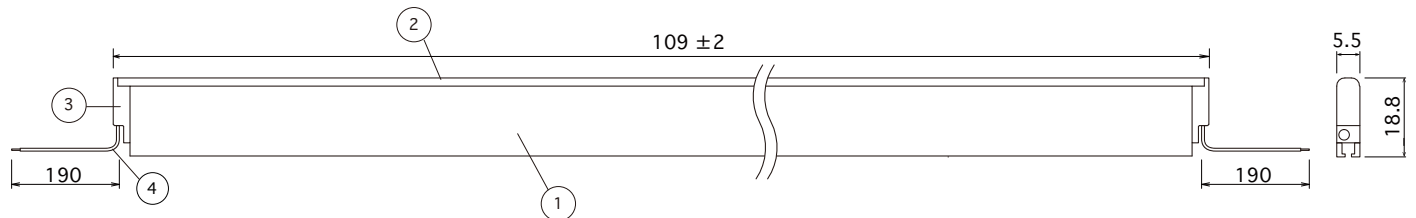


Option parts:
Mounting Clip A for nano line :
(LNL-PTA) (Accessories : 2 parts for the body installation, and 2 parts for the end part installation,
Option parts : 4 parts for the body installation, and 4 parts for the end part installation)

Installation Dimensions
(Side View)

Option parts:
Magnet for nano line
(LNL-MG) (10pcs / 1bag)

Installation Dimensions
(Side View)

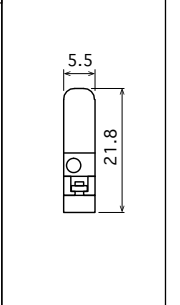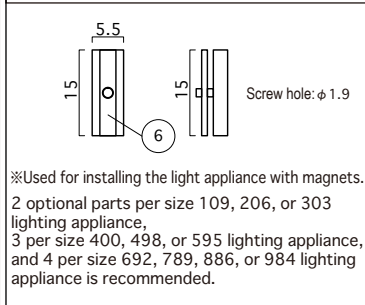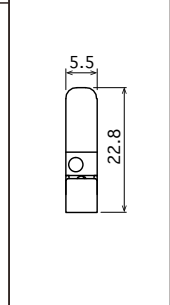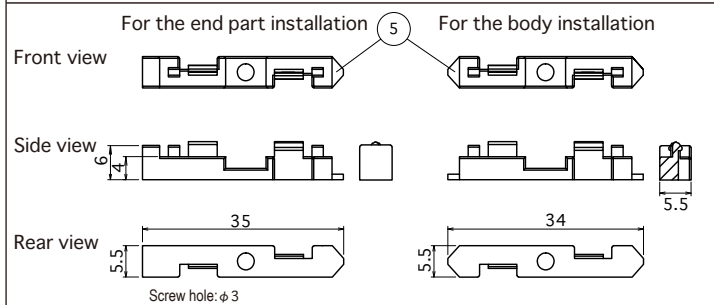

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG26, black+, white-	
5	Mounting Clip A	PC (Polycarbonate)	Clear	
6	Magnet	Stainless steel, Neodymium	Plate, Magnet	
7				
8				
9				
10				

Spec	Input voltage : DC24V	Light Source color : Natural white : N : 5300K (-- lm/ Ra --)	Item Number
	Power consumption : 0.7W	White : W : 4200K (7 lm*/ Ra 92)	LNL-0109-N-DF-I LNL-0109-W-DF-I LNL-0109-WW-DF-I LNL-0109-L30-DF-I LNL-0109-L27-DF-I LNL-0109-L24-DF-I
	Weight : 20g	Warm white : WW : 3500K (6 lm*/ Ra 91)	
	Lamp fitting length(L) : 109mm	Warm white 3000K : L30 : 3000K (7 lm*/ Ra 87)	
	Max. sets connectable : 5m	Warm white 2700K : L27 : 2700K (6 lm*/ Ra 87)	
	Environment : Indoors (No Condensation)	Warm white 2400K : L24 : 2400K (5 lm*/ Ra 85)	
	Attachments : Mounting Clip A		
	(2 parts for the body installation, and 2 parts for the end part installation.)	*=Equivalent	
	Option parts : Mounting Clip A, Magnet		

Job/Project Name	Area/Location/Circuit No.		
Product Code	Qty.	Length(mm)	
Luci Pte. Ltd. http://www.luci.co.jp E-mail: info@luci.co.jp Singapore World HQ Hong Kong Marketing Office Korea Office Tel: +65-6291-2410 Tel: +852-2219-8462 / Fax: +852-2219-8461 Tel: +82-2-508-2541 LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD. Shanghai China mainland Regional HQ Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp			

nano line series

Luci nano line

Luci nano line 206


Luci Pte., Ltd.

2017.12.25



Side View 1

Side View 2




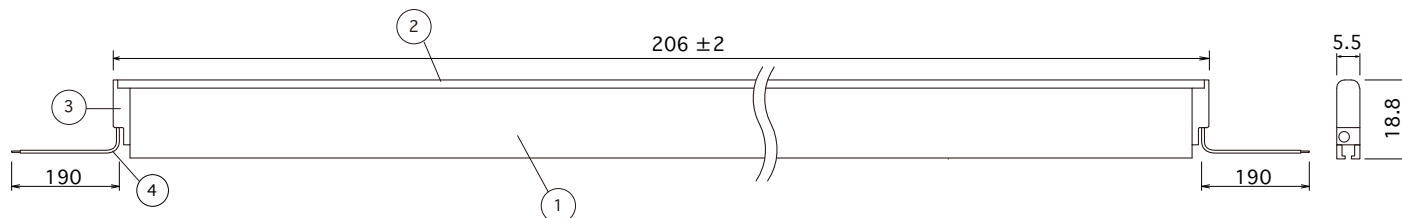


Option parts:
Mounting Clip A for nano line :
(LNL-PTA) (Accessories : 2 parts for the body installation, and 2 parts for the end part installation,
Option parts : 4 parts for the body installation, and 4 parts for the end part installation)

Installation Dimensions
(Side View)

Option parts:
Magnet for nano line
(LNL-MG) (10pcs / 1bag)

Installation Dimensions
(Side View)

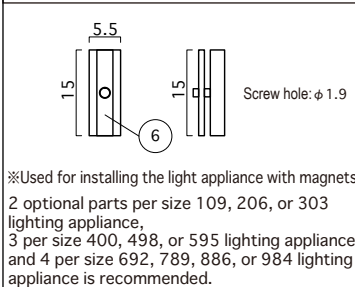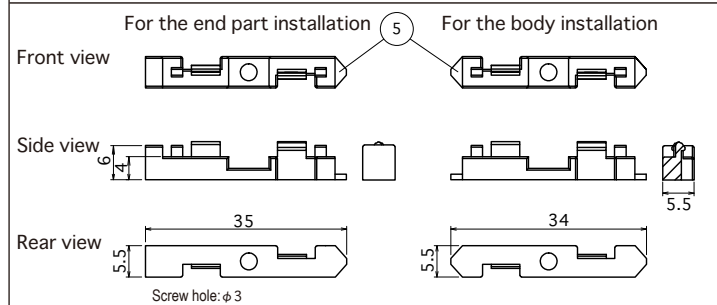

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG26, black+, white-	
5	Mounting Clip A	PC (Polycarbonate)	Clear	
6	Magnet	Stainless steel, Neodymium	Plate, Magnet	
7				
8				
9				
10				

Spec	Input voltage : DC24V	Light Source color : Natural white : N : 5300K (— lm/ Ra —)	Item Number
	Power consumption : 1.4W	White : W : 4200K (13 lm*/ Ra 92)	LNL-0206-N-DF-I LNL-0206-W-DF-I LNL-0206-WW-DF-I LNL-0206-L30-DF-I LNL-0206-L27-DF-I LNL-0206-L24-DF-I
	Weight : 37g	Warm white : WW : 3500K (12 lm*/ Ra 91)	
	Lamp fitting length(L) : 206mm	Warm white 3000K : L30 : 3000K (13 lm*/ Ra 87)	
	Max. sets connectable : 5m	Warm white 2700K : L27 : 2700K (12 lm*/ Ra 87)	
	Environment : Indoors (No Condensation)	Warm white 2400K : L24 : 2400K (10 lm*/ Ra 85)	
	Attachments : Mounting Clip A		
	(2 parts for the body installation, and 2 parts for the end part installation.)	*=Equivalent	
	Option parts : Mounting Clip A, Magnet		

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)
Luci Pte. Ltd. http://www.luci.co.jp E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ Tel: +65-6291-2410	Hong Kong Marketing Office Tel: +852-2219-8462 / Fax: +852-2219-8461
Korea Office Tel: +82-2-508-2541	Shanghai China mainland Regional HQ Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

nano line series

Luci nano line

Luci nano line 303

Luci Pte., Ltd.


2017.12.25

Luci



Side View 1

Side View 2




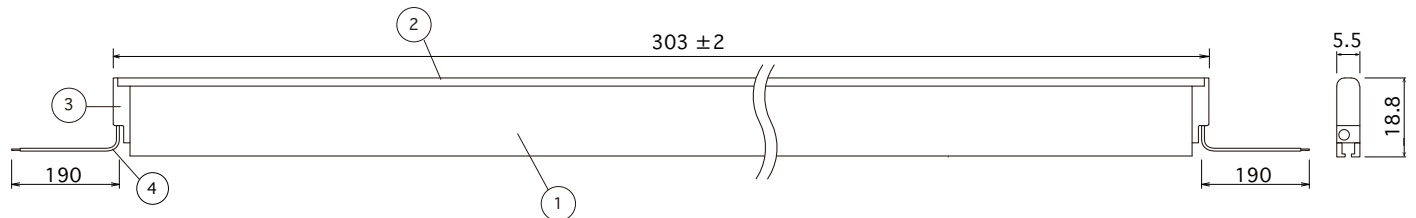


Option parts:
Mounting Clip A for nano line :
(LNL-PTA) (Accessories : 2 parts for the body installation, and 2 parts for the end part installation,
Option parts : 4 parts for the body installation, and 4 parts for the end part installation)

Installation Dimensions
(Side View)

Option parts:
Magnet for nano line
(LNL-MG) (10pcs / 1bag)

Installation Dimensions
(Side View)

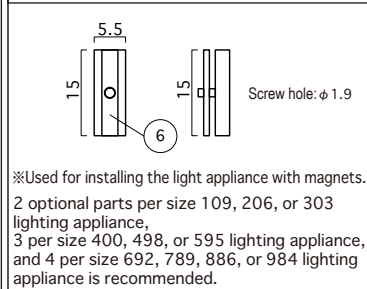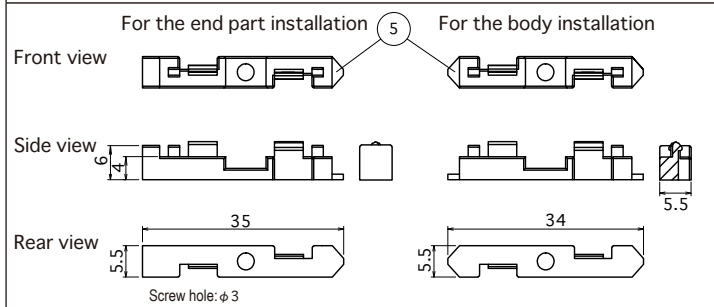

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG26, black+, white-	
5	Mounting Clip A	PC (Polycarbonate)	Clear	
6	Magnet	Stainless steel, Neodymium	Plate, Magnet	
7				
8				
9				
10				

Spec	Input voltage : DC24V	Light Source color : Natural white : N : 5300K (— lm/ Ra —)	Item Number
	Power consumption : 2.2W	White : W : 4200K (20 lm*/ Ra 92)	LNL-0303-N-DF-I LNL-0303-W-DF-I LNL-0303-WW-DF-I LNL-0303-L30-DF-I LNL-0303-L27-DF-I LNL-0303-L24-DF-I
	Weight : 52g	Warm white : WW : 3500K (17 lm*/ Ra 91)	
	Lamp fitting length(L) : 303mm	Warm white 3000K : L30 : 3000K (20 lm*/ Ra 87)	
	Max. sets connectable : 5m	Warm white 2700K : L27 : 2700K (18 lm*/ Ra 87)	
	Environment : Indoors (No Condensation)	Warm white 2400K : L24 : 2400K (16 lm*/ Ra 85)	
	Attachments : Mounting Clip A		
	(2 parts for the body installation, and 2 parts for the end part installation.)	*=Equivalent	
	Option parts : Mounting Clip A, Magnet		

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)
Luci Pte. Ltd. http://www.luci.co.jp E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ Tel: +65-6291-2410	Hong Kong Marketing Office Tel: +852-2219-8462 / Fax: +852-2219-8461
Korea Office Tel: +82-2-508-2541	Shanghai China mainland Regional HQ Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

nano line series

Luci nano line

Luci nano line 400

Luci Pte., Ltd.


2017.12.25

Luci



Side View 1

Side View 2




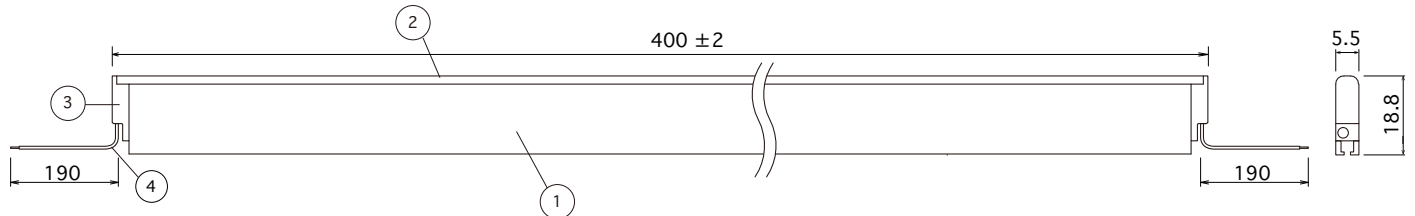


Option parts:
Mounting Clip A for nano line :
(LNL-PTA) (Accessories : 2 parts for the body installation, and 2 parts for the end part installation,
Option parts : 4 parts for the body installation, and 4 parts for the end part installation)

Installation Dimensions
(Side View)

Option parts:
Magnet for nano line
(LNL-MG) (10pcs / 1bag)

Installation Dimensions
(Side View)

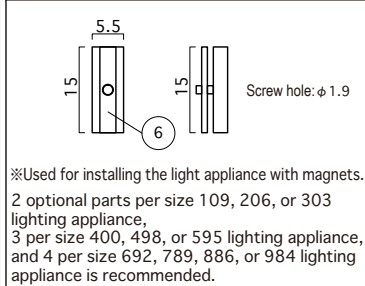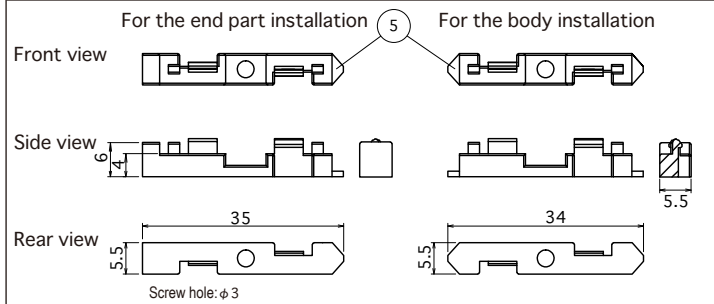

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG26, black+, white-	
5	Mounting Clip A	PC (Polycarbonate)	Clear	
6	Magnet	Stainless steel, Neodymium	Plate, Magnet	
7				
8				
9				
10				

Spec	Input voltage : DC24V	Light Source color : Natural white : N : 5300K (— lm/ Ra —)	Item Number
	Power consumption : 2.9W	White : W : 4200K (26 lm*/ Ra 92)	LNL-0400-N-DF-I LNL-0400-W-DF-I LNL-0400-WW-DF-I LNL-0400-L30-DF-I LNL-0400-L27-DF-I LNL-0400-L24-DF-I
	Weight : 68g	Warm white : WW : 3500K (23 lm*/ Ra 91)	
	Lamp fitting length(L) : 400mm	Warm white 3000K : L30 : 3000K (26 lm*/ Ra 87)	
	Max. sets connectable : 5m	Warm white 2700K : L27 : 2700K (24 lm*/ Ra 87)	
	Environment : Indoors (No Condensation)	Warm white 2400K : L24 : 2400K (21 lm*/ Ra 85)	
	Attachments : Mounting Clip A		
	(2 parts for the body installation, and 2 parts for the end part installation.)	*=Equivalent	
	Option parts : Mounting Clip A, Magnet		

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)
Luci Pte. Ltd. http://www.luci.co.jp Singapore World HQ Tel: +65-6291-2410 Hong Kong Marketing Office Tel: +852-2219-8462 / Fax: +852-2219-8461 Korea Office Tel: +82-2-508-2541	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD. Shanghai China mainland Regional HQ Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

nano line series

Luci nano line

Luci nano line 498

Luci Pte., Ltd.


2017.12.25

Luci



Side View 1

Side View 2




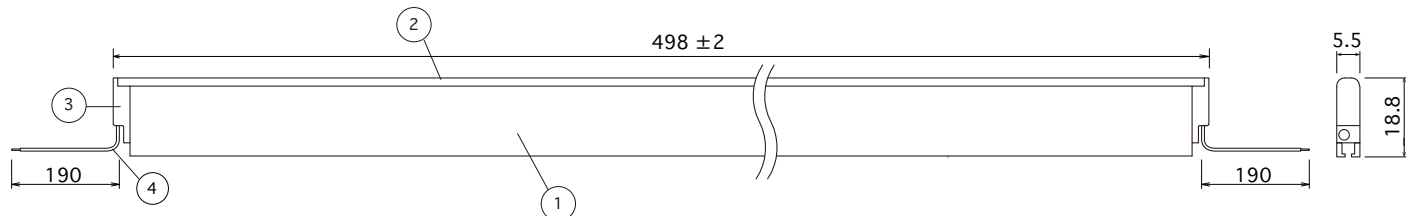


Option parts:
Mounting Clip A for nano line :
(LNL-PTA) (Accessories : 2 parts for the body installation, and 2 parts for the end part installation,
Option parts : 4 parts for the body installation, and 4 parts for the end part installation)

Installation Dimensions
(Side View)

Option parts:
Magnet for nano line
(LNL-MG) (10pcs / 1bag)

Installation Dimensions
(Side View)

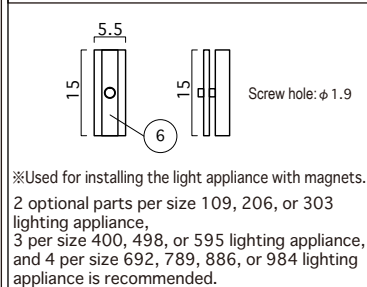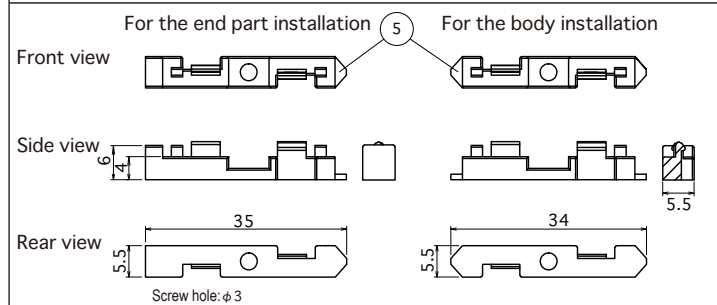


	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG26, black+, white-	
5	Mounting Clip A	PC (Polycarbonate)	Clear	
6	Magnet	Stainless steel, Neodymium	Plate, Magnet	
7				
8				
9				
10				


Spec	Input voltage : DC24V	Light Source color : Natural white : N : 5300K (— lm/ Ra —)	Item Number
	Power consumption : 3.6W	White : W : 4200K (33 lm*/ Ra 92)	LNL-0498-N-DF-I LNL-0498-W-DF-I LNL-0498-WW-DF-I LNL-0498-L30-DF-I LNL-0498-L27-DF-I LNL-0498-L24-DF-I
	Weight : 83g	Warm white : WW : 3500K (29 lm*/ Ra 91)	
	Lamp fitting length(L) : 498mm	Warm white 3000K : L30 : 3000K (33 lm*/ Ra 87)	
	Max. sets connectable : 5m	Warm white 2700K : L27 : 2700K (30 lm*/ Ra 87)	
	Environment : Indoors (No Condensation)	Warm white 2400K : L24 : 2400K (26 lm*/ Ra 85)	
	Attachments : Mounting Clip A		
	(2 parts for the body installation, and 2 parts for the end part installation.)	*=Equivalent	
	Option parts : Mounting Clip A, Magnet		

Job/Project Name	Area/Location/Circuit No.		
Product Code	Qty.	Length(mm)	
Luci Pte. Ltd. http://www.luci.co.jp	E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.	
Singapore World HQ	Hong Kong Marketing Office	Korea Office	Shanghai China mainland Regional HQ
Tel: +65-6291-2410	Tel: +852-2219-8462 / Fax: +852-2219-8461	Tel: +82-2-508-2541	Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp



Side View 1

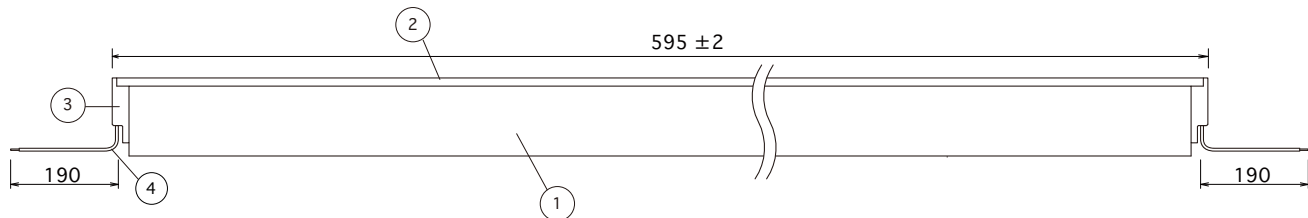


Side View 2




Option parts:
Mounting Clip A for nano line :
(LNL-PTA) (Accessories : 2 parts for the body installation, and 2 parts for the end part installation,
Option parts : 4 parts for the body installation, and 4 parts for the end part installation)

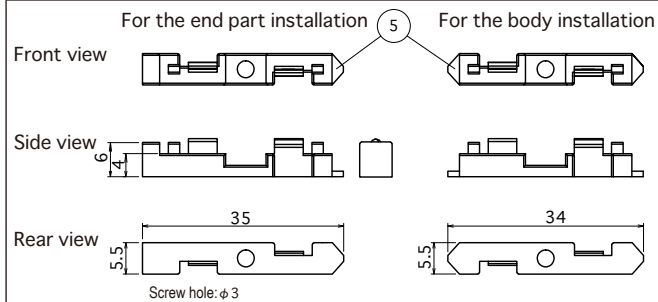
Installation Dimensions
(Side View)

Option parts:
Magnet for nano line
(LNL-MG) (10pcs / 1bag)



※Used for installing the light appliance with magnets.
2 optional parts per size 109, 206, or 303
lighting appliance,
3 per size 400, 498, or 595 lighting appliance,
and 4 per size 692, 789, 886, or 984 lighting
appliance is recommended.

Installation Dimensions
(Side View)

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG26, black+, white-	
5	Mounting Clip A	PC (Polycarbonate)	Clear	
6	Magnet	Stainless steel, Neodymium	Plate, Magnet	
7				
8				
9				
10				

Spec	Input voltage : DC24V	Light Source color : Natural white : N : 5300K (— lm/ Ra —)	Item Number
	Power consumption : 4.3W	White : W : 4200K (40 lm*/ Ra 92)	LNL-0595-N-DF-I LNL-0595-W-DF-I LNL-0595-WW-DF-I LNL-0595-L30-DF-I LNL-0595-L27-DF-I LNL-0595-L24-DF-I
	Weight : 99g	Warm white : WW : 3500K (35 lm*/ Ra 91)	
	Lamp fitting length(L) : 595mm	Warm white 3000K : L30 : 3000K (39 lm*/ Ra 87)	
	Max. sets connectable : 5m	Warm white 2700K : L27 : 2700K (35 lm*/ Ra 87)	
	Environment : Indoors (No Condensation)	Warm white 2400K : L24 : 2400K (31 lm*/ Ra 85)	
	Attachments : Mounting Clip A		
	(2 parts for the body installation, and 2 parts for the end part installation.)	*=Equivalent	
	Option parts : Mounting Clip A, Magnet		

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)


Luci Pte. Ltd. <http://www.luci.co.jp>E-mail: info@luci.co.jpSingapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.


Shanghai China mainland Regional HQ

Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp



Side View 1

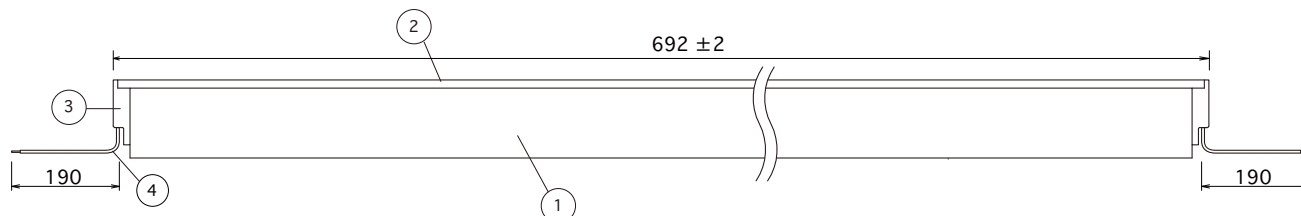



Side View 2




Option parts:
Mounting Clip A for nano line :
(LNL-PTA) (Accessories : 2 parts for the body installation, and 2 parts for the end part installation,
Option parts : 4 parts for the body installation, and 4 parts for the end part installation)

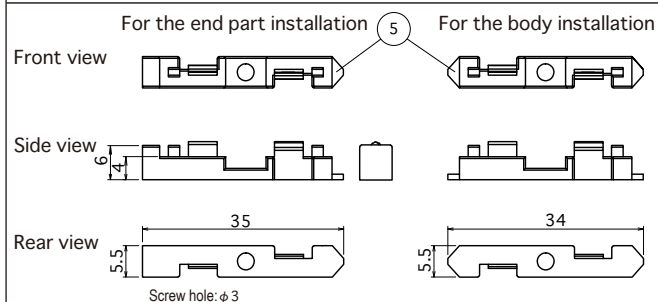Installation Dimensions
(Side View)

Option parts:
Magnet for nano line
(LNL-MG) (10pcs / 1bag)

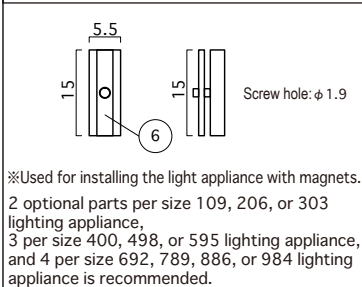Installation Dimensions
(Side View)

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG26, black+, white-	
5	Mounting Clip A	PC (Polycarbonate)	Clear	
6	Magnet	Stainless steel, Neodymium	Plate, Magnet	
7				
8				
9				
10				

Spec	Input voltage : DC24V	Light Source color : Natural white : N : 5300K (— lm/ Ra —)	Item Number
	Power consumption : 5.0W	White : W : 4200K (46 lm*/ Ra 92)	LNL-0692-N-DF-I LNL-0692-W-DF-I LNL-0692-WW-DF-I LNL-0692-L30-DF-I LNL-0692-L27-DF-I LNL-0692-L24-DF-I
	Weight : 114g	Warm white : WW : 3500K (41 lm*/ Ra 91)	
	Lamp fitting length(L) : 692mm	Warm white 3000K : L30 : 3000K (46 lm*/ Ra 87)	
	Max. sets connectable : 5m	Warm white 2700K : L27 : 2700K (41 lm*/ Ra 87)	
	Environment : Indoors (No Condensation)	Warm white 2400K : L24 : 2400K (36 lm*/ Ra 85)	
	Attachments : Mounting Clip A		
	(2 parts for the body installation, and 2 parts for the end part installation.)	*=Equivalent	
	Option parts : Mounting Clip A, Magnet		

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp>E-mail: info@luci.co.jpSingapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541


LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Shanghai China mainland Regional HQ

Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

Side View 1

Side View 2




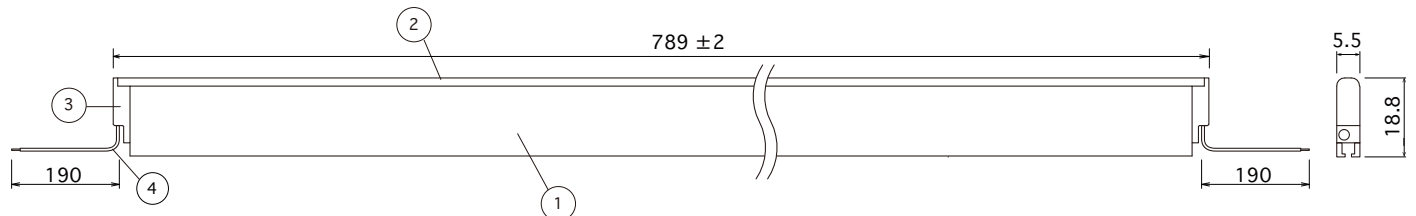


Option parts:
Mounting Clip A for nano line :
(LNL-PTA) (Accessories : 2 parts for the body installation, and 2 parts for the end part installation,
Option parts : 4 parts for the body installation, and 4 parts for the end part installation)

Installation Dimensions
(Side View)

Option parts:
Magnet for nano line
(LNL-MG) (10pcs / 1bag)

Installation Dimensions
(Side View)

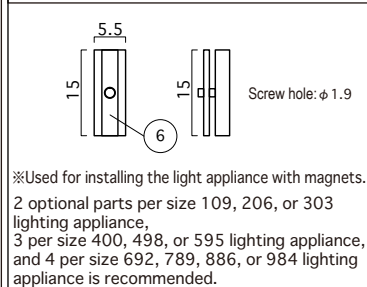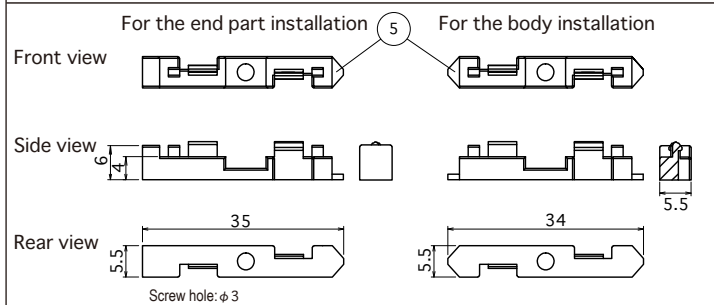

	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG26, black+, white-	
5	Mounting Clip A	PC (Polycarbonate)	Clear	
6	Magnet	Stainless steel, Neodymium	Plate, Magnet	
7				
8				
9				
10				

Spec	Input voltage : DC24V	Light Source color : Natural white : N : 5300K (— lm/ Ra —)	Item Number
	Power consumption : 5.8W	White : W : 4200K (53 lm*/ Ra 92)	LNL-0789-N-DF-I LNL-0789-W-DF-I LNL-0789-WW-DF-I LNL-0789-L30-DF-I LNL-0789-L27-DF-I LNL-0789-L24-DF-I
	Weight : 130g	Warm white : WW : 3500K (46 lm*/ Ra 91)	
	Lamp fitting length(L) : 789mm	Warm white 3000K : L30 : 3000K (52 lm*/ Ra 87)	
	Max. sets connectable : 5m	Warm white 2700K : L27 : 2700K (47 lm*/ Ra 87)	
	Environment : Indoors (No Condensation)	Warm white 2400K : L24 : 2400K (42 lm*/ Ra 85)	
	Attachments : Mounting Clip A		
	(2 parts for the body installation, and 2 parts for the end part installation.)	*=Equivalent	
	Option parts : Mounting Clip A, Magnet		

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)
Luci Pte. Ltd. http://www.luci.co.jp E-mail: info@luci.co.jp	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.
Singapore World HQ Tel: +65-6291-2410	Hong Kong Marketing Office Tel: +852-2219-8462 / Fax: +852-2219-8461
Korea Office Tel: +82-2-508-2541	Shanghai China mainland Regional HQ Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

nano line series

Luci nano line

Luci nano line 886

Luci Pte., Ltd.


2017.12.25

Luci



Side View 1

Side View 2




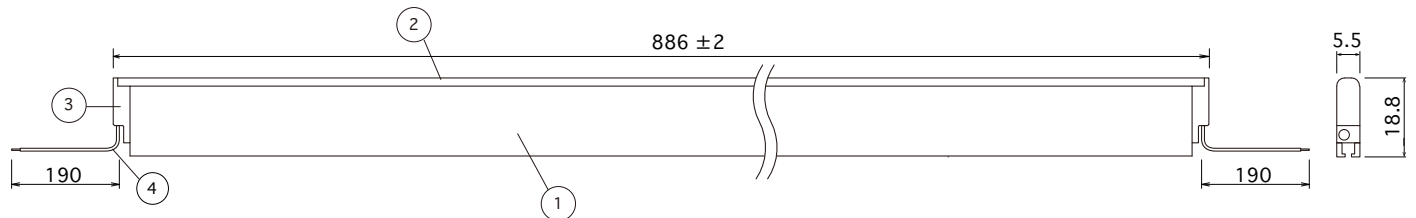


Option parts:
Mounting Clip A for nano line :
(LNL-PTA) (Accessories : 2 parts for the body installation, and 2 parts for the end part installation,
Option parts : 4 parts for the body installation, and 4 parts for the end part installation)

Installation Dimensions
(Side View)

Option parts:
Magnet for nano line
(LNL-MG) (10pcs / 1bag)

Installation Dimensions
(Side View)

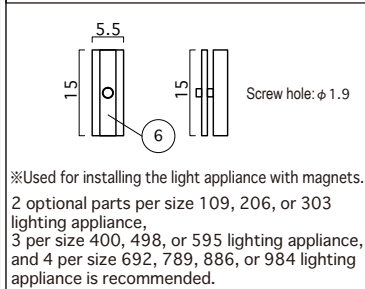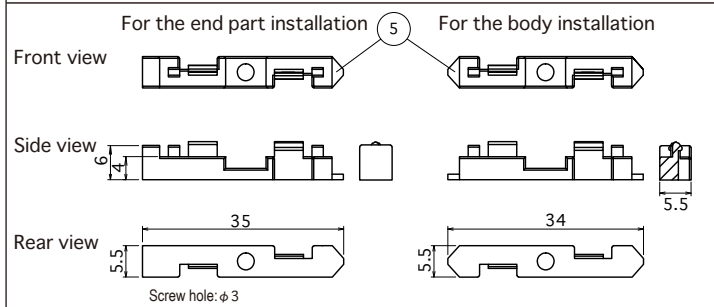


	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG26, black+, white-	
5	Mounting Clip A	PC (Polycarbonate)	Clear	
6	Magnet	Stainless steel, Neodymium	Plate, Magnet	
7				
8				
9				
10				

Spec	Input voltage : DC24V	Light Source color : Natural white : N : 5300K (— lm/ Ra —)	Item Number
	Power consumption : 6.5W	White : W : 4200K (59 lm* / Ra 92)	LNL-0886-N-DF-I LNL-0886-W-DF-I LNL-0886-WW-DF-I LNL-0886-L30-DF-I LNL-0886-L27-DF-I LNL-0886-L24-DF-I
	Weight : 145g	Warm white : WW : 3500K (52 lm* / Ra 91)	
	Lamp fitting length(L) : 886mm	Warm white 3000K : L30 : 3000K (59 lm* / Ra 87)	
	Max. sets connectable : 5m	Warm white 2700K : L27 : 2700K (53 lm* / Ra 87)	
	Environment : Indoors (No Condensation)	Warm white 2400K : L24 : 2400K (47 lm* / Ra 85)	
	Attachments : Mounting Clip A		
	(2 parts for the body installation, and 2 parts for the end part installation.)	*=Equivalent	
	Option parts : Mounting Clip A, Magnet		

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)
Luci Pte. Ltd. http://www.luci.co.jp Singapore World HQ Tel: +65-6291-2410 Hong Kong Marketing Office Tel: +852-2219-8462 / Fax: +852-2219-8461 Korea Office Tel: +82-2-508-2541	LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD. Shanghai China mainland Regional HQ Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp

Side View 1

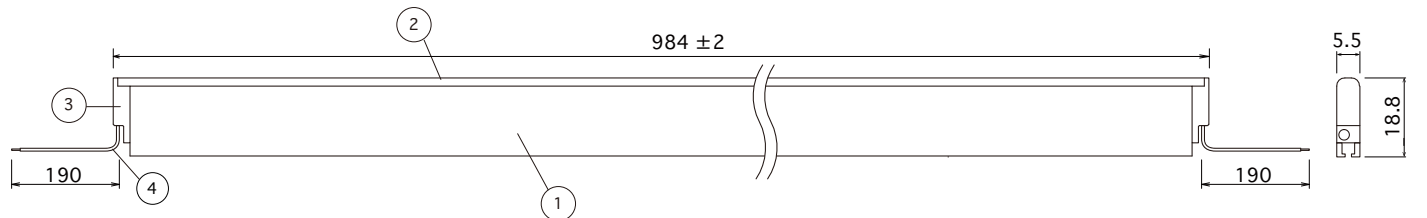

Side View 2


Option parts:
Mounting Clip A for nano line :
(LNL-PTA) (Accessories : 2 parts for the body installation, and 2 parts for the end part installation,
Option parts : 4 parts for the body installation, and 4 parts for the end part installation)

For the end part installation (5) For the body installation

Front view




Side view




Rear view

Screw hole: $\phi 3$

Installation Dimensions
(Side View)





Option parts:
Magnet for nano line
(LNL-MG) (10pcs / 1bag)

Screw hole: $\phi 1.9$

※Used for installing the light appliance with magnets.
2 optional parts per size 109, 206, or 303
lighting appliance,
3 per size 400, 498, or 595 lighting appliance,
and 4 per size 692, 789, 886, or 984 lighting
appliance is recommended.

Installation Dimensions
(Side View)



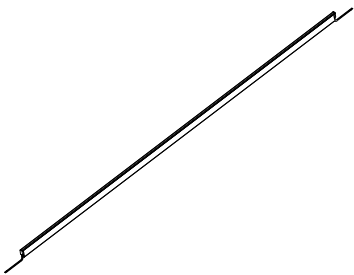	Part Name	Material	Note	Drawing
1	Body	Aluminum, alumite treatment	Silver	
2	Body Cover	Polycarbonate	Diffuser	
3	Side cover	Polycarbonate	Diffuser	
4	Lead wire		UL1007 AWG26, black+, white-	
5	Mounting Clip A	PC (Polycarbonate)	Clear	
6	Magnet	Stainless steel, Neodymium	Plate, Magnet	
7				
8				
9				
10				

Spec	Input voltage : DC24V	Light Source color : Natural white : N : 5300K (— lm/ Ra —)	Item Number
	Power consumption : 7.2W	White : W : 4200K (66 lm/ Ra 92)	LNL-0984-N-DF-I LNL-0984-W-DF-I LNL-0984-WW-DF-I LNL-0984-L30-DF-I LNL-0984-L27-DF-I LNL-0984-L24-DF-I
	Weight : 160g	Warm white : WW : 3500K (58 lm/ Ra 91)	
	Lamp fitting length(L) : 984mm	Warm white 3000K : L30 : 3000K (65 lm/ Ra 87)	
	Max. sets connectable : 5m	Warm white 2700K : L27 : 2700K (59 lm/ Ra 87)	
	Environment : Indoors (No Condensation)	Warm white 2400K : L24 : 2400K (52 lm/ Ra 85)	
	Attachments : Mounting Clip A		
	(2 parts for the body installation, and 2 parts for the end part installation.)	*=Equivalent	
	Option parts : Mounting Clip A, Magnet		

Job/Project Name

Area/Location/Circuit No.

Product Code

Qty.

Length(mm)

Luci Pte. Ltd. <http://www.luci.co.jp>E-mail: info@luci.co.jp

LUCI (SHANGHAI) LIGHTING TECHNOLOGY CO., LTD.

Singapore World HQ
Tel: +65-6291-2410Hong Kong Marketing Office
Tel: +852-2219-8462 / Fax: +852-2219-8461Korea Office
Tel: +82-2-508-2541Shanghai China mainland Regional HQ
Tel: +86-21-5238-9115 / Fax: +86-21-5238-8727 / E-mail : info@luci.co.jp