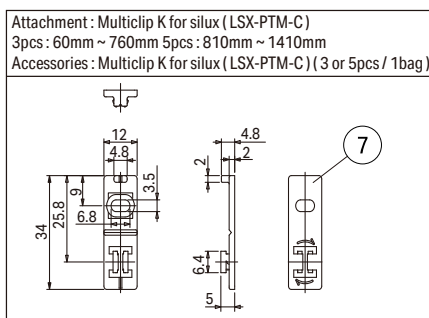
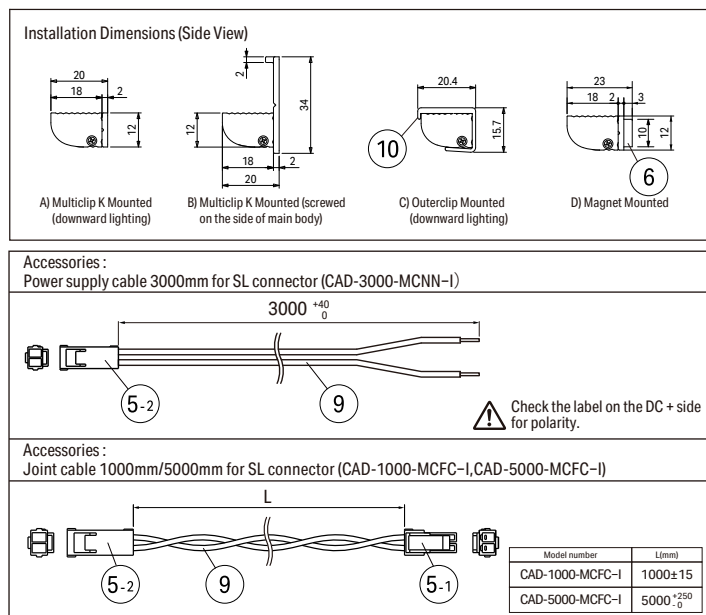

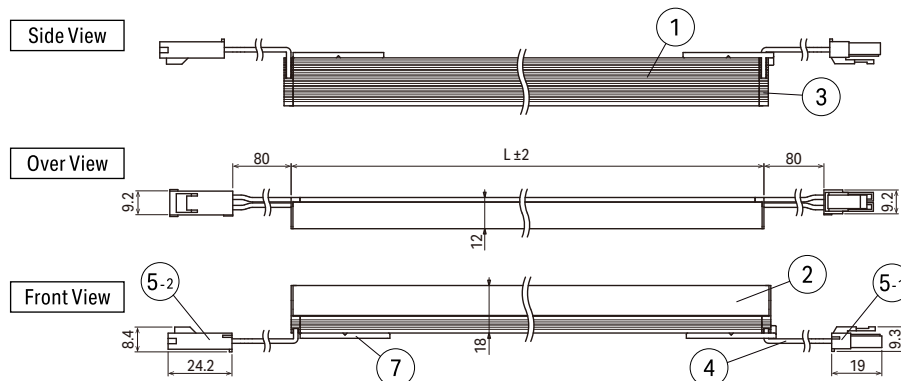


The specifications and prices are subject to change without prior notice. Unit Of Measure : mm

|    | Part Name                  | Material          | Note                         | Drawing                                                                               |
|----|----------------------------|-------------------|------------------------------|---------------------------------------------------------------------------------------|
| 1  | Body                       | Anodized aluminum | White                        |  |
| 2  | Body Cover                 | Polycarbonate     | Diffuser                     |                                                                                       |
| 3  | Side cover                 | Polycarbonate     | Diffuser                     |                                                                                       |
| 4  | Lead wire                  |                   | UL1007 AWG22, black+, white- |                                                                                       |
| 5  | Connector                  | Nylon             |                              |                                                                                       |
| 6  | Magnet                     | Neodymium magnet  | Silver                       |                                                                                       |
| 7  | Mounting Clip              | Polycarbonate     | Clear                        |                                                                                       |
| 8  | Mounting Clip (Lift clip)  | Polycarbonate     | Clear                        |                                                                                       |
| 9  | Lead wire                  |                   | UL1007 AWG20                 |                                                                                       |
| 10 | Mounting Clip (Outer clip) | Polycarbonate     | Clear                        |                                                                                       |

| Spec | Input voltage : DC24V      Weight : _ g (Refer to appendix)              | Light source color | Daylight white : D : 6500K     | Model No.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------|--------------------------------------------------------------------------|--------------------|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      | Wattage : _ W (Refer to appendix)                                        |                    | Natural white : N : 5000K      | LSXWY - [Length] - [Light source color] - DF - I - [Wattage]<br>0060 0760      D : 6500K      2 : 2.1 W / m<br>0110 0810      N : 5000K      4 : 4.2 W / m<br>0160 0860      W : 4000K      6 : 6.4 W / m<br>0210 0910      WW : 3500K      10 : 10.8 W / m<br>0260 0960      L30 : 3000K      15 : 15.9 W / m<br>0310 1010      L27 : 2700K<br>0360 1060      L25 : 2500K<br>0410 1110      L22 : 2200K<br>0460 1160      L20 : 2000K<br>0510 1210      L18 : 1800K<br>0560 1260<br>0610 1310<br>0660 1360<br>0710 1410 |
|      | Max. length per circuit : 6m (2.1W/m 4.2W/m 6.4W/m 10.8W/m) 5m (15.9W/m) |                    | White : W : 4000K              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|      | Environment : Indoors (No condensation)                                  |                    | Warm white 3500K : WW : 3500K  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|      | Operating temperature : 0℃ ~ +35℃ (No condensation)                      |                    | Warm white 3000K : L30 : 3000K |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|      | Attachments : Multiclip K (3pcs : 60mm ~ 760mm, 5pcs : 810mm ~ 1410mm)   |                    | Warm white 2700K : L27 : 2700K |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|      | Accessories : Power supply cable 3000mm,                                 |                    | Warm white 2500K : L25 : 2500K |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|      | Joint cable 1000mm,                                                      |                    | Warm white 2200K : L22 : 2200K |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|      | Multiclip K (3pcs / 1bag), Liftclip (2pcs / 1bag)                        |                    | Warm white 2000K : L20 : 2000K |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|      | Outerclip (5pcs / 1bag), Magnet attachment                               |                    | Warm white 1800K : L18 : 1800K |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |


|                  |  |                           |            |
|------------------|--|---------------------------|------------|
| Job/Project Name |  | Area/Location/Circuit No. |            |
| Product Code     |  | Qty.                      | Length(mm) |

# Specifications [LSXWY]

LSXWY - Length - Light source color - DF-I - Wattage

## Specifications by length

| Length | Fitting length<br>(L) | Wattage |        |        |         |         | Weight |
|--------|-----------------------|---------|--------|--------|---------|---------|--------|
|        |                       | 2.1W/m  | 4.2W/m | 6.4W/m | 10.8W/m | 15.9W/m |        |
| 0060   | 60.0mm                | 0.1W    | 0.2W   | 0.3W   | 0.5W    | 0.8W    | 17g    |
| 0110   | 110.0mm               | 0.2W    | 0.4W   | 0.6W   | 1.1W    | 1.6W    | 25g    |
| 0160   | 160.0mm               | 0.3W    | 0.6W   | 1.0W   | 1.6W    | 2.4W    | 32g    |
| 0210   | 210.0mm               | 0.4W    | 0.8W   | 1.3W   | 2.2W    | 3.2W    | 40g    |
| 0260   | 260.0mm               | 0.5W    | 1.1W   | 1.6W   | 2.7W    | 4.0W    | 47g    |
| 0310   | 310.0mm               | 0.6W    | 1.3W   | 1.9W   | 3.3W    | 4.8W    | 55g    |
| 0360   | 360.0mm               | 0.7W    | 1.5W   | 2.2W   | 3.8W    | 5.6W    | 72g    |
| 0410   | 410.0mm               | 0.8W    | 1.7W   | 2.6W   | 4.3W    | 6.4W    | 80g    |
| 0460   | 460.0mm               | 1.0W    | 1.9W   | 2.9W   | 4.9W    | 7.1W    | 87g    |
| 0510   | 510.0mm               | 1.1W    | 2.1W   | 3.2W   | 5.4W    | 7.9W    | 95g    |
| 0560   | 560.0mm               | 1.2W    | 2.3W   | 3.5W   | 6.0W    | 8.7W    | 102g   |
| 0610   | 610.0mm               | 1.3W    | 2.5W   | 3.8W   | 6.5W    | 9.5W    | 110g   |
| 0660   | 660.0mm               | 1.4W    | 2.8W   | 4.2W   | 7.0W    | 10.3W   | 117g   |
| 0710   | 710.0mm               | 1.5W    | 3.0W   | 4.5W   | 7.6W    | 11.1W   | 125g   |
| 0760   | 760.0mm               | 1.6W    | 3.2W   | 4.8W   | 8.1W    | 11.9W   | 132g   |
| 0810   | 810.0mm               | 1.7W    | 3.4W   | 5.1W   | 8.7W    | 12.7W   | 140g   |
| 0860   | 860.0mm               | 1.8W    | 3.6W   | 5.4W   | 9.2W    | 13.5W   | 147g   |
| 0910   | 910.0mm               | 1.9W    | 3.8W   | 5.8W   | 9.8W    | 14.3W   | 155g   |
| 0960   | 960.0mm               | 2.0W    | 4.0W   | 6.1W   | 10.3W   | 15.1W   | 167g   |
| 1010   | 1010.0mm              | 2.1W    | 4.2W   | 6.4W   | 10.8W   | 15.9W   | 175g   |
| 1060   | 1060.0mm              | 2.2W    | 4.5W   | 6.7W   | 11.4W   | 16.7W   | 182g   |
| 1110   | 1110.0mm              | 2.3W    | 4.7W   | 7.0W   | 11.9W   | 17.5W   | 190g   |
| 1160   | 1160.0mm              | 2.4W    | 4.9W   | 7.3W   | 12.5W   | 18.3W   | 197g   |
| 1210   | 1210.0mm              | 2.5W    | 5.1W   | 7.7W   | 13.0W   | 19.1W   | 205g   |
| 1260   | 1260.0mm              | 2.7W    | 5.3W   | 8.0W   | 13.5W   | 19.9W   | 212g   |
| 1310   | 1310.0mm              | 2.8W    | 5.5W   | 8.3W   | 14.1W   | 20.7W   | 220g   |
| 1360   | 1360.0mm              | 2.9W    | 5.7W   | 8.6W   | 14.6W   | 21.4W   | 227g   |
| 1410   | 1410.0mm              | 3.0W    | 5.9W   | 8.9W   | 15.2W   | 22.2W   | 235g   |



## Photometry characterristic

| Wattage 2 : 2.1W/m   |           |           |           |           |           |          |          |          |          |          |
|----------------------|-----------|-----------|-----------|-----------|-----------|----------|----------|----------|----------|----------|
| Light source color   | D         | N         | W         | WW        | L30       | L27      | L25      | L22      | L20      | L18      |
| Luminous flux        | 231lm/m   | 229lm/m   | 225lm/m   | 223lm/m   | 217lm/m   | 205lm/m  | 152lm/m  | 141lm/m  | 129lm/m  | 125lm/m  |
| Luminaire efficiency | 108.8lm/W | 107.8lm/W | 105.9lm/W | 105.0lm/W | 102.2lm/W | 96.5lm/W | 71.6lm/W | 66.4lm/W | 60.7lm/W | 58.8lm/W |

| Wattage 4 : 4.2W/m   |           |           |           |           |           |          |          |          |          |          |
|----------------------|-----------|-----------|-----------|-----------|-----------|----------|----------|----------|----------|----------|
| Light source color   | D         | N         | W         | WW        | L30       | L27      | L25      | L22      | L20      | L18      |
| Luminous flux        | 464lm/m   | 460lm/m   | 452lm/m   | 448lm/m   | 435lm/m   | 411lm/m  | 304lm/m  | 283lm/m  | 259lm/m  | 251lm/m  |
| Luminaire efficiency | 109.2lm/W | 108.3lm/W | 106.4lm/W | 105.5lm/W | 102.4lm/W | 96.8lm/W | 71.6lm/W | 66.6lm/W | 61.0lm/W | 59.0lm/W |

| Wattage 6 : 6.4W/m   |           |           |           |           |           |          |          |          |          |          |
|----------------------|-----------|-----------|-----------|-----------|-----------|----------|----------|----------|----------|----------|
| Light source color   | D         | N         | W         | WW        | L30       | L27      | L25      | L22      | L20      | L18      |
| Luminous flux        | 701lm/m   | 695lm/m   | 683lm/m   | 676lm/m   | 658lm/m   | 620lm/m  | 459lm/m  | 428lm/m  | 391lm/m  | 378lm/m  |
| Luminaire efficiency | 109.7lm/W | 108.8lm/W | 106.9lm/W | 105.8lm/W | 103.0lm/W | 97.0lm/W | 71.8lm/W | 67.0lm/W | 61.2lm/W | 59.2lm/W |

| Wattage 10 : 10.8W/m |           |           |           |           |           |          |          |          |          |          |
|----------------------|-----------|-----------|-----------|-----------|-----------|----------|----------|----------|----------|----------|
| Light source color   | D         | N         | W         | WW        | L30       | L27      | L25      | L22      | L20      | L18      |
| Luminous flux        | 1175lm/m  | 1165lm/m  | 1144lm/m  | 1134lm/m  | 1103lm/m  | 1040lm/m | 770lm/m  | 718lm/m  | 655lm/m  | 635lm/m  |
| Luminaire efficiency | 108.4lm/W | 107.5lm/W | 105.6lm/W | 104.7lm/W | 101.8lm/W | 96.0lm/W | 71.1lm/W | 66.3lm/W | 60.4lm/W | 58.6lm/W |

| Wattage 15 : 15.9W/m |           |           |           |           |          |          |          |          |          |          |
|----------------------|-----------|-----------|-----------|-----------|----------|----------|----------|----------|----------|----------|
| Light source color   | D         | N         | W         | WW        | L30      | L27      | L25      | L22      | L20      | L18      |
| Luminous flux        | 1675lm/m  | 1660lm/m  | 1630lm/m  | 1615lm/m  | 1571lm/m | 1482lm/m | 1097lm/m | 1023lm/m | 934lm/m  | 904lm/m  |
| Luminaire efficiency | 105.4lm/W | 104.5lm/W | 102.6lm/W | 101.7lm/W | 98.9lm/W | 93.3lm/W | 69.1lm/W | 64.4lm/W | 58.8lm/W | 56.9lm/W |

| Light source color | D    | N    | W    | WW   | L30  | L27  | L25  | L22  | L20  | L18  |
|--------------------|------|------|------|------|------|------|------|------|------|------|
| CRI                | Ra96 | Ra93 | Ra97 | Ra97 | Ra95 | Ra94 | Ra94 | Ra93 | Ra91 | Ra90 |

The values are measured values, not guaranteed values.